

Mixing Faucets

8" center Deckmount mixing faucet with rigid/swivel spout

Model No: W6740-8-R8E

COMPLIES WITH:

- CSA approved to CAN/CSA B125 with compliance to ANSI/ASME A112.18.1M.
- Meets ADA 5lb. force pressure requirements when optional 2 3/4" lever blade or 4" and 6" blade handles are used.
- In-line Vacuum Breaker tested and certified under ANSI/ASSE Std. 1035
 "Laboratory Faucet Vacuum Breakers".
- Listed by IAPMO.
- CSA approved to CAN/CSA B64.1.7
- Angle Vacuum Breaker tested and approved in conformance with ASSE Std. 1001 and ANSI A112.1.1 and CSA B64.1.1
- (Contact Delta Representative for State and/or Local Approvals)
- 152 mm (6") Wrist Blade Handle (ADA)ADA compliant and meets Handicapped Accessibility Standard ASME 117.1 of less than 5 lbs operating force



SPECIFICATION:


- 203mm (8") center deckmount faucet
- Two Handle
- · Heavy duty cast brass body
- Metal hold-down package
- · Field installation of spout as rigid or swivel
- · Teck Lab compression structures
- · Chrome plated brass renewable seats
- Polished chrome plate finish
- Spout: R8 Gooseneck spout- 9.0" radius-19.6" height(unmounted)-Standard rigid/swivel field installation unless LS Limited swing option selected-Vandal resistant .090" wall thickness
- Outlet#: 8 w/ 2.2 GPM Non-Vandal Resistant Aerator Outlet(-8 series)
- Handle#: E 152 mm (6") Wrist Blade Handles-ADA Compliant- Sanitary Hoods-Metal-Color indexed-Vandal resistant screws
- Indexed For: CW/HW Cold & Hot Water(Green & Red)

OPERATION:

Not Available

(Dimensional drawing on following page)



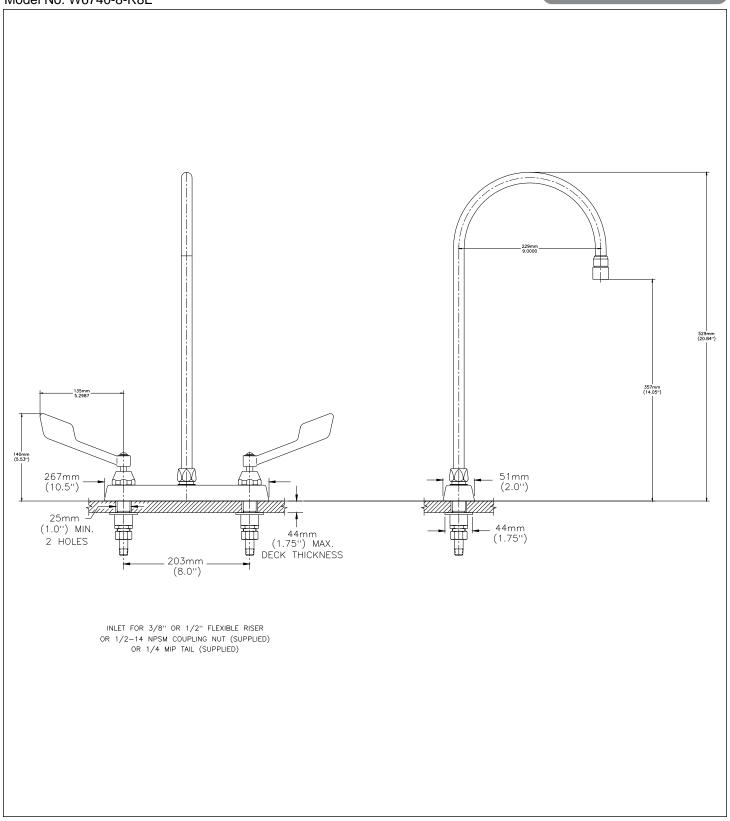

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area.