

ELKAY®

SPECIFICATIONS

Pursuit™ Single Handle Flexible Spout Laundry/Kitchen/Utility Faucet Model LK2500

- Solid brass waterway construction
- Removable ceramic disc cartridge
- One 1 3/8" (35mm) diameter faucet hole required for single hole installation, Three 1 3/8" (35mm) diameter faucet holes required for three hole installation
- 1.5GPM flow regulator installed
 - Optional 2.2GPM flow regulator also included with the faucet
- Braided stainless steel supply lines
- 3/8" female compression hose connections with 1/2" male IPS thread adaptors
- Flexible stainless steel spout for maximum clearance and adjustment
- Max counter thickness: 2.5" (63mm)
- 2-function hand spray (Aerated, Spray)
- hand spray operation:
 - Rotate end of spout to switch from spray to stream
 - Forward-Only handles = No backsplash interference
- Available finishes:
 - Chrome LK2500CR
- Ship weight: 4.5 lbs (2.1 kg)

WARRANTY


- Limited Lifetime

ACCESSORIES (Sold Separately):


- LK105 - Air gap
- LK320 - Soap dispenser

COMPLIES WITH:


- ADA
- cUPC
- ANSI/NSF61
- CA AB1953
- ASME A112.18.1/CSA B125.1

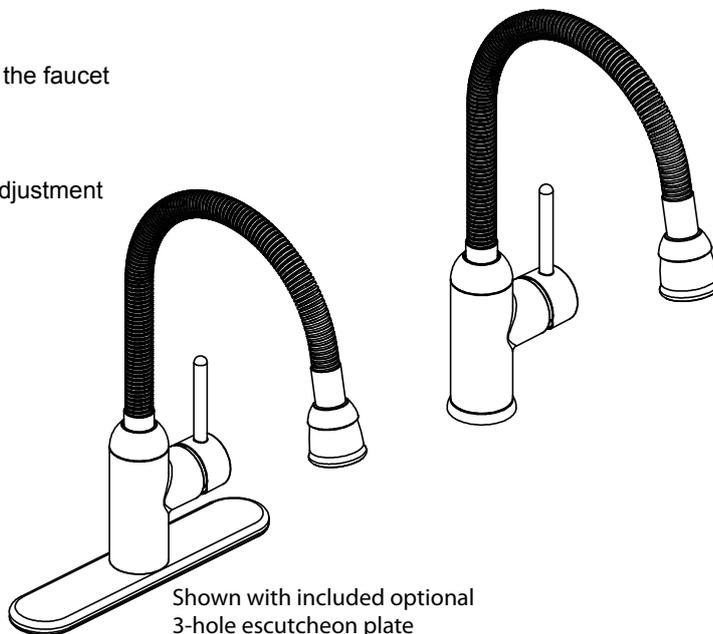


Shown with included optional 3-hole escutcheon plate

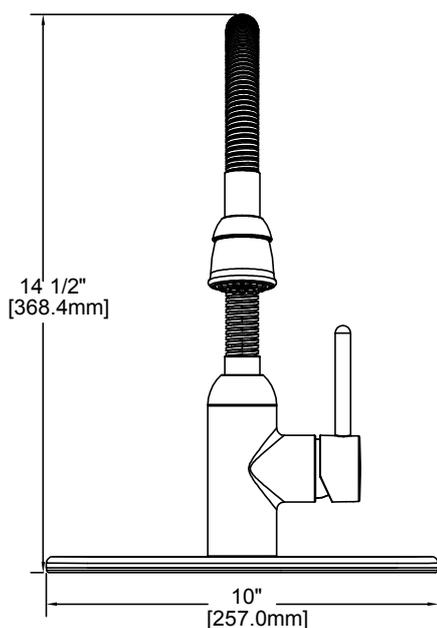

With 3-hole escutcheon

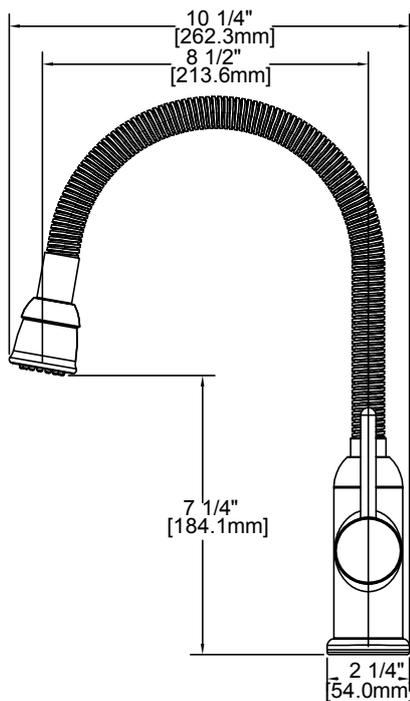

With 3-hole escutcheon

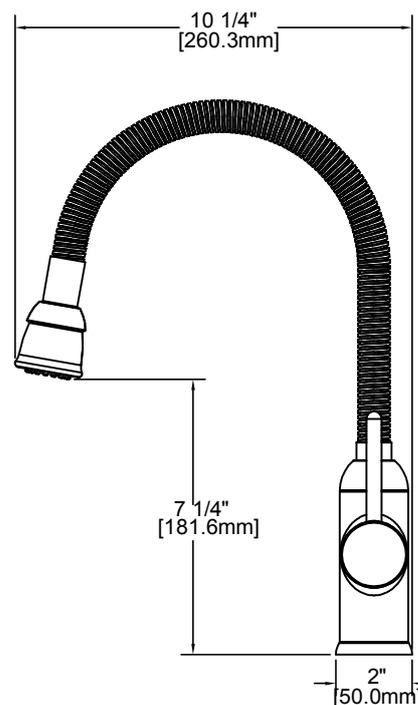

Elkay

elkayusa.com

2222 Camden Court, Oak Brook, IL 60523

1-630-574-8484 Fax: 1-630-574-4509

©2011 Elkay

LK2500_A (7/11)