

ELKAY®

SPECIFICATIONS

EZH20™ System

Vandal-Resistant Cooler/Bottle Filling Station

Models VRC(8,D)WSK & VRCTL(R)(8,DD)WSK


PRODUCT FEATURES

- Vandal-resistant design ideal for high-traffic installations.
- Green Ticker™ indicates the quantity of plastic water bottles saved from waste. Protected behind tempered glass.
- Easy-to-operate vandal-resistant pushbutton activation.
- Quick bottle fill rate - 1.1 GPM on refrigerated models; 1.5 GPM on non-refrigerated
- Laminar flow provides minimal splash with 30-second auto shut-off. Recessed orifice to prevent contamination.
- Vandal-resistant bubbler on basin.
- Real drain system – no standing water for disposal.
- Embossed graphics to ease of usability
- Easy to clean stainless steel exterior

SUGGESTED SPECIFICATION

Models VRC(TL(R))8WSK shall provide 8.0 GPH of 50°F water at 90°F ambient and 80°F inlet water. Models VRC(TL(R)D)WSK shall provide ambient drinking water. Stainless steel construction. Shall include real drain system. Shall include tamper-resistant pushbutton activation. Bottle Filler shall provide 1.1-1.5 GPM flow rate with recessed orifice, laminar flow and 30-second auto water shut-off. Shall include Green Ticker to display the quantity of plastic water bottles saved with tempered glass protection. Shall meet ADA guidelines. Shall be lead-free design and compliant with NSF/ANSI 61 and 372. Shall be compliant with UL399 and CAN/CSA 22.2 No. 120.

IMAGES

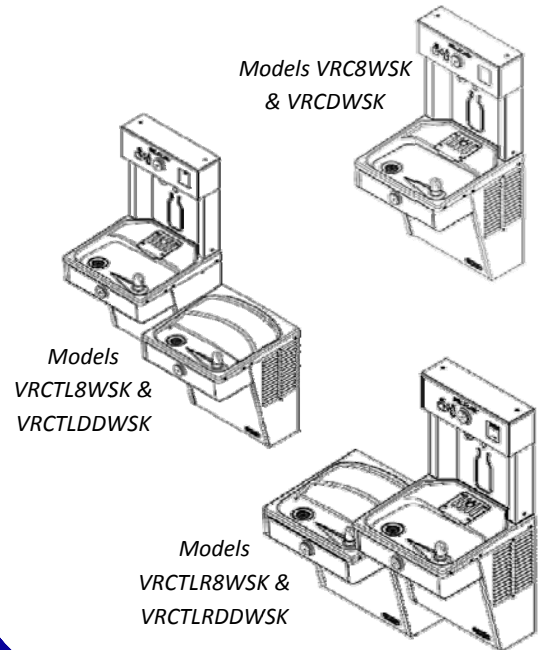

- 36292C Receptacle Plug

ACCESSORIES

Ideal in high-traffic installations such as:

- Educational facilities
- Indoor recreational areas

APPLICATIONS

Compliant to:

- UL399 and CAN/CSA 22.2 No. 120
- NSF/ANSI-61
- NSF/ANSI 372 (Lead-Free Compliance)
- ADA Standards for Accessible Design




EZH20™ System
Vandal-Resistant Cooler/Bottle Filling Station
Models VRC8WSK & VRCDWSK

ELKAY®
ROUGH-IN DIMENSIONS

Job Name: _____
 Date: _____ Qty: _____
 Contact Info (Name, Phone, Email, Fax): _____

 Approval for Manufacture (Signature & Date): _____

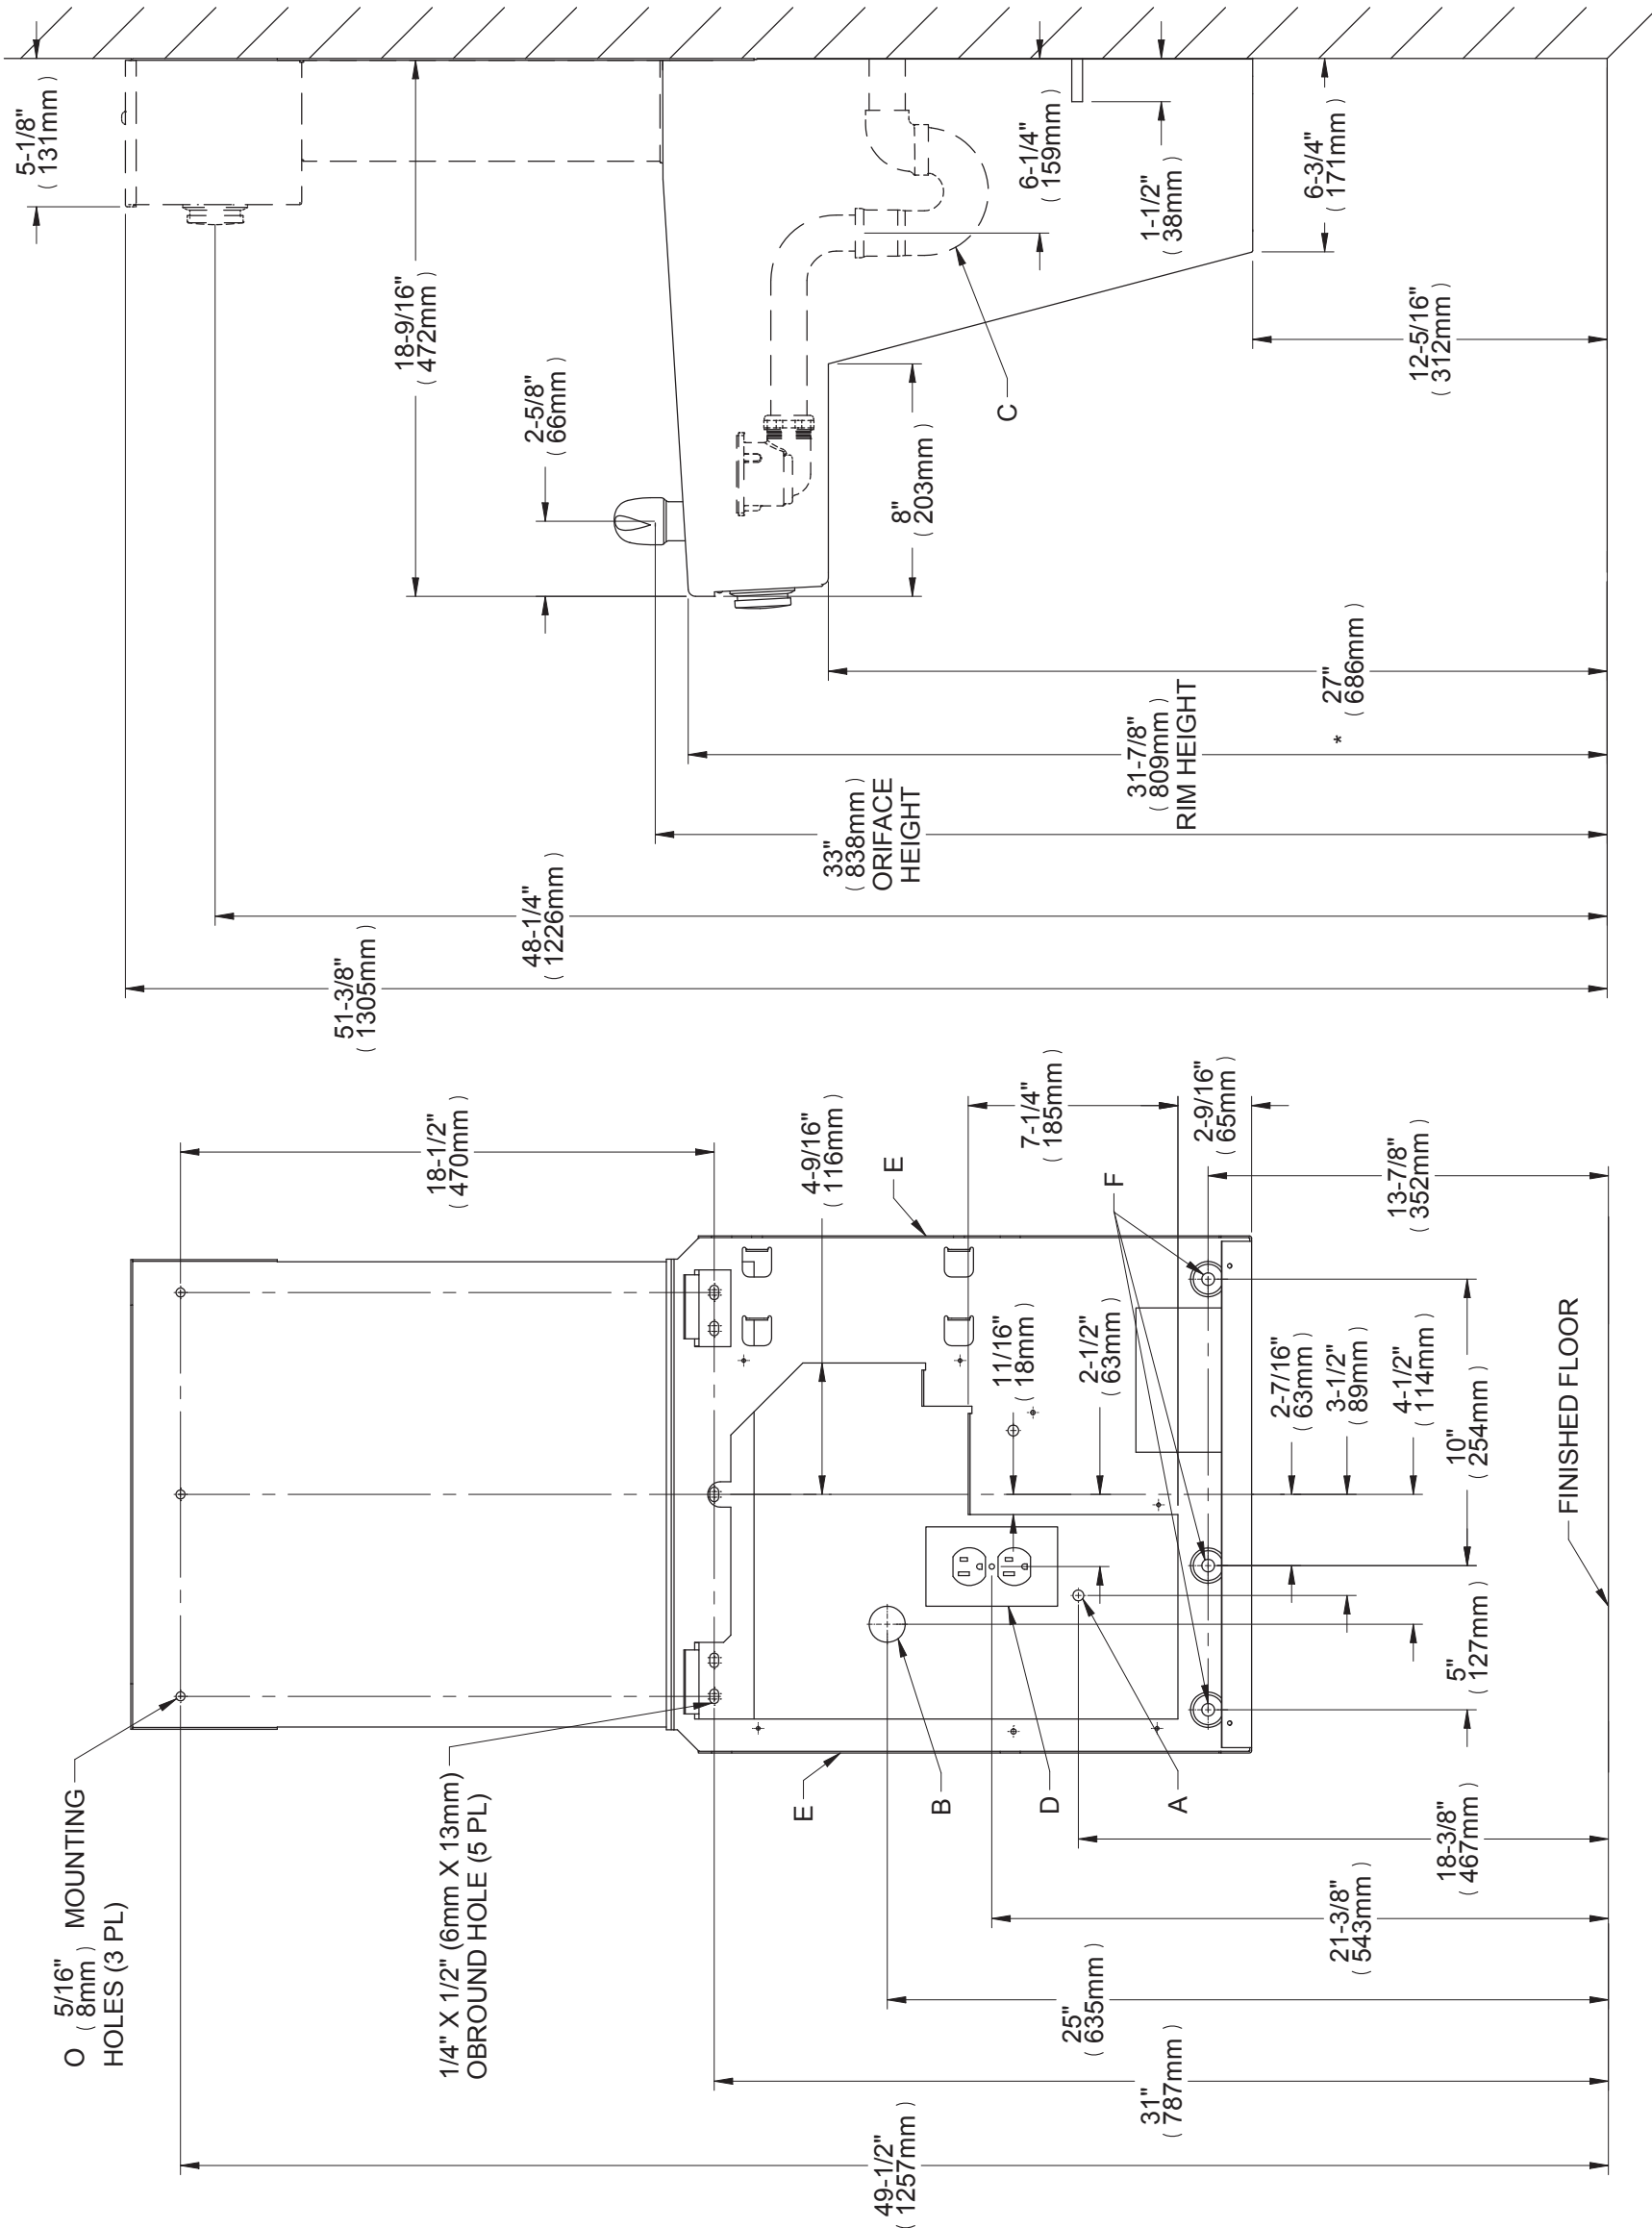


LEGEND:
 A = Recommended Water Supply Location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube.
 B = 3" (76mm) maximum out from wall.
 C = Recommended Waste Outlet Location. To accommodate 1-1/2" nominal drain.
 D = 1-1/4" Trap (not furnished)
 E = Electrical Supply (3) Wire Recessed Box Duplex Outlet
 F = Insure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.
 G = 7/16" bolt holes for fastening unit to wall

EZH20™ System
Vandal-Resistant Cooler/Bottle Filling Station
Models VRCTL8WSK & VRCTLDDWSK

ELKAY®
ROUGH-IN DIMENSIONS

Job Name: _____
 Date: _____ Qty: _____
 Contact Info (Name, Phone, Email, Fax): _____

 Approval for Manufacture (Signature & Date): _____

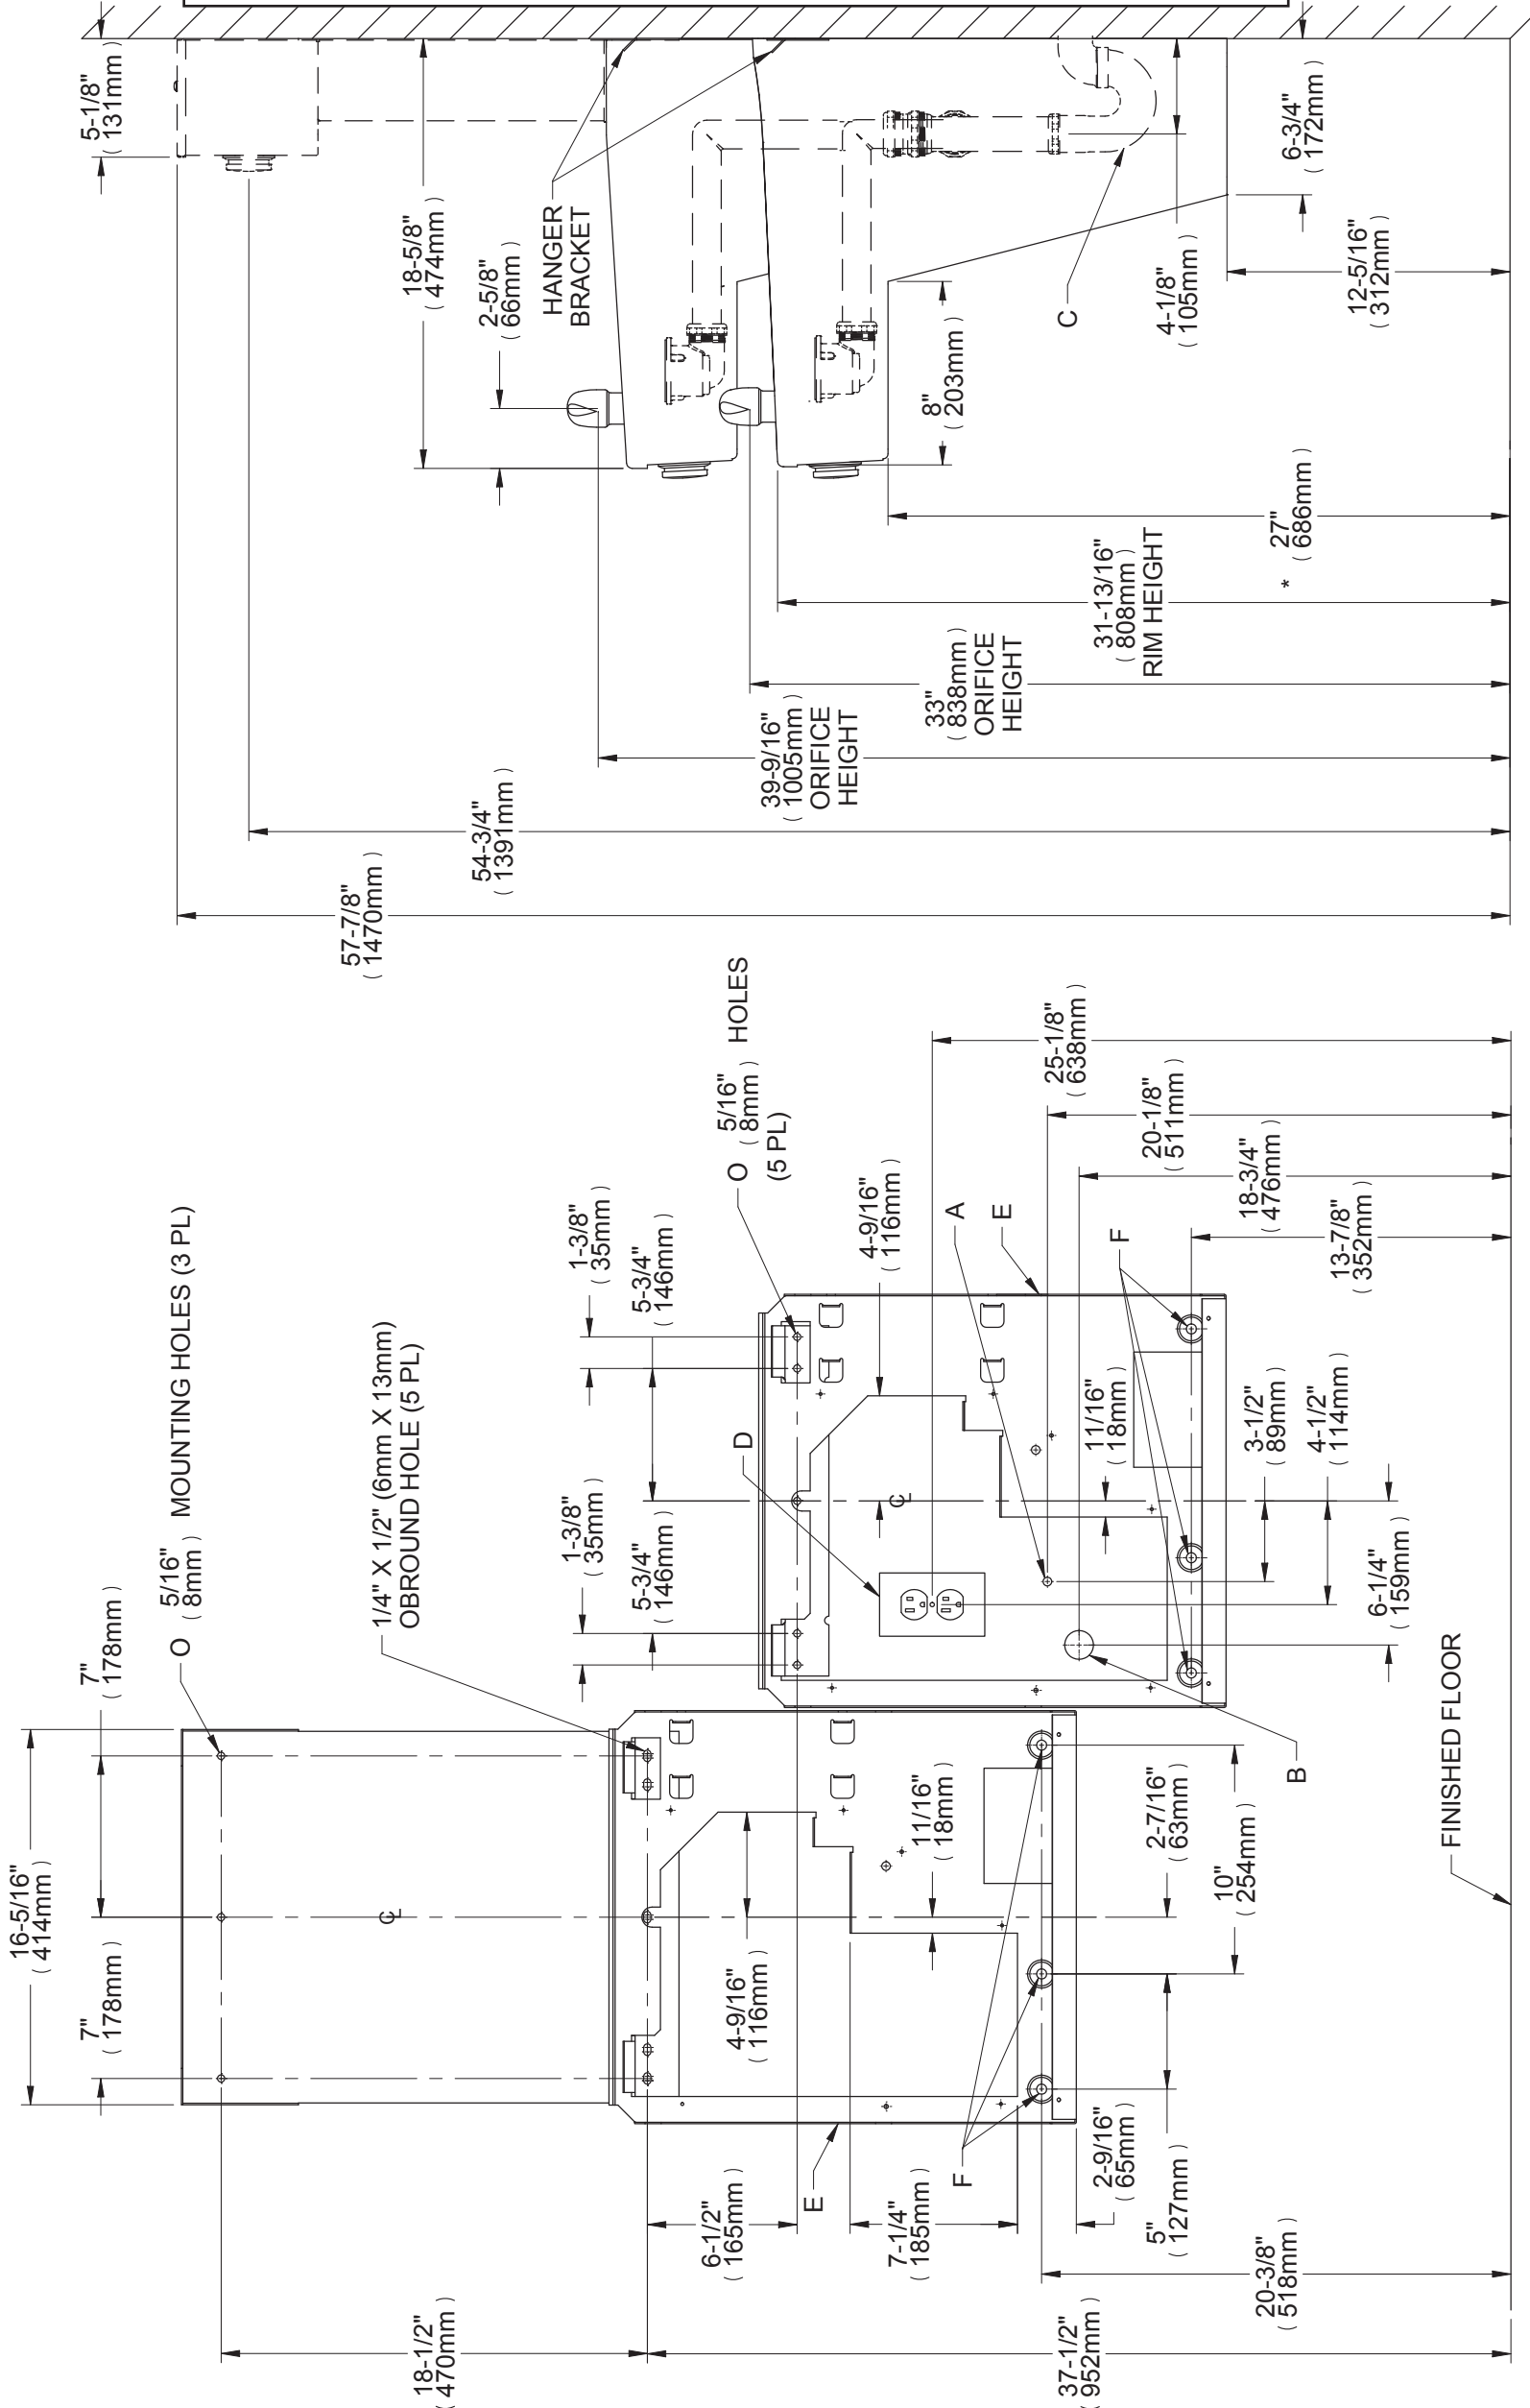


LEGEND:
 A = Recommended Water Supply Location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube.
 B = 3" (76mm) maximum out from wall.
 C = Recommended Waste Outlet Location. To accommodate 1-1/2" nominal drain.
 D = 1-1/2" Trap (not furnished)
 E = Electrical Supply (3) Wire Recessed Box Duplex Outlet
 F = Insure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.
 G = 7/16" bolt holes for fastening unit to wall

EZH20™ System
Vandal-Resistant Cooler/Bottle Filling Station
Models VRCTLR8WSK & VRCTLRDDWSK

ELKAY®
ROUGH-IN DIMENSIONS

Job Name: _____
 Date: _____ Qty: _____
 Contact Info (Name, Phone, Email, Fax): _____

 Approval for Manufacture (Signature & Date): _____

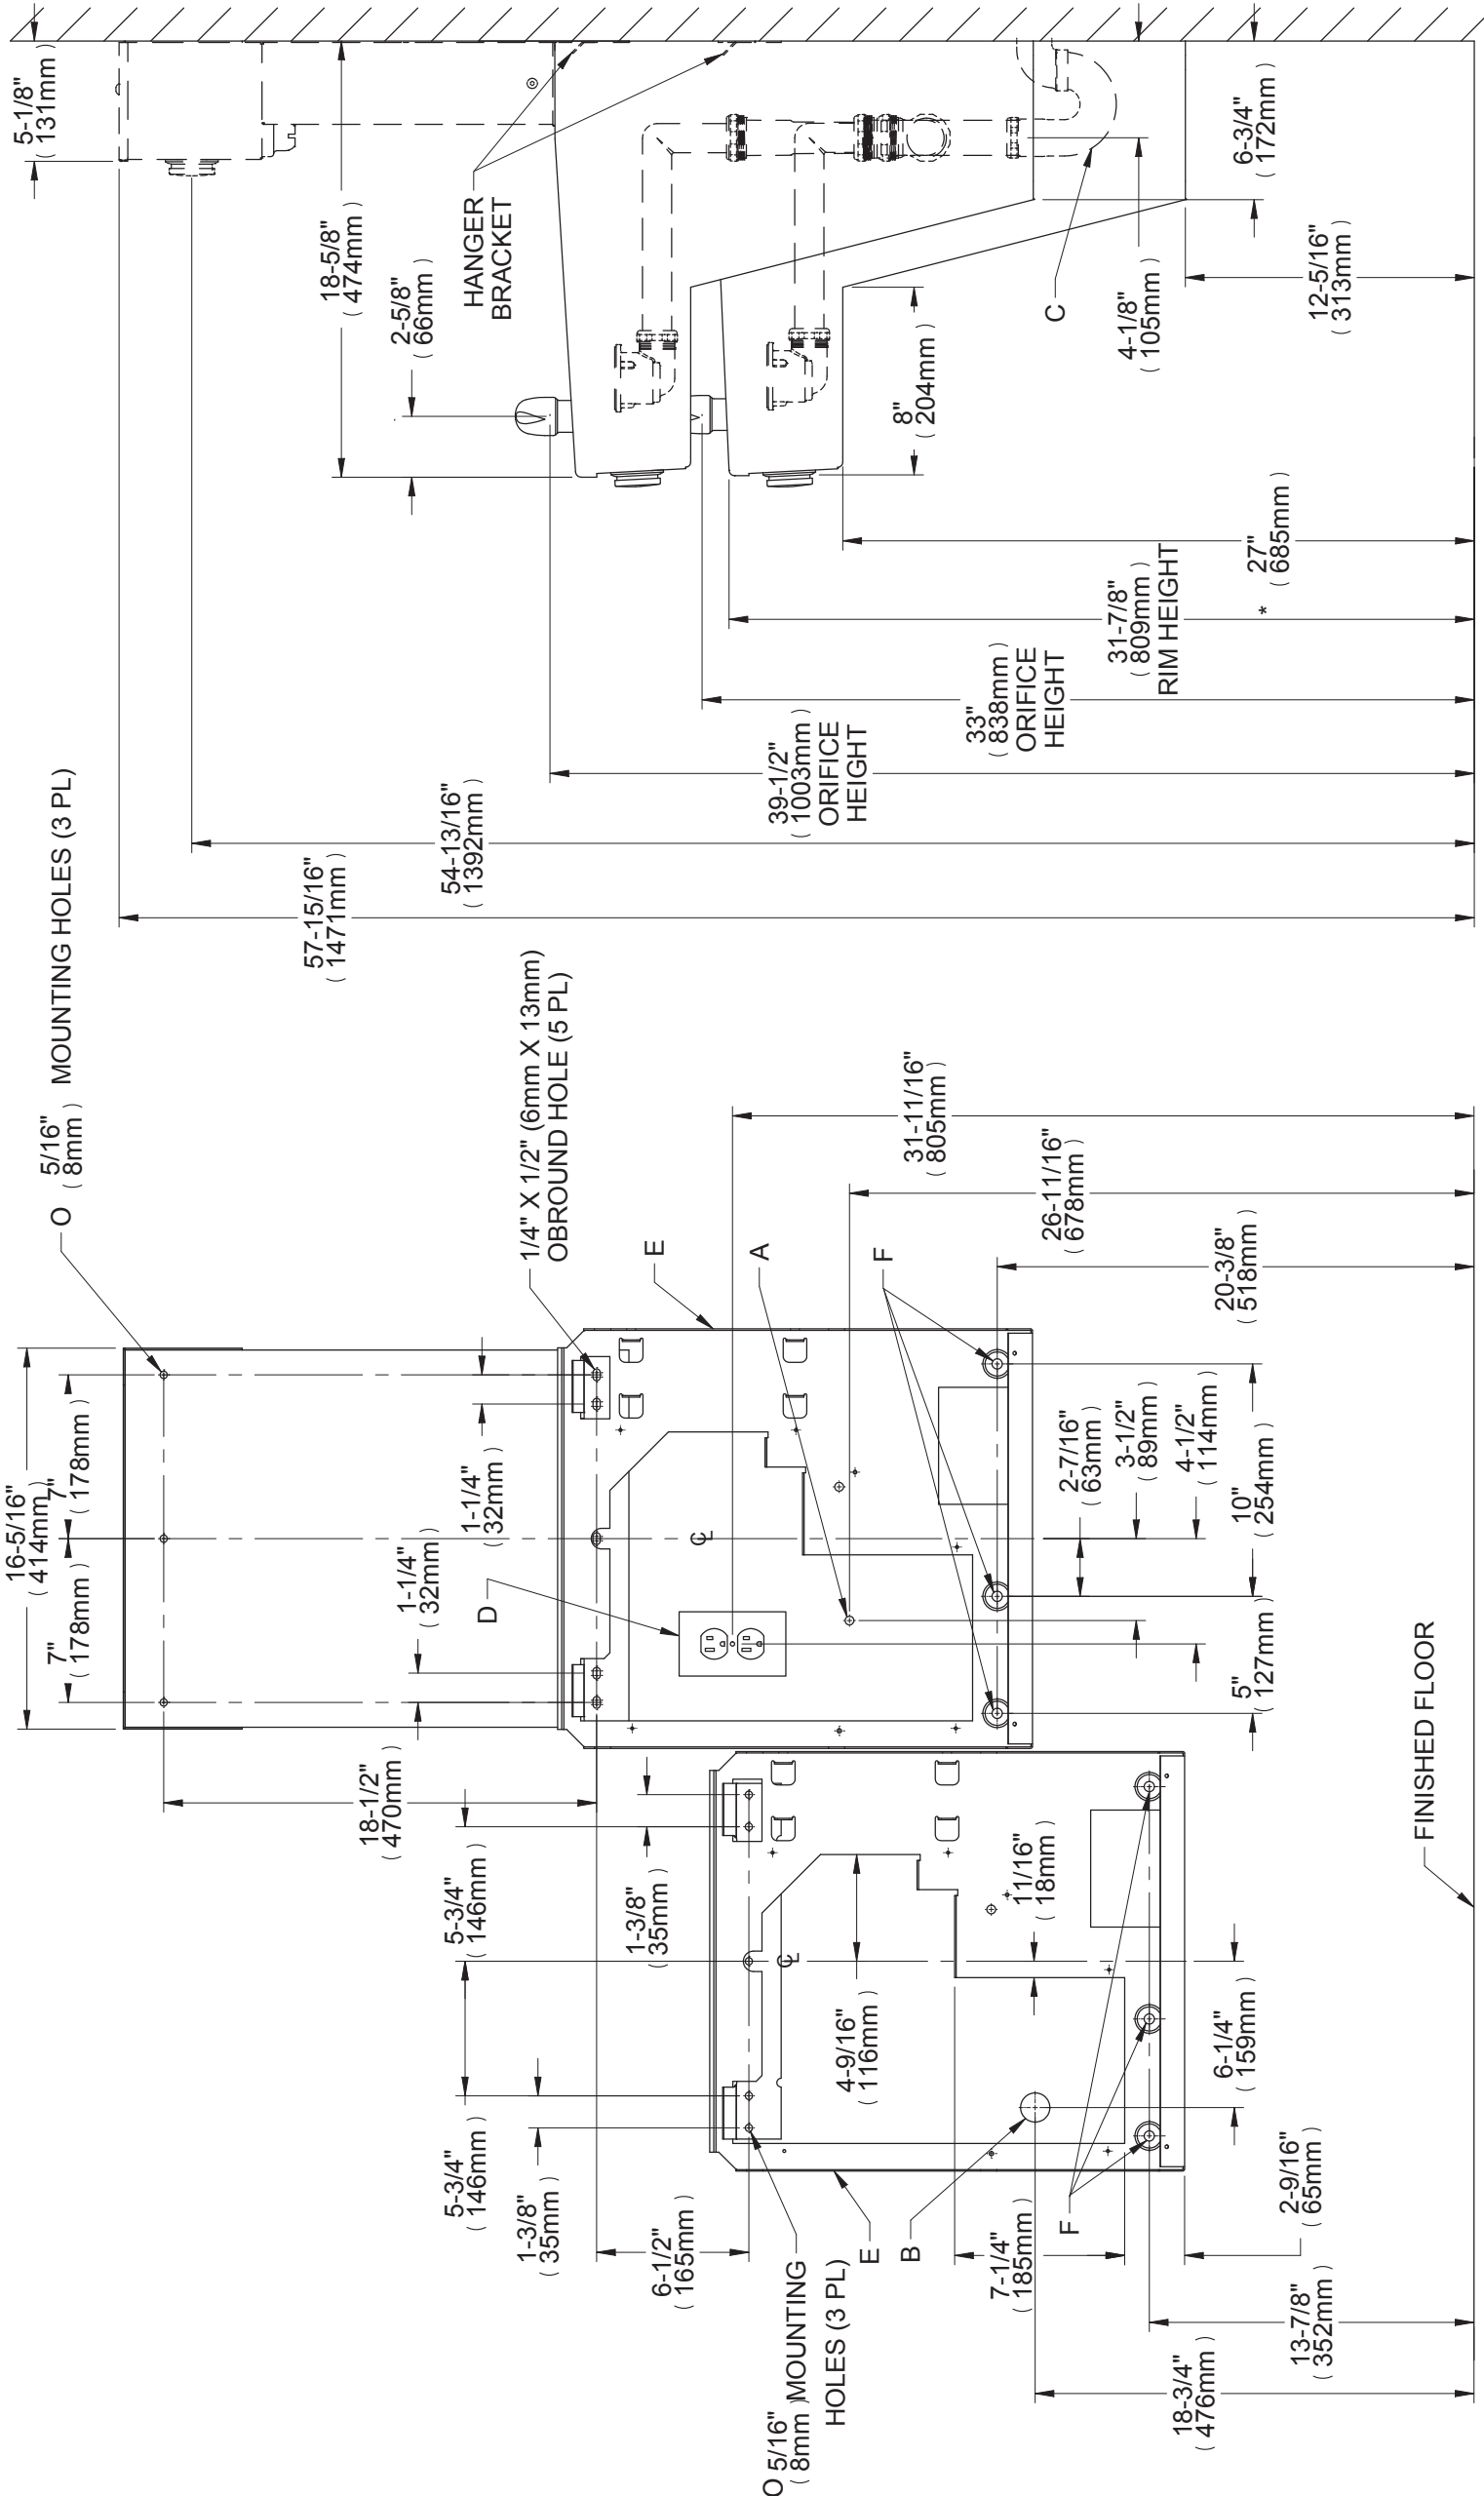

- LEGEND:**
- A = Recommended Water Supply Location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube. 3" (76mm) maximum out from wall.
 - B = Recommended Waste Outlet Location. To accommodate 1-1/2" nominal drain.
 - C = 1-1/2" Trap (not furnished)
 - D = Electrical Supply (3) Wire Recessed Box Duplex Outlet
 - E = Insure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.
 - F = 7/16" bolt holes for fastening unit to wall