
The Levon

FP79100B



SPECIFICATION SHEET

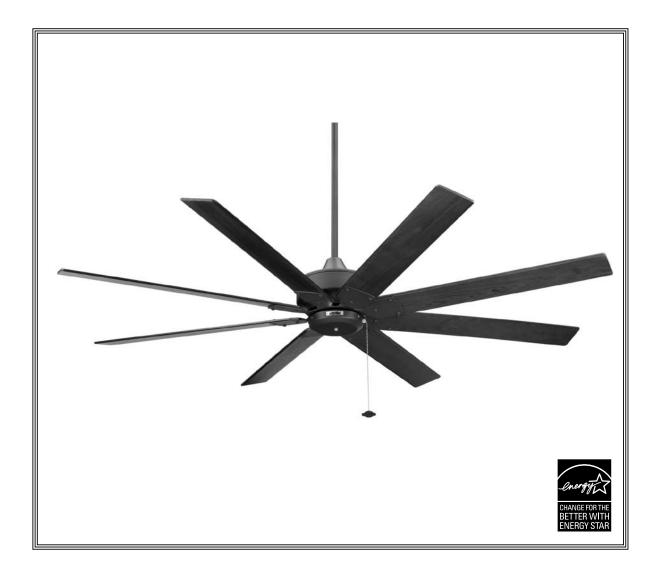


celebrating 25 years

Product Specifications subject to change

LEVON™ FP79100B Ceiling Fan



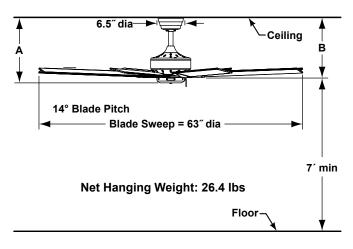

	Α	В
Fan w/6" downrod	14.50″	12.00"
Fan w/12" downrod	20.50"	18.00"
Fan w/18" downrod	26.50"	24.00"
Fan w/24" downrod	32.50"	30.00″
Fan w/36" downrod	44.50″	42.00"
Fan w/48" downrod	56.50"	54.00"
Fan w/60" downrod	68.50″	66.00"
Fan w/72" downrod	80.50″	78.00″

Available Finish

Oil-rubbed bronze

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

Airflow / Energy Efficiency Info (120V)						
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts	
High	105	5605	84	0.57	67	
Med	67	3537	118	0.38	30	
Low	36	1918	174	0.23	11	

OB

BLADES:

A set of eight walnut finish wood blades is included.

CONTROL OPTIONS:

Optional C1, C2 and C25* wall controls and C4 remote control with receiver unit are available—sold separately. Instructions are provided with each control.

*C25 wall control must be used with C4 remote control

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.







