

Product Features

- Solid brass
- Max. flow rate 6.6 GPM
- Quick Clean™ aerator
- Dual threaded mounting piece - 3/4" NPT male, 1/2" NPT female


Code Compliance

This unit meets or exceeds the following:

- ASME A112.18.1 / CSA B125.1
- Listed by IAPMO

Available Finishes

Chrome	14148001
Oil Rubbed Bronze	14148621
Brushed Nickel	14148821
Rubbed Bronze	14148921

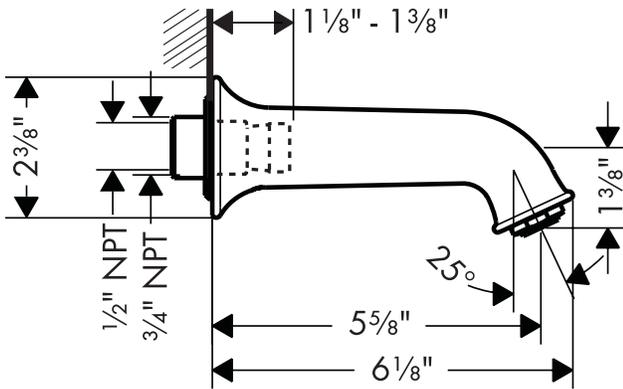

Installation Notes

- Requires either 3/4" NPT female or 1/2" NPT male fitting, recessed 3/8" behind surface of finished wall

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 10/2010

Product data sheet (PDF)

C Pressure Balance Trim

Description

- . Temperature and volume control for 1 outlet
- . Lever handle
- . Flow 6.5 GPM @ 44 PSI
- . 7/8 " shallow extension set # 13596xx0

Finishes

Art. no.


Price excl. VAT


Finishes	Art. no.	Price excl. VAT
chrome	15404001	160,00 \$
brushed nickel	15404821	225,00 \$
polished nickel	15404831	192,00 \$

Product image



Scale drawing

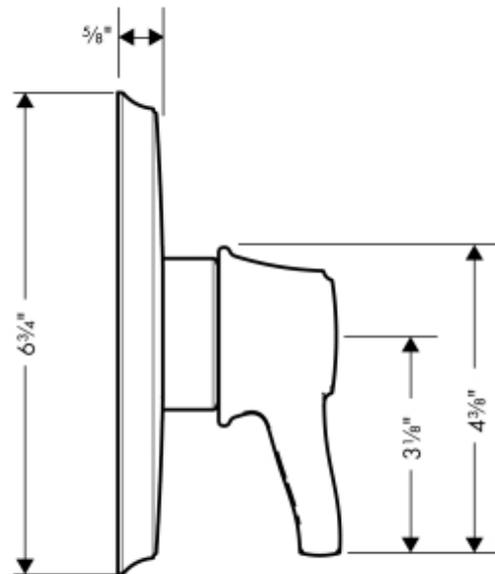

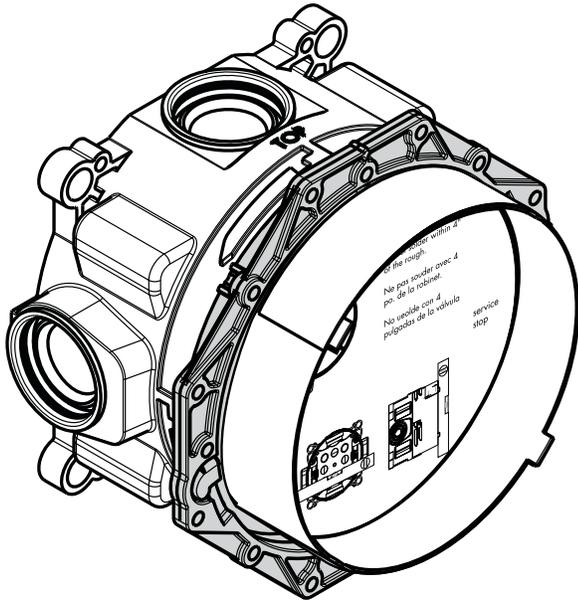

Product Features

- 4-port universal rough w/service stops
- 3/4" inlets and outlets
- Includes three 1/2" reducers, one 3/4" plug, seal
- Rough valve for several types of shower valves: thermostatic mixer; thermostatic mixer with volume control; thermostatic mixer with volume control/diverter; pressure balance valve
- Also rough for Raindance Rainfall 28411XX1


Code Compliance

This unit meets or exceeds the following (when installed with trim kit):

- ASME A112.18.1
- CSA B125.1
- Listed by IAPMO

Required Accessories

Trim kit – many styles available

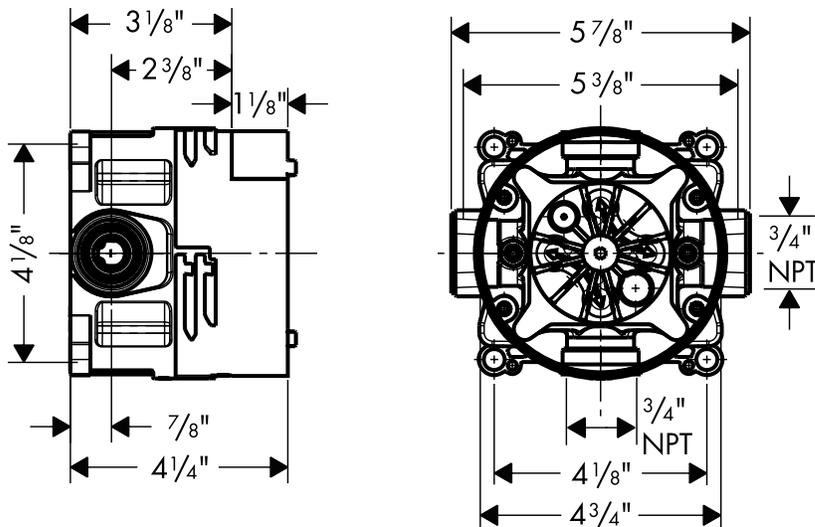

Optional Accessories

1" extension (deep rough-in)

13595000

Mounting kit

96615000

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 1/2010