




Family: Bloom | Item No. 4379 PL



Drawing 1 - Fixture Assembly

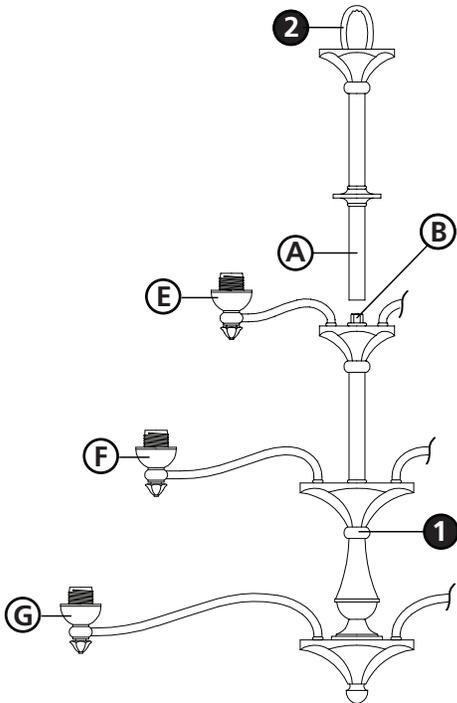

Drawing 2 - Fixture Assembly

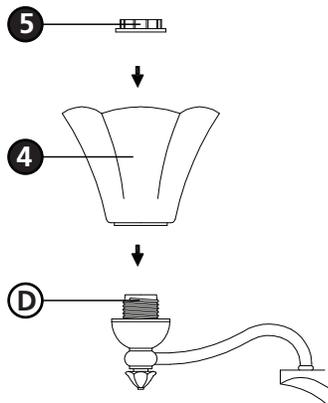

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

*** The construction of this fixture will be accomplished by first partially assembling the main body of the fixture, installing the required mounting braces, mounting the mounting strap to the junction box, making all necessary electrical connections, hanging the fixture from the ceiling and then completing the assembly of the main fixture.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Thread nipple (A) of center column assembly (2) into coupler (B), located on the top of the main body assembly (1) - see **Drawing 1**.
2. Starting with the top 3 arms (E), spread them apart so they are evenly spaced 120 degrees apart.
3. Spread arms (F) of the second tier apart until they are equally spaced 60 degrees apart, and are positioned, so that every other arm is between the top tier arms (E).
4. The bottom tier arms (G) are to be spread so they are equally spaced 60 degrees apart and each arm is spaced evenly between the arms of the second tier (F).
5. Please refer to **I.S. 19-50** to properly hang fixture from ceiling. then refer back to this sheet to continue fixture installation.

3

1. Remove socket ring (5) from socket (D) - see **Drawing 2**.
2. Slip glass (4) over socket (D).
3. Thread socket ring (5) onto socket (D) and tighten until snug.
Note: Over tightening ring with a tool may cause damage to the glass.

Note: Maximum wattage for 4379 fixture is 40 watts per bulb.

1.26.09