



Family: Trellis | Item No. 1432



Drawing 1 - Fixture Assembly

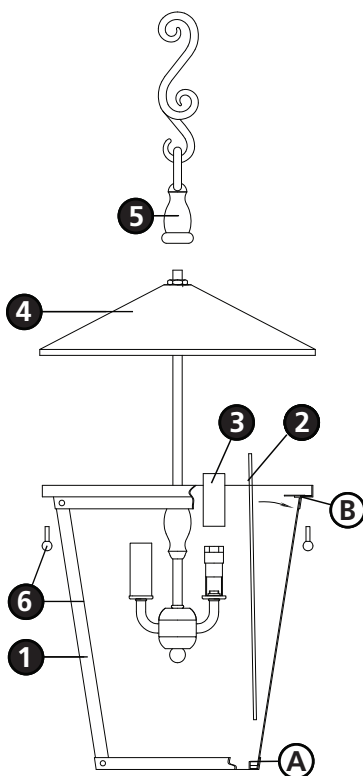

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first installing the glass, completing the main roof assembly, installing the mounting hardware, hanging the main roof assembly, making all necessary wiring connections, and then attaching the cage assembly to the roof.**

2

1. To install glass, slip bottom edge of glass panel (2) into channel (A) at bottom of cage assembly (1) - see **Drawing 1**.
2. Slip top of glass panel (2) under tab (B) at top of cage, and bend tab over edge of glass to secure panel. Note: cut gasket material supplied to size and place between clip and glass.
3. slip candle sleeve (3) over socket.

3

1. To complete fixture assembly, slip loop (5) along wire and thread onto stem on top of roof (4) and tighten to secure - see **Drawing 1**.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer to the hanging instruction sheet (I.S. 19) provided to complete installation of this fixture. Then refer back to this sheet to lamp fixture.

4

1. Fixture can now be lamped accordingly.
2. Slip cage assembly (1) into roof assembly. line up mounting holes in edge of cage with holes in roof (4) - see **Drawing 1**.
3. Slip ball knob stud (6) through hole in cage and thread into roof to secure cage.

Note: Maximum wattage for 1432 fixture is 60 watts per bulb.

10.1.10