

Product Information

Applicable product:		K-1164-HB	
Bath whirlpool		K-1164-HB	
Fixture*:			
Bathing well:			
Basin area, bottom	55-1/4" (140.3 cm) x 23-1/2" (59.7 cm)		
Basin area, top	64-1/2" (163.8 cm) x 32" (81.3 cm)		
Weight	112 lbs (50.9 kg)		
To overflow:			
Water depth	15" (38.1 cm)		
Capacity	75 gal (284.1 L)		
* Approximate measurements for comparison only.			
Included components:			
Cut-out template		1042557-7	
Pump:	V	Hz	A
1-speed	120	60	7.5
Heater:	kW	V	Hz
1.5	120	60	12.5

Minimum access panel pump/control:	
20" (50.8 cm) W x 15" (38.1 cm) H	required

Required Electrical Service

Two dedicated circuits are required, each protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (61 cm) of the pump and heater.	


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 36 lbs/square foot (177 kg/square meter) loading.


The suction line extends 1" (2.5 cm) beyond the edge of the rim. The pump base extends 1-1/8" (2.9 cm) beyond the edge of the rim. Modify the framing as needed.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

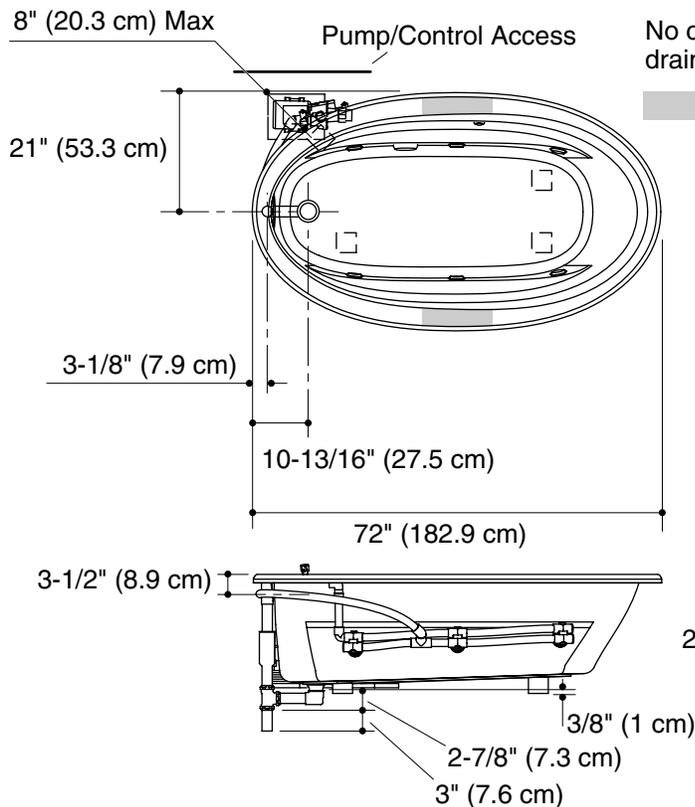

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Recommended faucet area



Drop-In Rim Detail

