


**KITCHEN SINK FAUCET  
K-15175**

ADA

**Features**

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit stop for added safety
- 2.2 gpm (8.3 lpm) flow rate
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Lever or loop handle
- Available with 8-1/2" (21.6 cm) or 10" (25.4 cm) swing spout
- 22" (55.9 cm) long stainless steel flexible hose connections

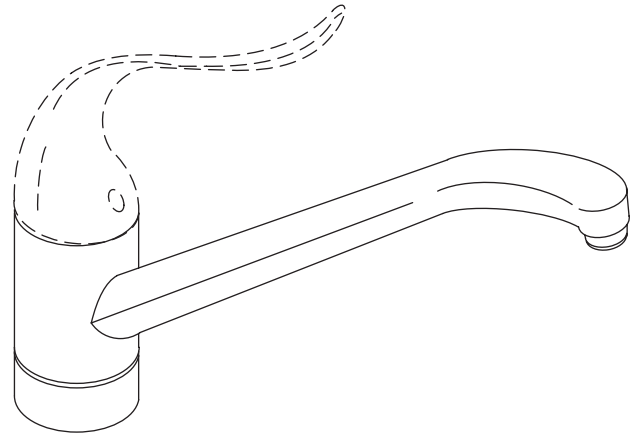

**Codes/Standards Applicable**



Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- ADA

**Colors/Finishes**

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

**Specified Model**

Model	Description					
K-15175-F	Kitchen sink faucet with 8-1/2" (21.6 cm) swing spout	<input type="checkbox"/> CP				
K-15175-FT	Kitchen sink faucet with 10" (25.4 cm) swing spout	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____		
K-15175-FL	Kitchen sink faucet with 10" (25.4 cm) swing spout				<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____


**Product Specification**

Single-control kitchen sink faucet shall be of metal construction. Valve shall be a one-piece, self-contained ceramic disc valve, which allows volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Valve shall include a high-temperature limit stop. Faucet shall include 8-1/2" (21.6 cm) or 10" (25.4 cm) swing spout, lever or loop handle, and 22" (55.9 cm) long stainless steel flexible hose connections. Faucet shall be rated at 2.2 gallons (8.3 L) per minute. Faucet shall have lower flow aerator options. Faucet shall be Kohler Model K-15175-\_\_\_\_\_-\_\_\_\_\_.

# CORALAIS®

## Installation Notes

Install this product according to the installation guide.

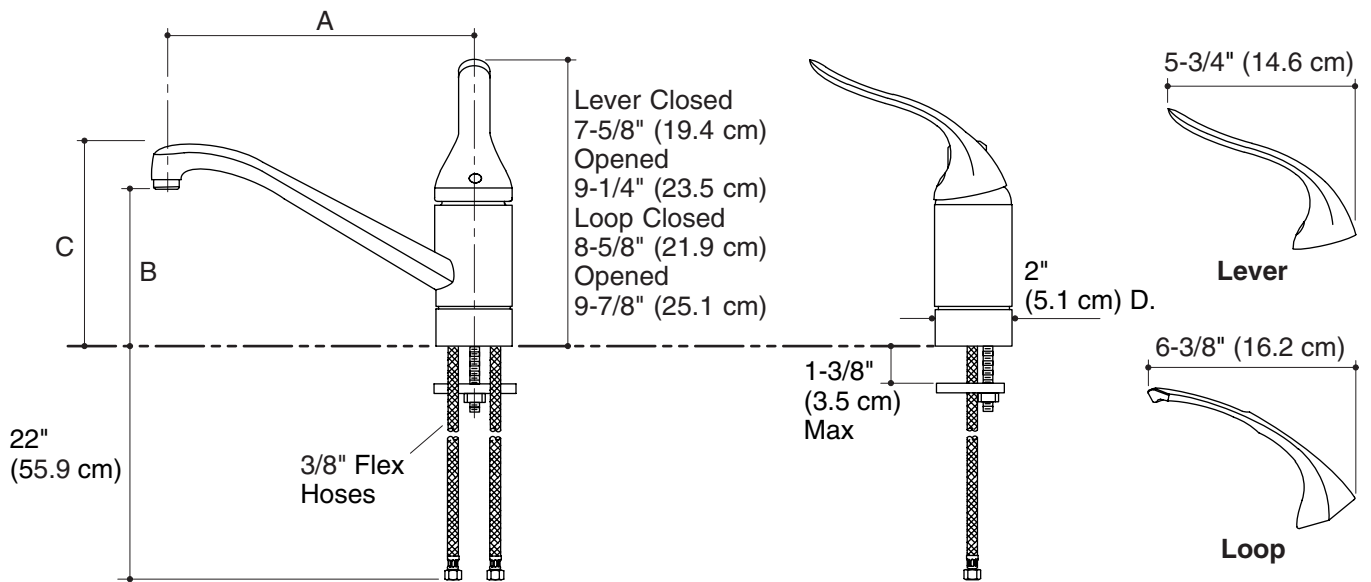

	A	B	C
K-15175-F	8-1/2" (21.6 cm)	5-1/8" (13 cm)	6-1/4" (15.9 cm)
K-15175-FT, K-15175-FL	10" (25.4 cm)	6-1/4" (15.9 cm)	7-1/4" (18.4 cm)

### Product Diagram