


#### Features

- Mounts within a standard 2x4 wall
- Digitally controlled
- High-temperature limit setting for added safety
- One-touch control of the Fountainhead™ Bath functionality
- Controls handshower and bath spout when installed with the optional DTV™ Six-Port Thermostatic Valve
- Interface installs after finished wall is complete
- Interface is available with a 30 ft (9.1 m) cable
- Custom and pre-programmed bathing experiences
- 6 user presets
- Low profile design
- Easy to clean

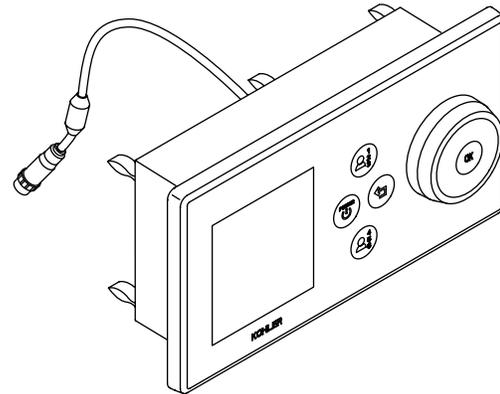

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- Underwriters Laboratories (UL)
- FCC Part 15

#### Colors/Finishes

- 1CP: Complements Chrome Finishes
- 1SN: Complements Nickel Finishes
- 1AF: Complements French Gold and Brushed Bronze

#### Accessories:

- 0: White
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

#### Specified Model

Model	Description	Colors/Finishes		
K-176	Digital interface	<input type="checkbox"/> 1CP	<input type="checkbox"/> 1SN	<input type="checkbox"/> 1AF

Required Accessories			
K-175-K	DTV—Bath media module <b>AND</b>	<input type="checkbox"/> NA	
K-1143-L	Fountainhead™ 88" (223.5 cm) vessels bath, left drain <b>OR</b>	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1143-R	Fountainhead 88" (223.5 cm) vessels bath, right drain <b>OR</b>	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1152-L	Fountainhead 72" (182.9 cm) drop-in bath, left drain <b>OR</b>	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1152-R	Fountainhead 72" (182.9 cm) drop-in bath, right drain <b>OR</b>	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1153-L	Fountainhead 72" (182.9 cm) vessels bath, left drain <b>OR</b>	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1153-R	Fountainhead 72" (182.9 cm) vessels bath, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

#### Product Specification

The digital interface shall mount within a standard 2x4 stud wall. Product shall include a high-temperature limit setting for added safety. Product shall feature one touch control of Fountainhead Bath functionality as well as handshower and bath spout when installed with the DTV valve. Product interface shall install after finished wall is complete. Interface is available with a 30 ft (9.1 m) cable, 6 programmable user presets, and low profile design. Product shall have custom and pre-programmed bathing experiences, and shall be easy to clean. Product shall be Kohler Model K-176-\_\_\_\_\_.

# DTV™—BATH

## Optional Accessories

K-682-K	DTV™ Six-Port Thermostatic Valve <b>AND</b>	<input type="checkbox"/> NA
K-179	Spout adapter kit	<input type="checkbox"/> NA

## Installation Notes

Install this product according to the installation guide.

Wall sleeve will accommodate finished wall thickness of 3/16" (0.5 cm) to 2" (5.1 cm).

End wall installation requires a 2x6 wall construction.

