


### Features

- Acrylic
- For corner installation
- 120 BubbleMassage™ airjets
- Blower motor is supplied with a grounding-type plug-in cord
- Integral flange
- Molded lumbar supports and armrests
- Blower motor with 300 W heater and electronic user control
- Integral apron with removable panel for front access
- 60-9/16" (1538 mm) x 60-9/16" (1538 mm) x 21" (533 mm)

### CORNER BATH WITH AIRJETS K-1160-GLA

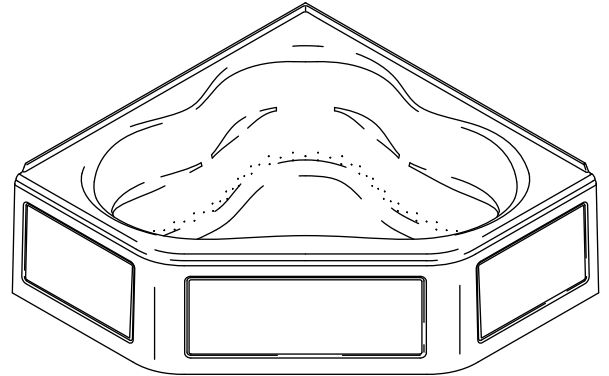

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- UL 1795
- IAPMO IGC 171
- ASTM E162
- ASTM E662

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1160-GLA	Corner bath with airjets – integral apron, integral flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>			
K-11677	Trip lever drain – through-the-floor installation	<input type="checkbox"/> CP	
<b>Optional Accessories</b>			
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

### Product Specification

The acrylic corner bath with airjets shall be 60-9/16" (1538 mm) in length, 60-9/16" (1538 mm) in width, and 21" (533 mm) in height. Product shall be for corner installation. Product shall feature an integral flange and integral apron with removable panel for front access. Product shall have a blower motor with 300 W heater and an electronic user control. Blower motor shall have a grounding-type plug-in cord. Product shall feature 120 airjets and molded lumbar supports and armrests. Bath with airjets shall be Kohler Model K-1160-GLA-\_\_\_\_\_.

# TERCET®

## Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	52" (1321 mm) x 38-3/4" (984 mm)
Basin area, top	61" (1549 mm) x 46-1/4" (1175 mm)
Weight	151 lbs (68.5 kg)
To overflow:	
Water depth	15" (381 mm)
Capacity	96 gal (363.6 L)
* Approximate measurements for comparison only.	

Blower motor	Heater	V	Hz	A
	300 W	120	60	5


## Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor	120 V, 5 A, 60 Hz
Locate the outlet onto the wooden stud provided as illustrated below.	

## Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 40 lbs/square foot (193 kg/square meter) loading.

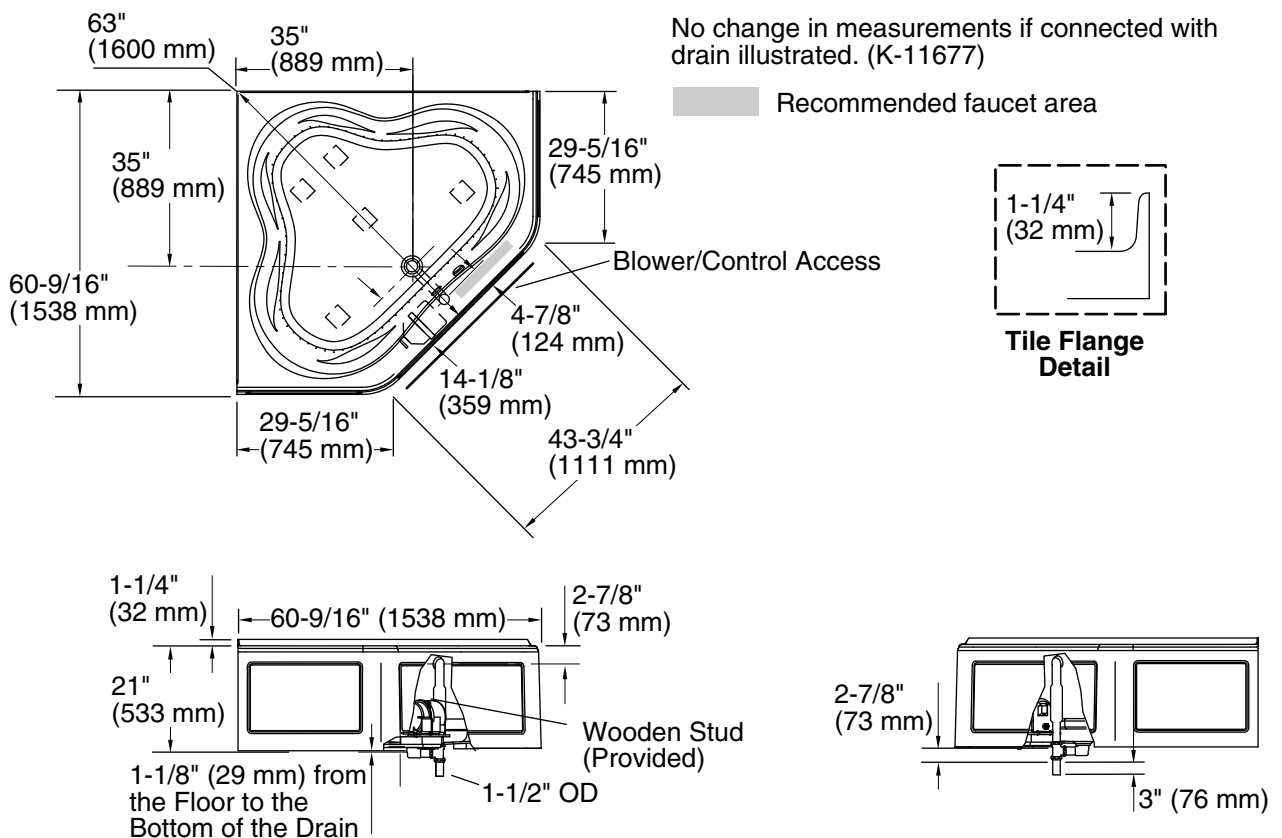

## Product Diagram