

Product Information

Applicable products:				
Bubblemassage bath			K-1162-G	
Fixture*:				
Bathing well:				
Basin area, bottom	43" (109.2 cm) x 21-9/16" (54.8 cm)			
Basin area, top	53-1/2" (135.9 cm) x 32-1/8" (81.6 cm)			
Weight	110 lbs (50 kg)			
To overflow:				
Water depth	15" (38.1 cm)			
Capacity	57 gal (215.9 L)			
* Approximate measurements for comparison only.				
Included components:				
Cut-out template		1042556-7		
Blower motor	Heater	V	Hz	A
	300 W	120	60	5
Minimum access panel blower motor:				
20" (50.8 cm) W x 15" (38.1 cm) H			required	

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 5 A, 60 Hz


Locate the outlet behind the bath and within 24" (61 cm) of the blower.

Installation Notes

Install this product according to the installation guide.


Floor support under bath must provide for a minimum of 35 lbs/square foot (171 kg/square meter) loading.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

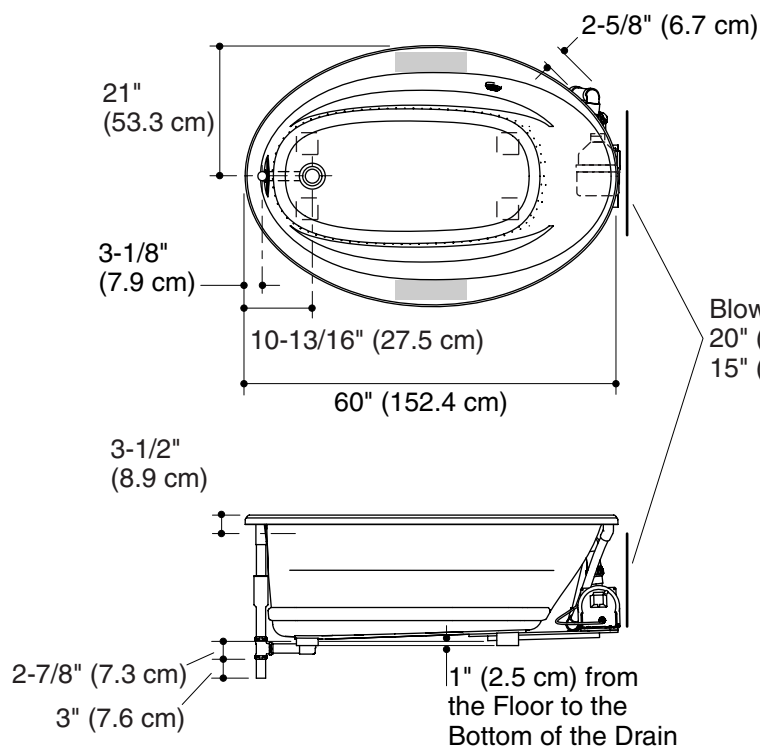

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Recommended faucet area



Drop-In Rim Detail

Blower/Control Access
 20" (50.8 cm) W x
 15" (38.1 cm) H Min

