

Features

- Metal construction
- Reversible quarter-turn washerless ceramic disc valves
- For 4" (10.2 cm) centers
- 6" (15.2 cm) threaded swing spout reach
- Available with sculptured acrylic, blade or lever handles
- Lower flow aerator options available (refer to the Kohler Price Book)
- 2.2 gallons (8.3 L) per minute maximum flow rate


Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

• ASME A112.18.1/CSA B125.1

Specified Model

- NSF 61
- All applicable US Federal and State material regulations



Colors/Finishes

CP: Polished Chrome

Model	Description	Sculptured Acrylic	Blade ADA	Lever ADA
K-15271	Laundry sink faucet (shown)	□ CP		
K-15271-B	Laundry sink faucet		□ CP	
K-15271-4	Laundry sink faucet			□ CP

Product Specification


The two-handle centerset laundry sink faucet shall be of metal construction. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall feature reversible quarter-turn washerless ceramic disc valves and a 6'' (15.2 cm) threaded swing spout reach. Product shall be for 4'' (10.2 cm) centers. Product shall be available with sculptured acrylic, blade, or lever handles. Faucet shall be Kohler Model K-15271-____-CP.

CORALAIS_®

CORALAIS®

Installation Notes

Install this product according to the installation guide.

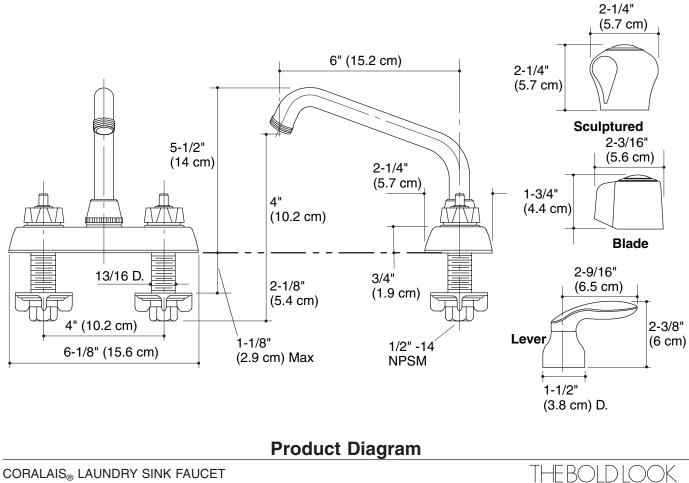

CORALAIS_® LAUNDRY SINK FAUCET Page 2 of 2 115378-4-**CD**