

KOHLER® Roughing-In

K-1976, K-1977, K-1978, K-1979

TRESHAM™

SHOWER RECEPTOR WITH INTEGRAL SEAT


Product Information

Applicable product:	
Integral seat at left and drain hole at right	K-1976
Integral seat at right and drain hole at left	K-1977
Integral seat at left and drain hole at right	K-1978
Integral seat at right and drain hole at left	K-1979
Fixture:	
Weight	72 lbs (32.7 kg) [K-1976, K-1977] 79.5 lbs (36.1 kg) [K-1978, K-1979]
Configuration	one-piece
Drain hole	3-3/8" (8.6 cm) D.
Required accessories:	
Shower drain	K-9132
Recommended accessories:	
7 kW steam generator (for regular install with a standard 8' (2.4 m) ceiling or less*) [K-1976, K-1977]	K-1657
9 kW steam generator (for regular install with a standard 8' (2.4 m) ceiling or less*) [K-1978, K-1979]	K-1658

7 kW Fast-Response steam generator (for install with DTV II with a standard 8' (2.4 m) ceiling or less*) [K-1976, K-1977]	K-1708
9 kW Fast-Response steam generator (for install with DTV II with a standard 8' (2.4 m) ceiling or less*) [K-1978, K-1979]	K-1733
*If the ceiling is higher than 8' (2.4 m), we recommend going up one generator size per foot (30 cm) above 8' (2.4 m).	

Installation Notes

Install this product according to the installation guide.
 Floor leveling compound may be required to level the fixture.
 Shimming may be required between the stud frame and the fixture.
 The stud opening tolerance is +1/4" (6 mm), -0" (0 mm).
 When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.
 Fixture conforms to ANSI standard Z124.1.2. All dimensions are nominal.

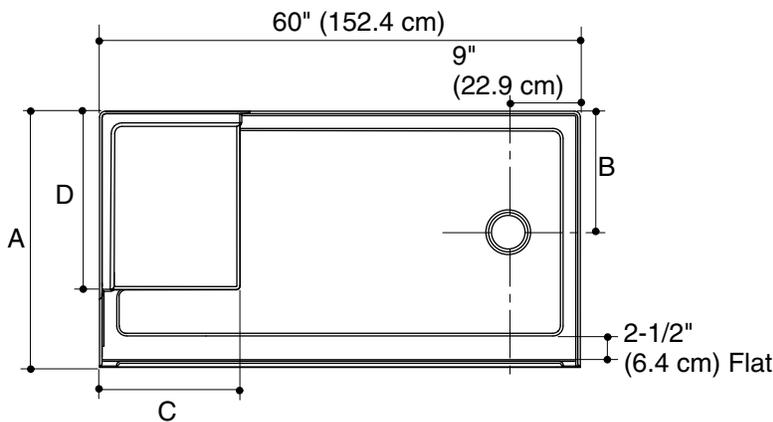

	K-1976 K-1977	K-1978 K-1979
A	32" (81.3 cm)	36" (91.4 cm)
B	15-1/8" (38.4 cm)	17-1/8" (43.5 cm)
C	17-3/16" (43.7 cm)	17-7/16" (44.3 cm)
D	21-15/16" (55.7 cm)	26-1/2" (67.3 cm)

