


**KITCHEN SINK FAUCET
K-16109**

ADA

Features

- Brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- Available with scroll or traditional handle(s)
- Handspray
- Flexible connections for easy installation
- 2.2 gpm (8.3 lpm) flow rate
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Handle(s) are ADA compliant
- For 8" (20.3 cm) centers
- 9-3/16" (23.3 cm) swing spout

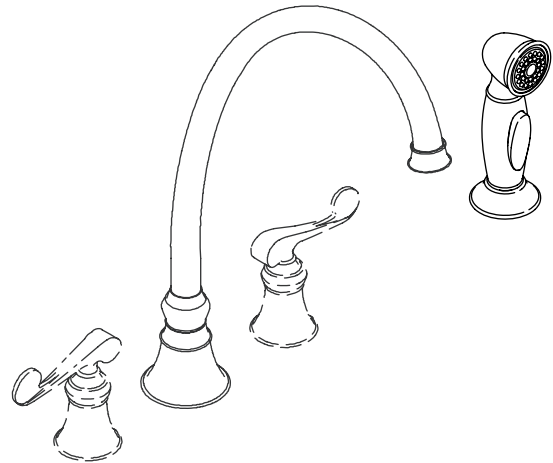

Codes/Standards Applicable





Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- ADA

Colors/Finishes

- CP: Polished Chrome
- BN: Brushed Nickel
- BX: Vibrant® Brazen Bronze
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description		<input type="checkbox"/> CP	<input type="checkbox"/> BN		<input type="checkbox"/> Other ____
K-16109-4	Faucet with scroll handles and accent handspray (shown)	 ADA	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
K-16109-4-BX	Faucet with scroll handles and classic handspray				<input type="checkbox"/> BX	
K-16109-4A	Faucet with traditional handles and accent handspray	 ADA	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
K-16109-4A-BX	Faucet with traditional handles and classic handspray				<input type="checkbox"/> BX	

Product Specification

The two-handle kitchen sink faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall feature quarter-turn washerless ceramic disc valves, assuring positive handle stop positioning. Faucet shall have a flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available. Faucet shall feature 8" (20.3 cm) centers, 9-3/16" (23.3 cm) swing spout, handspray, and flexible connections for easy installation. Faucet shall feature ADA compliant traditional or scroll handles. Faucet shall be Kohler Model K-16109-____-____ or K-16109-____-BX.

REVIVAL®

Installation Notes

Install this product according to the installation guide.

