


Features

- Acrylic
- Drop-in or undermount installation
- Molded lumbar support
- 66" (167.6 cm) x 32" (81.3 cm) x 22" (55.9 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- ANSI Z124.1.2
- CSA B45.0
- CSA B45.5
- ASTM E162
- ASTM E662
- UL 1795

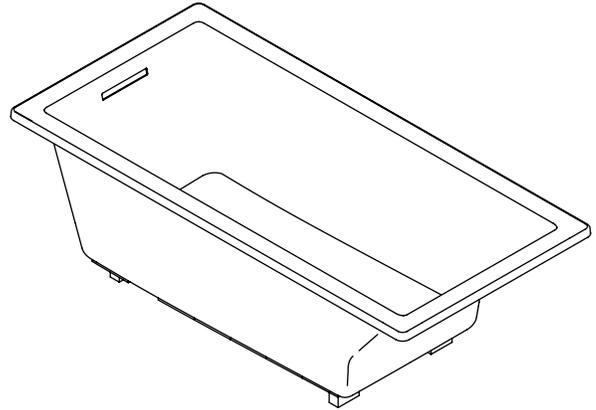

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1821	Bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-7271	Clearflo slotted overflow brass bath drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-550	Undermount kit		<input type="checkbox"/> NA	
K-1491	Pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____

Product Specification

The acrylic bath shall be 66" (167.6 cm) in height, 32" (81.3 cm) in width, and 22" (55.9 cm) in depth. Bath shall be for drop-in or undermount installation. Bath shall have molded lumbar support. Bath shall be Kohler Model K-1821-_____.

UNDERScore®

Technical Information


Fixture*:	
Bathing well:	
Basin area, bottom	44-1/2" (113 cm) x 22-5/16" (56.7 cm)
Basin area, top	59-5/8" (151.4 cm) x 25-1/2" (64.8 cm)
Weight	86 lbs (39 kg)
To overflow:	
Water depth	18" (45.7 cm)
Capacity	85.8 gal (325 L)
* Approximate measurements for comparison only.	
Drop-in cut-out	64-1/2" (163.8 cm) x 30-1/2" (77.5 cm)

Installation Notes



Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 50 lbs/square foot (242 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

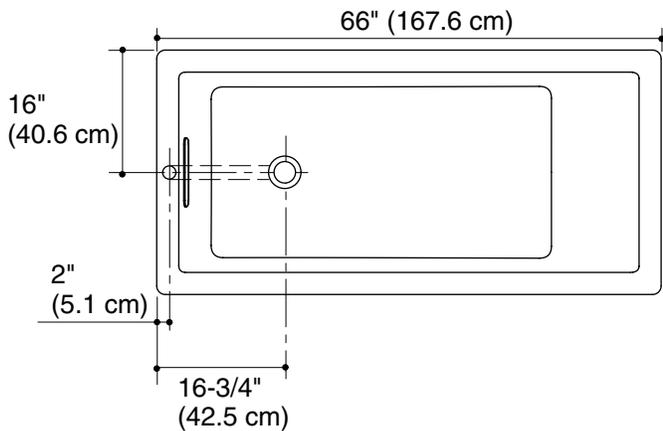

No change in measurement if connected with drain illustrated. (K-7272)

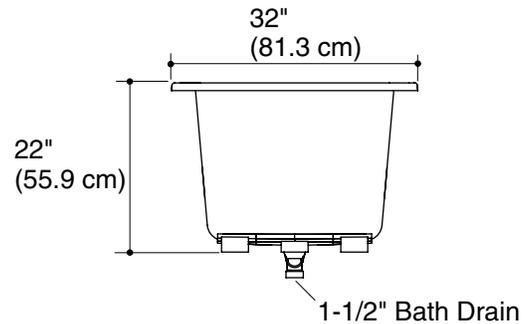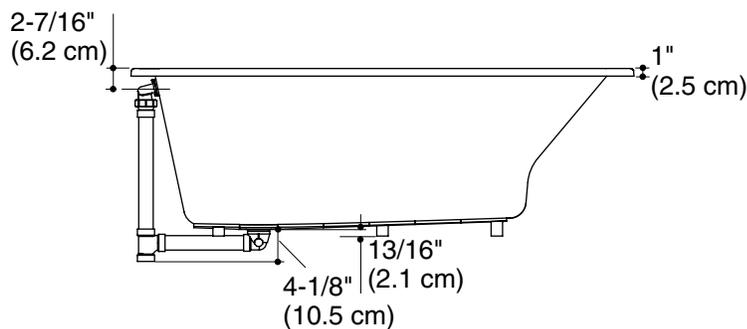

Product Diagram