

### Features

- Vitreous china
- Round-front
- 12" (30.5 cm) rough-in
- 1.6 gpf (6 lpf) or 1.28 gpf (4.8 lpf)
- 2-1/8" (5.4 cm) glazed trapway
- Class Five™ flushing system
- Less seat and supply
- With Insuliner® insulated tank lining
- With classic design (K-3532) or stately design (K-3533)
- 10-3/4" (27.3 cm) x 8-1/2" (21.6 cm) water area
- 28-3/8" (72.1 cm) x 17-13/16" (45.2 cm) x 31-1/2" (80 cm) (K-3532)
- 28-3/8" (72.1 cm) x 18-7/8" (47.9 cm) x 31-1/8" (79.1 cm) (K-3533)

### COMFORT HEIGHT™ TOILETS

# K-3532

ALSO K-3533



K-3532



K-3533

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2
- IAPMO/cUPC
- Energy Policy Act of 1992
- CSA B45

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-3532	Round-front toilet with Insuliner® and classic design	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-3533	Round-front toilet with Insuliner® and stately design	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories			
K-4639	Cachet™ Quite-Close™ round, closed-front toilet seat with cover	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4662	Lustra™ round, closed-front toilet seat with cover	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-7637	3/8" NPT angle supply with stop	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other _____

### Product Specification

The round-front toilet shall be 12" (30.5 cm) rough-in. The toilet shall be made of vitreous china. The toilet shall be classic design (K-3532) or stately design (K-3533). The toilet shall be at comfort height with a 16-1/2" (41.9 cm) high bowl. The toilet shall be rated at 1.6 gallons (6 L) per flush or 1.28 gallons (4.8 L) per flush, with Class Five™ flushing system. The toilet shall have 2" (5.1 cm) glazed trapway, and 10-3/4" (27.3 cm) x 8-1/2" (21.6 cm) water area. The toilet shall be less seat and supply. The toilet shall have Insuliner® insulated tank lining. K-3532 shall be 28-3/8" (72.1 cm) x 17-13/16" (45.2 cm) x 31-1/2" (80 cm). K-3533 shall be 28-3/8" (72.1 cm) x 18-7/8" (47.9 cm) x 31-1/8" (79.1 cm). The toilet shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_.

# MEMOIRS® CLASS FIVE™


## Technical Information

Fixture:	
Configuration	Two-piece, round-front
Water per flush	1.6 gal (6 L) or 1.28 gal (4.8 L)
Passageway	2-1/8" (5.4 cm)
Water area	10-3/4" (27.3 cm) x 8-1/2" (21.6 cm)
Water depth from rim	6-1/8" (15.6 cm)
Seat post hole centers	5-1/2" (14 cm)

Included components:	
Bowl	K-4289
Tank with classic design <b>OR</b>	K-4485
Tank with stately design	K-4473
Tank cover with classic design <b>OR</b>	1052859
Tank cover with stately design	1052860
Trip lever	K-9439

## Installation Notes

Install this product according to the installation guide.

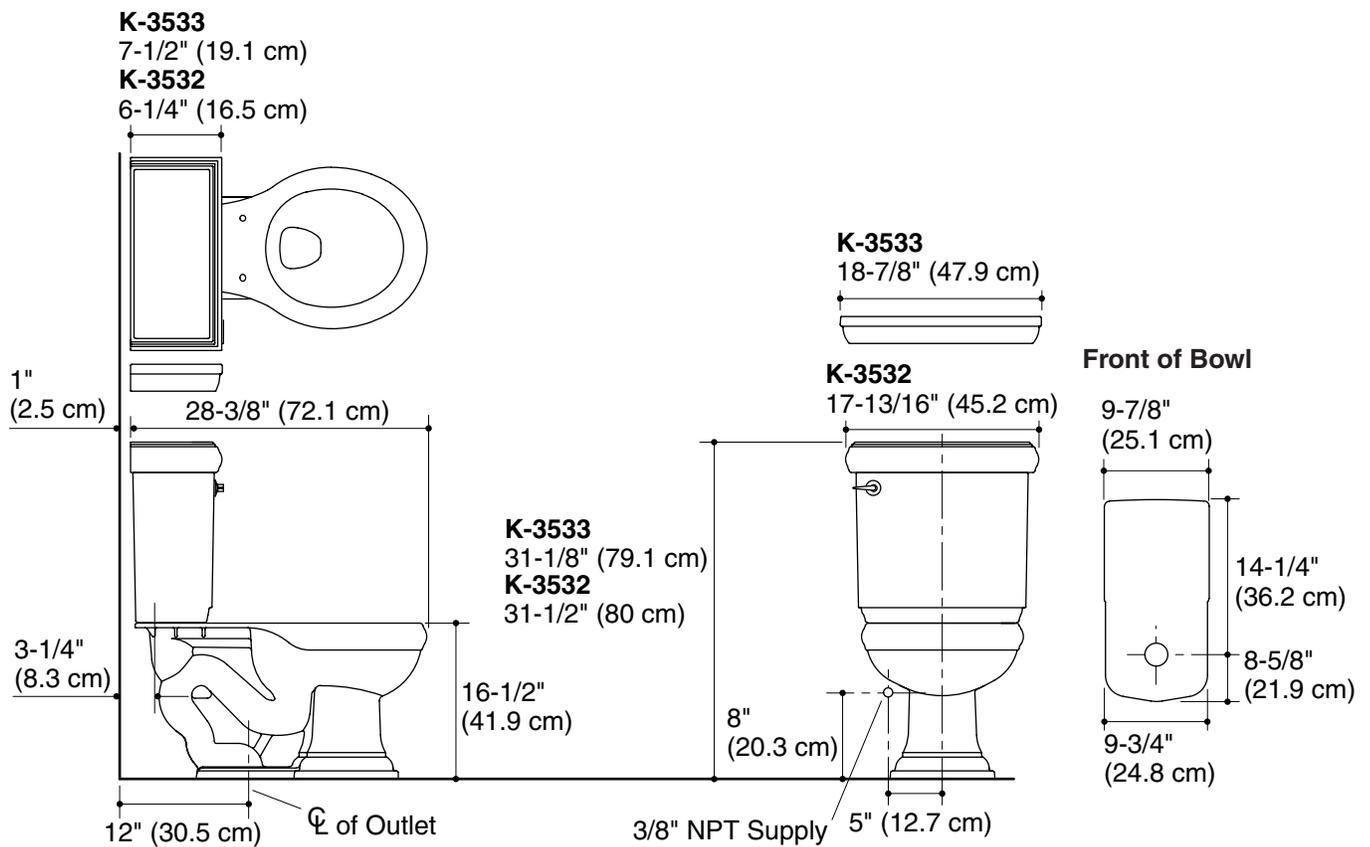

## Product Diagram