


Features

- Vitreous china
- Wall-mount
- 1-1/2" rear spud
- Siphon jet
- 1.28 gpf (4.8 lpf)
- 20% water savings over standard 1.6 (6 lpf) model
- ADA compliant when installed following installation notes
- With bedpan lugs (-L)
- Elongated bowl
- 10-1/2" (26.7 cm) x 9" (22.9 cm) water area
- 26-1/2" (67.3 cm) x 16-1/2" (41.9 cm) x 13-1/4" (33.7 cm)

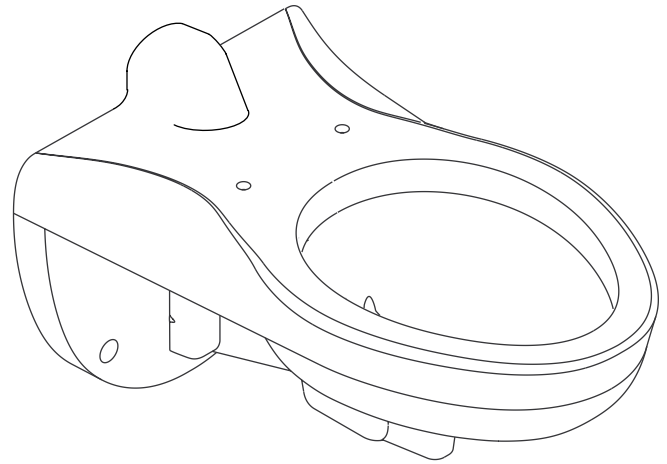

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- Energy Policy Act of 1992
- ASME A112.19.2/CSA B45.1

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-4323	Toilet	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4323-L	Toilet – with bedpan lugs	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories			
K-4731-C	Stronghold™ open-front elongated seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4731-SC	Stronghold open-front elongated seat with integrated handle	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4731-GC	Stronghold Quiet Close™ open-front elongated seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Product Specification

The elongated bowl shall be made of vitreous china. Product shall be 26-1/2" (67.3 cm) in length, 16-1/2" (41.9 cm) in width, and 13-1/4" (33.7 cm) in height with a 10-1/2" (26.7 cm) x 9" (22.9 cm) water area. Product shall feature a 1-1/2" rear spud and siphon jet. Product shall be for wall-mount installation. Product shall feature 1.28 gpf (4.85 lpf) which results in a 20% water savings over standard 1.6 (6 lpf) models. Product shall be ADA compliant when installed following installation notes. Product shall be available with bedpan lugs (-L). Bowl shall be Kohler Model K-4323-____ or K-4323-L-____

Technical Information


Fixture:	
Configuration	rear spud, elongated
Water per flush	1.28 gallons (4.85 L)*
Spud size	1-1/2"
Passageway	2-1/8" (5.4 cm)
Water area	10-1/2" (26.7 cm) x 9" (22.9 cm)
Water depth from rim	5-1/4" (13.3 cm)
Seat post hole centers	5-1/2" (14 cm)
* Designed to flush with 1.28 gallons (4.85 L) of water when installed with a 1.28 gallon (4.85 L) flush valve. Refer to manufacturer and local codes for flush valve requirements.	
Included components:	
Spud	18357

Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. In addition, the installation of an elongated open-front seat is required.

The Plumbing Codes require open-front elongated toilet seats on public use toilets.

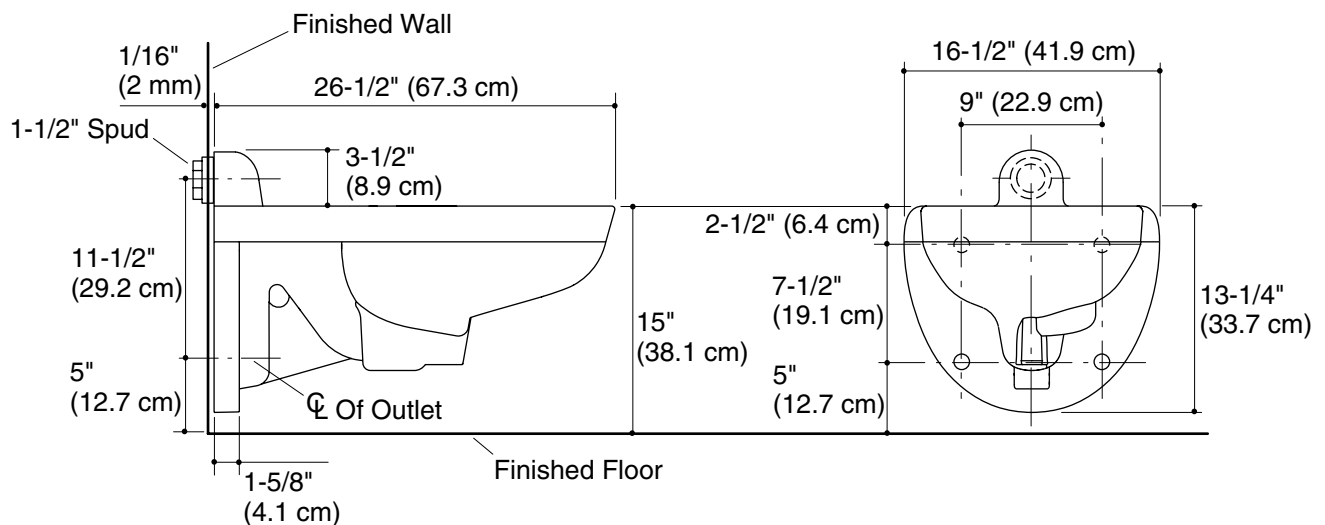

Product Diagram