


## Features

- Metal construction
- 17-gauge brass pipe
- 30" (762 mm) or 45" (1143 mm) length external cable
- Above- or through-the-floor installation offers installation flexibility
- Includes a tee, drain ell, and overflow ell with attached 1-1/2" OD pipe
- Flexible overflow joint conforms to various bath angles
- Rotary or push handle controls pop-up drain stopper (sold separately)
- No internal linkages to minimize the potential for clogging
- Vibrant PVD finishes available

## CABLE BATH DRAIN K-37380 ALSO K-37382

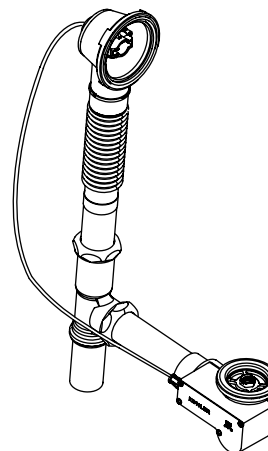

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASME A112.18.2/CSA B125.2

## Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

## Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

## Specified Model:

Model	Description	Colors/Finishes	
K-37380	Cable bath drain – 30" (762 mm), brass	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-37382	Cable bath drain – 45" (1143 mm), brass	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Required Accessories			
K-T37391	Cable bath drain trim – Basic Rotary <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37392	Cable bath drain trim – Contemporary Rotary <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37393	Cable bath drain trim – Traditional Rotary <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37394	Cable bath drain trim – Victorian Rotary <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37395	Cable bath drain trim – Contemporary Push <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37396	Cable bath drain trim – Traditional Push <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37397	Cable bath drain trim – Victorian Push	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

## PRODUCT SPECIFICATION

The cable bath drain shall be of metal construction. Product shall have a 17-gauge brass pipe. Product shall include a tee, drain ell, and overflow ell with attached 1-1/2" OD pipe. Product shall feature 30" (762 mm) or 45" (1143 mm) length external cable, rotary or push handle that controls pop-up drain stopper (sold separately), and flexible overflow joint that will conform to various bath angles. Product shall have no internal linkages to minimize the potential for clogging. Cable drain shall have above- or through-the-floor installation that offers installation flexibility. Cable drain is available with vibrant PVD finishes. Product shall be Kohler Model K-\_\_\_\_-\_\_\_\_\_.


# PUREFLO™

## Installation Notes

Install this product according to the installation guide.

**NOTE:** Use caution when this drain is installed on whirlpools or air baths. The jet action may cause the water to splash when the jets are activated.

The elbow brass pipe subassemblies (noted as L1 and L2 in the Product Diagram) must be cut to correct length.

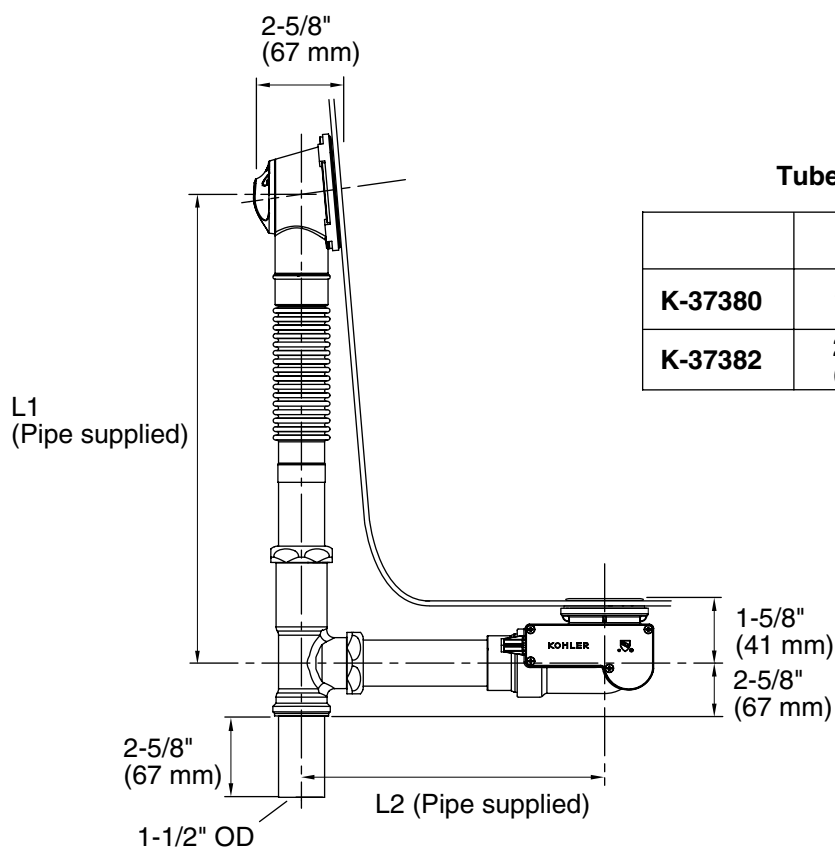

**Tube Length Supplied**

	L1	L2
<b>K-37380</b>	21" (533 mm)	9-1/2" (241 mm)
<b>K-37382</b>	26" (660 mm)	9-1/2" (241 mm)

**Product Diagram**