

Product Information

Applicable Product:	
Comfort Height toilet	K-3754
ADA compliant when installed following installation notes.	ADA

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.6 gal (6 L)
Passageway	2-1/8" (5.4 cm)
Water area	11" (27.9 cm) x 8-3/4" (22.2 cm)
Water depth from rim	6" (15.2 cm)
Seat post hole centers	5-1/2" (14 cm)

K-4306
K-4474
1070414
1075348
1016548
1013092


Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

The Plumbing Codes require open-front elongated toilet seats on public use toilets.

Fixture conforms to ASME Standard A112.19.2/CSA B45.1. All dimensions are nominal.

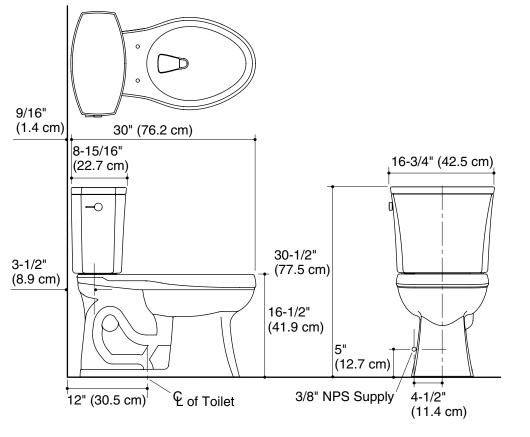

Front of Bowl

