



INSTALLATION

G U I D E

GOOSENECK  
LAVATORY  
FAUCETS

THE BOLD LOOK  
OF **KOHLER**®

## RECOMMENDED TOOLS AND MATERIALS




Plumbers Putty




Thread Sealant



Adjustable Wrench



Screwdriver



Strap Wrench



Hex Wrench

## BEFORE YOU BEGIN


- Shut off the main water supply.
- Observe local plumbing codes.
- If possible, install faucet before installing the sink.
- Inspect the supply tubing for damage. Replace as necessary.
- Kohler Co. reserves the right to make revisions in the design of faucets without notice, as specified in the Price Book.

## 1. FAUCET INSTALLATION

Apply a bead of plumbers putty to the underside of the faucet body.

Insert the faucet body through the lavatory. Make sure the sleeve is towards the back of the lavatory.


Slide the dish washers over the shanks and secure with the locknuts.

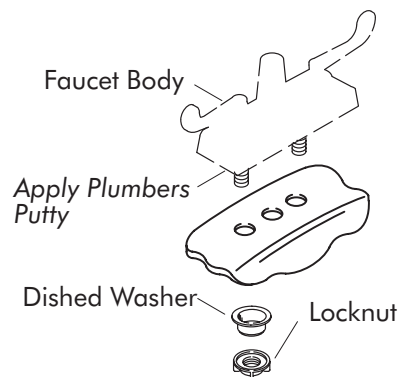

## 2. SPOUT INSTALLATION

Apply thread sealant to the threads of the spout.

Install spout to faucet body. Use a clean strap wrench to tighten if necessary.

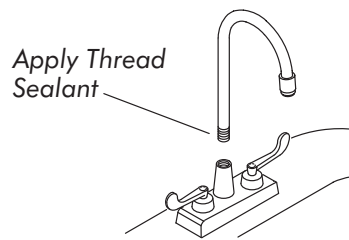

**IF THE SINK IS NOT INSTALLED, INSTALL IT AT THIS TIME. BE SURE TO FOLLOW ALL INSTRUCTIONS PACKED WITH THE SINK.**

## 3. HANDLE INSTALLATION

IF YOUR FAUCET DOES NOT COME WITH PRE-INSTALLED HANDLES:


Install handles at this time according to the instructions packed with the handles.

IF YOUR HANDLES COME PRE-INSTALLED:

Determine which handle cap you would like to install.

If installing the chrome caps, secure the handles with the round head screws and then press the chrome cap into place.

If installing the colored caps, press the caps into the appropriate handles (red in the "HOT" handle and blue in the "COLD" handle), and secure in place with the sockethead screws.

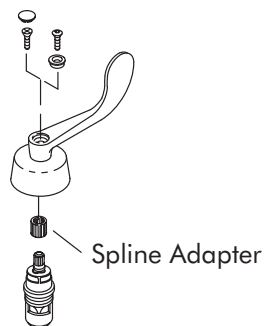


## 4. SUPPLY INSTALLATION

Identify your supply connection type.

Connect the supply tubes to the faucet inlets and supply stops. (Left is hot – right is cold.)

Tighten all connections.

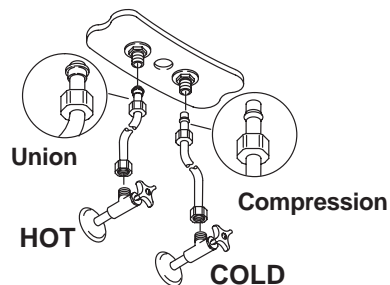

## 5. INSTALLATION CHECKOUT

Install strainer bodies, tailpieces, and P-traps as needed.


Ensure that all connections are tight.

Turn on the main water supply and check for leaks.

Remove the aerator.

Open both hot and cold valves and run water through the spout to remove any debris. Turn the valves off.

Reinstall the aerator.

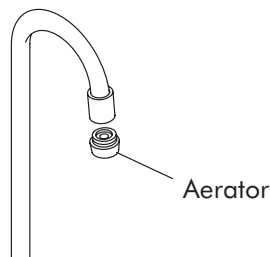

## CALL US FOR HELP

Questions? Problems? First review the installation instructions to ensure correct installation. For additional assistance in the USA, call our Customer Service Department for direct help. You may also contact us at our web site listed below.

**1-800-4-KOHLER**

THE BOLD LOOK  
OF **KOHLER**<sup>®</sup>  
[www.kohlerco.com](http://www.kohlerco.com)