

LAVATORY FAUCET K-7401

Features

- Brass construction
- Quarter-turn washerless ceramic disc valves
- For 4" (10.2 cm) centers
- 4" (10.2 cm) spout reach
- Pop-up drain with lift rod and tailpiece
- Available with standard or vandal-resistant Water-Guard® aerator
- Variety of handle style options
- 1.5 gallons (5.7 L) per minute

ADA

CSA B651



OBC



Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- NSF 14
- EPA WaterSense®



K-7401-K

K-7401-5A

Colors/Finishes

- CP: Polished Chrome
- PB: Vibrant® Polished Brass

Specified Model

Model	Description	Colors/Finishes
K-7401-K	Triton® lavatory base faucet with standard aerator – less handles	☐ CP
K-7401-2A	Triton lavatory complete faucet with standard aerator and standard handles	☐ CP
K-7401-5A	Triton lavatory complete faucet with standard aerator and wristblade lever handles	☐ CP

Required Accessories (Includes Two Handles)					
K-16010-2	Triton® standard handles	☐ CP			
K-16010-3	Triton cross handles		☐ CP		
K-16010-4	Triton lever handles			☐ CP	
K-16010-5	Triton wristblade lever handles				☐ CP

Product Specification


Two-handle centerset lavatory faucet shall be made of brass construction with brass valve bodies. Faucet shall feature quarter-turn washerless ceramic disc valves, assuring positive handle stop positioning. Product shall include 4" (10.2 cm) centers, 4" (10.2 cm) gooseneck spout, standard or vandal-resistant Water-Guard® aerator, and pop-up drain with lift rod and tailpiece. Faucet shall feature a flow rate of 1.5 gallons (5.7 L) per minute. Base faucet shall be Kohler Model K-7401-____-CP with Kohler Model K-16010-____-CP handles **OR** complete faucet shall be Kohler Model K-7401-____-CP.

Optional Accessories		
1160595	Medium Spray 0.35 gpm (1.32 lpm) – Insert only	☐ NA
_____	Additional flow options are available (refer to the Price Book)	☐ NA

Installation Notes

Install this product according to the installation guide.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

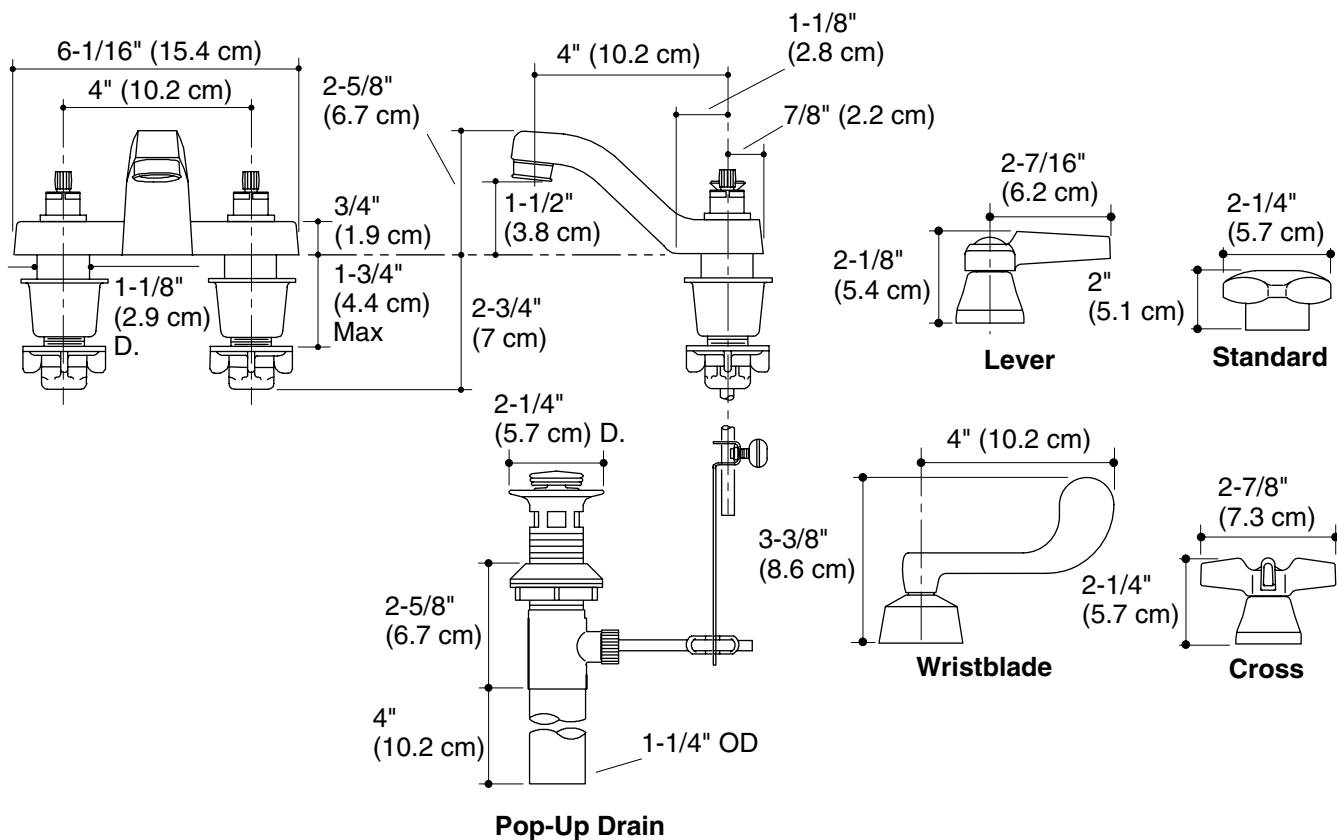

Product Diagram