

TRANSFER VALVE TRIM K-T9540 ALSO K-408-K, K-409-K


FEATURES

- Brass construction
- Bath-mount or deck-mount installation options
- Available with lever or round handle

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:



- ASME/ANSI A112.18.1M

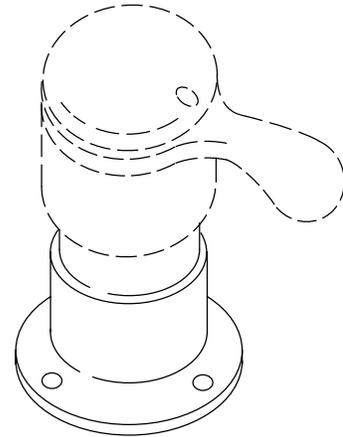

COLORS/FINISHES

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Faucets Price Book for additional finishes

SPECIFIED MODEL: For complete faucet, both faucet trim and transfer valve must be specified.

Model	Description	 <input type="checkbox"/> ADA					
K-T9540-4	With Lever Handle	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____			
K-T9540-7	With Round Handle				<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Required Accessory					 		
K-408-K	Transfer Valve For Bath-Mount Installations				<input type="checkbox"/> NA		
PRODUCT SPECIFICATION:					<input type="checkbox"/> NA		
Two- or three-way transfer valve trim shall be of brass construction. Optional feature shall be bath-mount or deck-mount installation. Transfer valve trim shall be Kohler Model K-T9540-_____-_____- and transfer valve shall be K-_____-K-NA.							


INSTALLATION NOTES

Bath and handshower outlets required for two-way transfer valve.

Bath, handshower, and auxiliary outlets required for three-way transfer valve.

When used as a two-way transfer valve (bath and handshower), the installer must cap the auxiliary outlet. Do not install spouts with flow restrictors or shower units on the bath outlet.

* For installation on cast iron baths, collar should be installed with flange facing downward. Opening in cast iron must be 1-7/8" D. minimum.

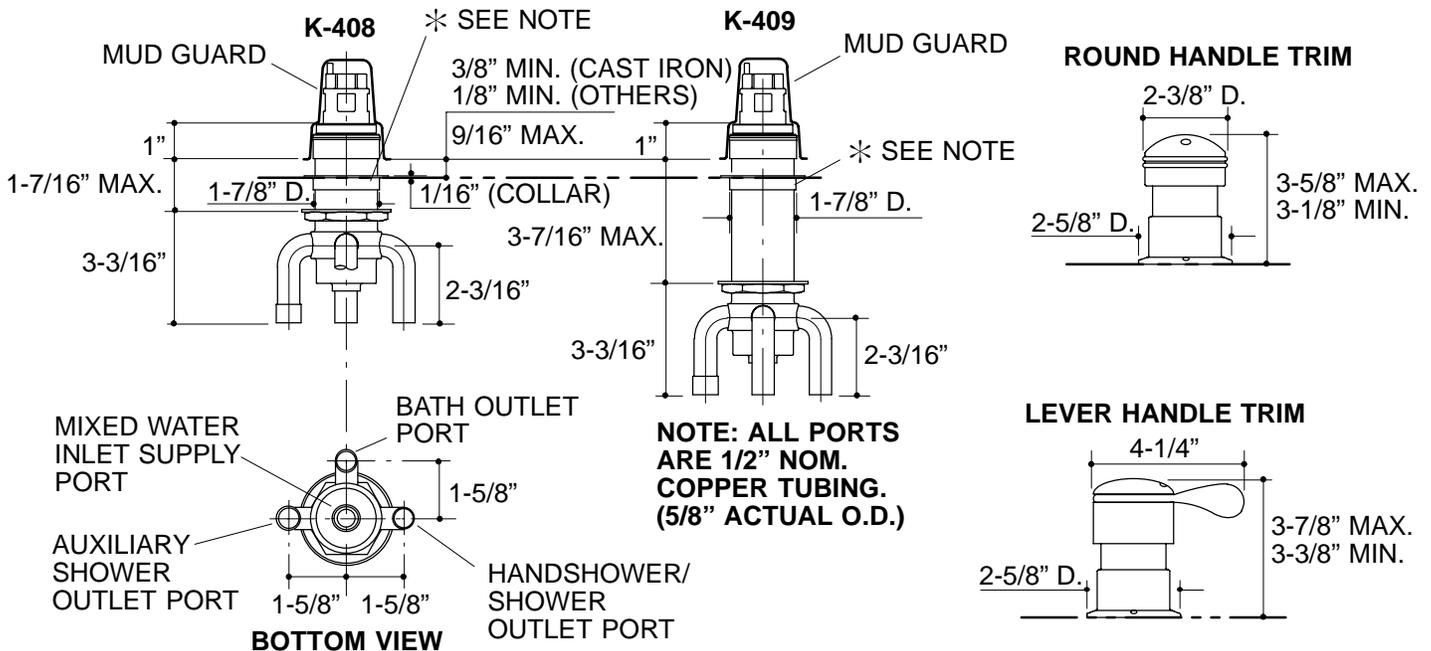

316

PRODUCT DIAGRAM

K-T9540, K-408-K, K-409-K Transfer Valve Trim

Page 2 of 2
 86840-4-AB

THE BOLD LOOK
KOHLER