

Features


- Cast iron with Safeguard® finish
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 8 Flexjets™
- UL listed
- Less all trim
- Custom pump locations
- 66" (167.6 cm) x 36" (91.4 cm) x 24" (61 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1
- ASME A112.19.7M
- UL 1795

5.5' CUSTOM BATH WHIRLPOOL K-856-HE ALSO K-856-HN

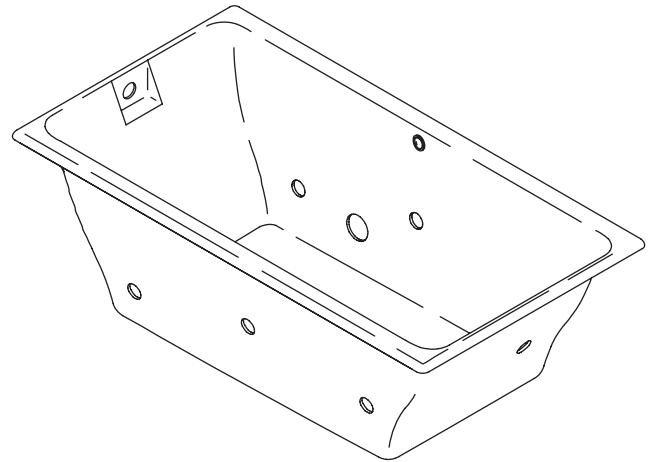

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-856-HE	5.5' bath whirlpool, custom pump location	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-856-HN	5.5' bath whirlpool, custom pump location	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories

K-7147-AF	Clearflo pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories

K-587	Undermount installation kit (template and installation instructions)	<input type="checkbox"/> NA
K-1179	Remote control	<input type="checkbox"/> NA

Product Specification

The bath whirlpool shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 24" (61 cm) in height. Product shall be made of cast iron with Safeguard® finish. Product shall have 8 Flexjets, a variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control. Product shall have custom pump locations. Product shall be UL listed and less all trim. Bath whirlpool shall be Kohler Model K-856-_____-_____.

TEA-FOR-TWO®

Technical Information

Fixture*:	
Bathing well:	
Basin area	45" (114.3 cm) x 25" (63.5 cm)
Top area	58" (147.3 cm) x 29" (73.7 cm)
Weight	510 lbs (231.3 kg)
To overflow:	
Water depth	19-1/2" (27.3 cm)
Capacity (to overflow)	105 gal (397.5 L)
* Approximate measurements for comparison only.	

Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control	208-240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

Floor support under whirlpool must provide for a minimum of 86 lbs/square foot (418 kg/square meter) loading.

A pump/control access panel is required.


For a drop-in installation, the cut-out dimension is 64-1/2" (163.8 cm) x 34-1/2" (87.6 cm).

For an undermount installation, the K-587 template is required.

The hot water supply should be 70% of capacity or greater. Installations will vary.

The pump must be relocated to a custom position at the time of installation. Provide adequate clearance.

No change in measurements if connected with drain illustrated. (K-7147-AF or K-7147M-AF)

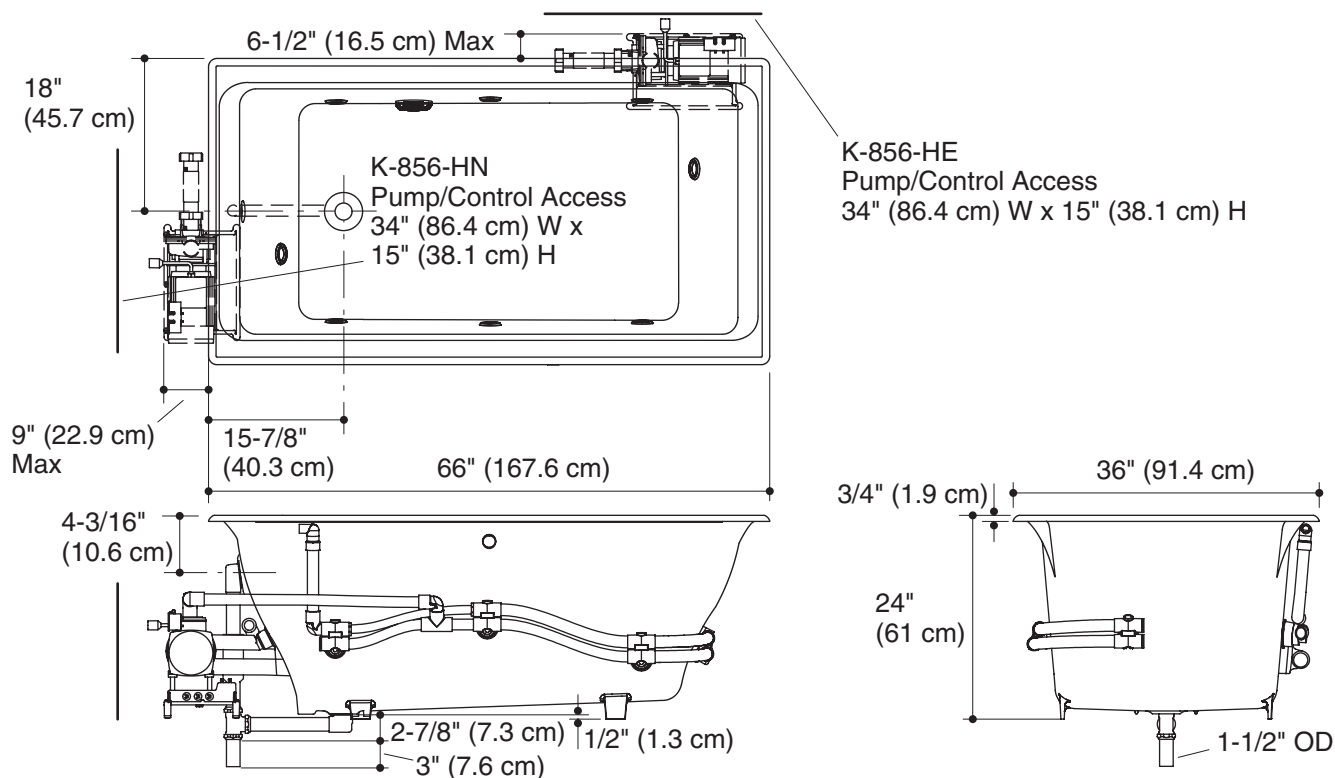

Product Diagram

TEA-FOR-TWO® 5.5' CUSTOM BATH WHIRLPOOL

Page 2 of 2
1019483-4-E

THE BOLD LOOK
OF **KOHLER**®