

#### Features

- Vitreous china.
- Elongated bowl.
- Class Five<sup>®</sup> flushing system.
- One-piece.
- Includes seat and cover.
- Less supply.
- 12" (305 mm) rough-in.
- 1.28 gallons per flush (gpf).
- 2-1/8" (54 mm) glazed trapway.
- Polished chrome trip lever.
- 11" (279 mm) x 7-3/4" (197 mm) water area.
- 28-9/16" (725 mm) x 16-5/16" (414 mm) x 28-7/16" (722 mm).

## **Recommended Accessories**

K-4650 Toilet Seat K-7637 Angle Supply with Stop (single)

## **Optional Accessories**

K-9466-L Left-hand Trip Lever

## Components

Product includes: K-4636 Toilet Seat Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.





## **Codes/Standards**

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

#### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

## Available Color/Finishes

Color tiles intended for reference only.

#### Color Code Description

- O White
- 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar
- ) 33 Mexican Sand™
- K4 Cashmere
- 58 Thunder™ Grey
- 7 Black Black™




Adair™

Comfort Height<sup>®</sup> Class Five<sup>®</sup> Toilet K-3946

# Adair™



Comfort Height® Class Five® Toilet K-3946

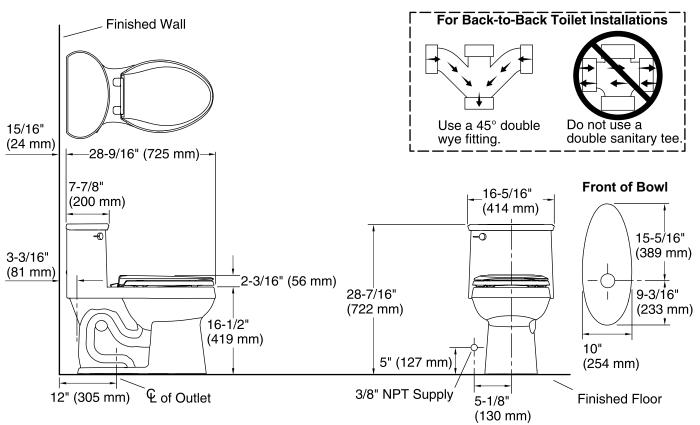

## **Technical Information**

All product dimensions are nominal.	
One-piece	
Elongated front	
AquaPiston	
Quick-Attach <sup>®</sup> , Quiet-Close <sup>™</sup> , Quick-Release <sup>™</sup>	
2-1/8" (54 mm)	
1.28 gpf (4.8 lpf)	
11" x 7-3/4" (279 mm x 197 mm)	
6-1/16" (154 mm)	
12" (305 mm)	
5-1/2" (140 mm)	

#### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

