


# KOHLER® Roughing-In

# K-14037-G ESCALE® FREESTANDING BUBBLEMASSAGE™ BATH

## Product Information

Applicable product:	
6' Freestanding BubbleMassage bath	K-14037-G
Fixture*:	
Bathing well	
Basin area, bottom	46-3/4" (1187 mm) x 21-5/8" (549 mm)
Basin area, top	69-15/16" (1776 mm) x 34-3/8" (873 mm)
Weight	130 lbs (59 kg)
To overflow	
Water depth	16-1/2" (421 mm)
Capacity	71 gal (268.8 L)
* Approximate measurements for comparison only.	
Blower motor:	Heater      V      Hz      A
	300 W      120      60      5
Required accessories:	
Bath drain	K-7219

No change in measurements if connected with drain illustrated. (K-7219)

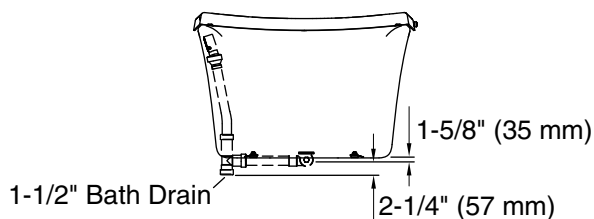

Recommended spouts and spout locations*:	
<b>Area A</b> – floor-mount installation	K-994 <b>OR</b> K-10129
<b>Area B</b> – ceiling-mount installation	K-922 <b>OR</b> K-923
*Refer to shaded areas in product diagram for recommended installation area locations.	

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor:	120 V, 15 A, 60 Hz
Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord.	

## Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 41.5 lbs/square foot (202.8 kg/square meter) loading.

BubbleMassage blower requires remote mounting.

Fixture conforms to CSA B45.5/IAPMO Z124. All dimensions are nominal.

