

INSTALLATION INSTRUCTION For Fixture#1730

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT

MOUNTING THE FIXTURE

1. Shut off the power supply at the fuse box or circuit breaker. Remove the old fixture from ceiling, including the old cross bar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the 2 mounting screw (F) about 1/4" into the pre-drilled holes in the Crossbar (G) spaced the same distance apart as the holes in the fixture. (See Fig.1)
4. Attached the Cross bar (G) to the outlet box by using the 2 Outlet Box Screws (E) from the outlet box. The side of the Crossbar (G) marked "GND" must face out.
5. Put the resin frame (H) onto the steel pan (I) well, then hold them towards the Crossbar (G) and connect the electrical wires as follows (See Fig. 2). Connect the black wire from the fixture to the black house (HOT) wire; connect the white wire from the fixture to the white house (Neutral) wire. Make sure all wire nuts(C) are secured. You may wrap up the connections with electrical tape. If your outlet box has ground wire (Green or Bare Copper) connect fixture's ground wire to it. Otherwise, attach the bare copper fixture wire to the green ground screw on the Cross bar (G). Tuck the wire connections neatly into the ceiling junction box as you holding the fixture assembly toward the ceiling.
6. Finishing mounting the fixture pans (I) by placing it over both mounting screws (F) so that the screws protrude through the keyholes in the steel pan (I). Rotate the pan (I) until the screws are seated in the slots of the keyholes and tighten the screw with a screwdriver.
7. Thread the Nipple (M) into the Coupling (J). The lower nipple length could be adjusted and secured by adjust the location of the hex nut on the center Nipple (M) for install the lower parts of the fixture.
8. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
9. Insert the glass shade (L), Steel Washer (N) over the center nipple (M) in order, then secure with hex nut (O).
10. Insert the bottom cap (P) on to the center nipple (M) and thread the finial(Q) onto the center nipple (M) until snug.

Your installation is now complete. Turn on the power supply of the junction box to test the fixture.

Fig.1


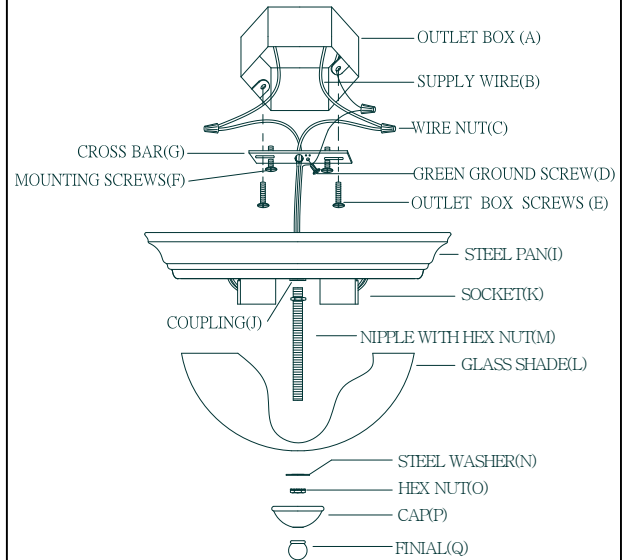


Fig .2



MINI 90C SUPPLY CONDUCTOR

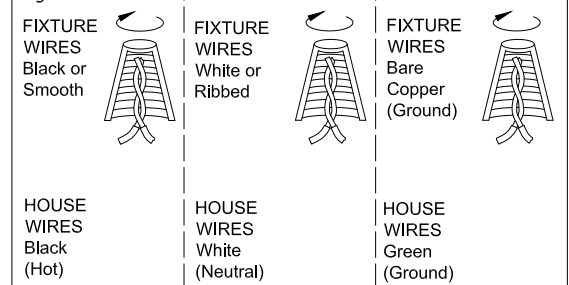