

INSTALLATION INSTRUCTION FOR 1817

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

READ AND SAVE THESE INSTRUCTIONS

ASSEMBLING THE FIXTURE (Fig. 2)

- 1 Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Secure the top part of the arms (N) to the coupling (M) with the machine screws (L).
3. Spread the arms (N) so that the arms (N) are at equal distance from each other.
4. Thread the nut (P) onto the nipple (Q), and thread the nipple (Q) into the coupling (O).
5. Slide the tube (S), cap (T), iron washer (U), plastic washer (V), glass (R), plastic washer (X) and iron washer (W) over the nipple (Q), and secure with the nut (Y).
6. Slide the cap (Z) over the nipple (Q), insert the washer (A1) and secure with the finial (B1).

HANGING THE FIXTURE (Fig. 1)

7. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the mounting bar.
8. Thread the nipple (F) into the screw collar (H) until snug.
9. Thread hex nut (D) onto nipple (F). Place lock washer (C) over end of nipple, thread nipple (F) through mounting bar (A) and continue until tight.
10. Thread the ground screw (E) into the mounting bar, take this mounting bar (A) assembly and mount to ceiling junction box with junction box screws (B). Tighten screws securely with screwdriver.
11. Using proper chain pliers to open one end link of the chain (J) (provided) and connect to the fixture Loop (K). Close the link. (Fig.2)
12. By measuring, determine correct number of links needed for proper hanging height. Using proper chain pliers, disconnect and discard remaining chain.
13. Lace the fixture wires through the chain links. Slip screw collar ring (I) over the chain, then do the same with the canopy (G).
14. Open the other end of the chain (J) (provided) and connect to screw collar (H). Close the link.
15. Feed the fixture wires through the screw collar (H) and nipple (F) and pull until taut.

CONNECTING THE WIRES (Fig. 3)

16. At this point, connect the electrical wires as shown in (Fig. 3) making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connect fixture's ground wire directly to the mounting bar (A) using the green screw provided.
17. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy (G) all the way to the ceiling.
18. Raise the screw collar ring (I) and thread onto screw collar (H) protruding through canopy (G)(Fig.1)
19. Install the light bulbs in accordance with the fixture's specifications.

(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.2

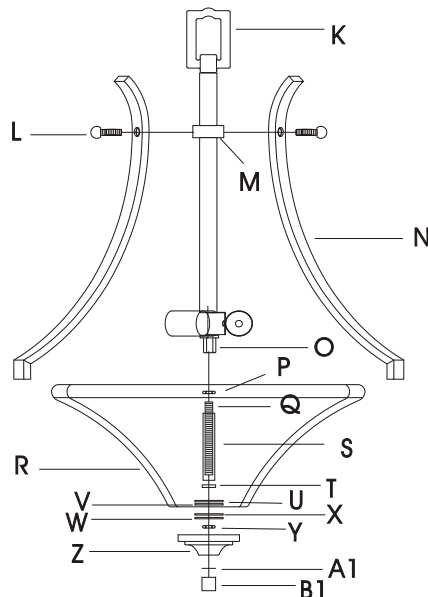


Fig.1


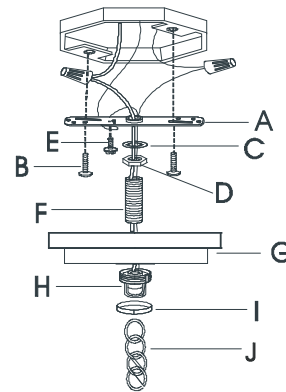


Fig.3



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

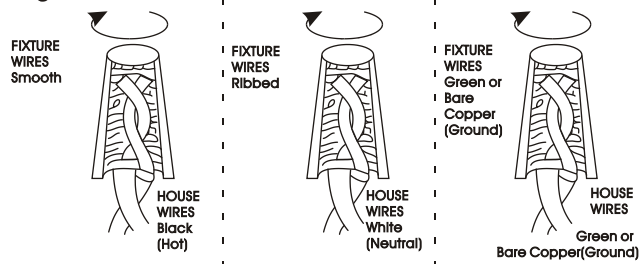