


# INSTALLATION INSTRUCTION For Item #505 For Wall Sconce Fixtures (REV. 13/04/05)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLATION**  
**AVERTISSEMENT ! COUPER LE COURANT AUNIVEAU DES FUSIBLES OU DU DISJONCTEUR**

1. Shut off the power at the circuit breaker box and remove the old fixture including the old strap.
2. Carefully unpack your new fixture and lay out all parts on a clear surface. Be careful not to lose any small parts necessary for the installation.
3. Feed the wires of the fixture through for the central hole of the strap as shown.
4. Pull the wires part way out of the junction box for easier access. Connect the wires from the fixture to the wires from the junction box as shown: White to White; Black to Black; and Green to Green. If there is no green ground wire from the junction box, connect the fixture ground wire (Green or Copper) to the strap with green screw provided. Make sure all wires connectors are screwed on securely and do not easily pull off the wires.
5. Attach the strap to the junction box in the wall with two screws. The side of the strap marked "GND" must face out.
6. Tuck the fixture wires into the mounting channel as you place the light fixture onto the channel. Secure the light fixture to the channel with the side screws.
7. Install the halogen bulb (included) into the holder. NOTE: DO NOT TOUCH THE BULB WITH BARE HANDS. THE OIL FROM YOUR HANDS WILL SHORTEN THE LIFE OF THE BULB! DO NOT EXCEED THE MAXIMUM WATTAGE RATING! NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE
8. Place the spring clips onto the ends of the bulb cover and clip to the bulb holder.
9. Place glass shade into the light fixture with two screws.
10. Your installation is now complete. Return the power to the junction box and test the fixture.

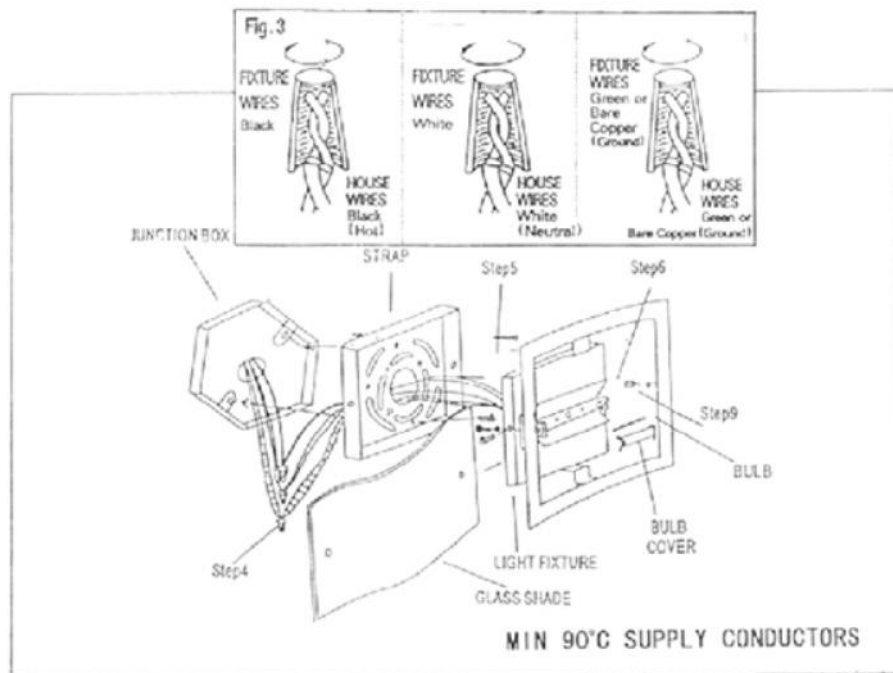

MK-012

