



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- Hydrolock® quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop
- 360° rotating spout provides ability to install handle on either side

## OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Convenient single button actuation provides flexibility to switch from eco-stream or eco-spray mode to fast fill mode

## FLOW

- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi
- Operates in eco-performance mode by default in aerated and spray stream

## CARTRIDGE

- Ceramic disc cartridge
- Non-metallic, non-ferrous and ceramic materials


## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- **ADA**  for lever handle

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installation

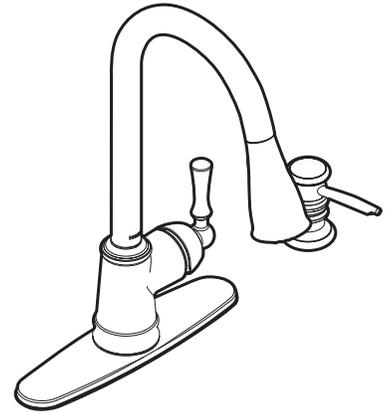

### Lancaster™ Single Handle High Arc Pulldown Kitchen Faucet

Model: CA87020 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA.

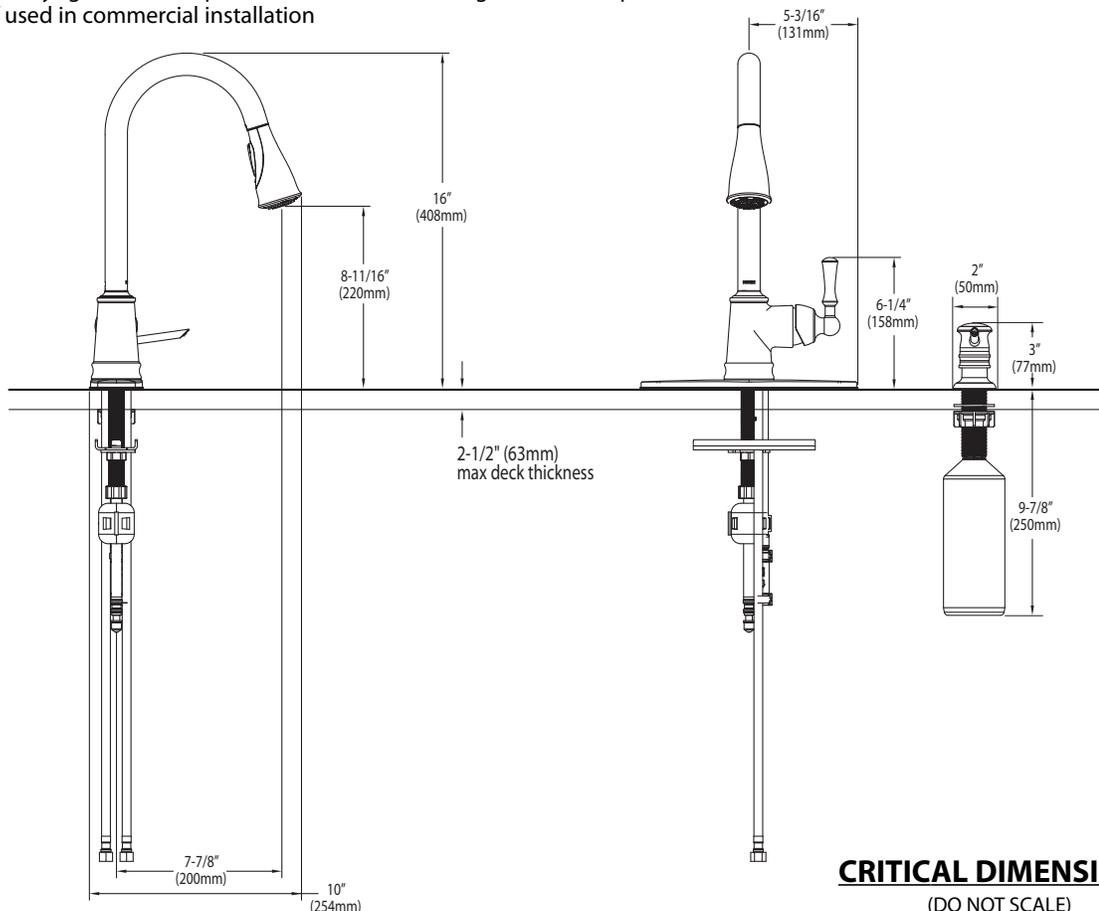

## CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com