

# Specifications

# **DESCRIPTION**

- · Metal construction with various finishes identified by suffix
- Includes metal pop-up type waste assembly
- Flexible supply lines with 3/8" fittings connect directly to supply stops

# **OPERATION**

Pivot action lever style handle

# **FLOW**

• Flow is limited to 1.5 gpm max. (5.7 L/min) at 60 psi

#### CARTRIDGE


1255™ Duralast™ cartridge for Single-Handle Faucets

# **STANDARDS**

- Third party certified to ASME A112.18.1/CSA B125.1, NSF 61/9, ICC A117.1 and all applicable requirements referenced therein
- Third party certified to comply with WaterSense® High Efficiency Bathroom Sink Faucet Specification
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle


# WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



Fina™
Single-Handle Lavatory Faucet
Models: S41707 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE 1-1/4" (32MM) MIN. DIA.

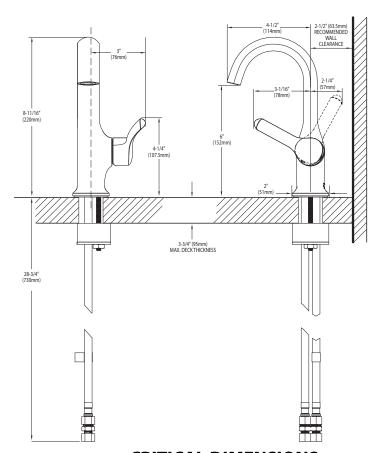



**CRITICAL DIMENSIONS** 

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com