

Fluorescent

**Standard**


**Undercabinet**

White Diffuser

Standard Ballast

Type \_\_\_\_\_  
 -30  
 P7007

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P7007	-30	F20T12	24	1-3/4	5-1/4

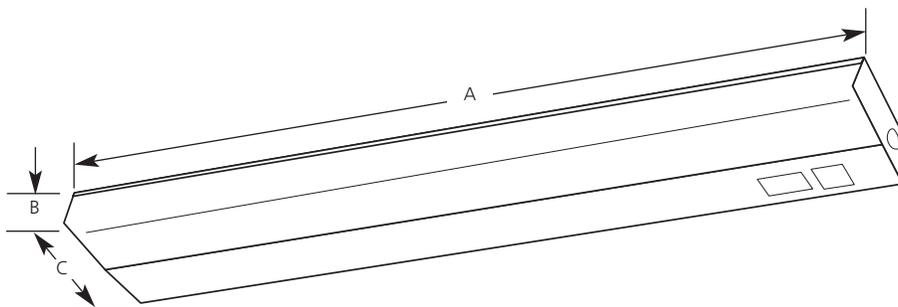

**Specifications:**

General

- Trim, energy efficient fluorescent
- White baked enamel housing
- White acrylic diffuser: 23-15/16" L x 2-5/8" W x 1-9/32" D
- Diffuser snaps securely without the use of tools
- Steel chassis and ballast cover

Electrical

- Standard 120V NPF ballast
- K.O. for rocker switch (P8603-01 accessory) and G.C.O. (P8608-30 accessory)

Labeling

- UL-CUL damp location listed

Mounting

- Flush mounted under cabinets and shelves, over a desk, in a kitchen or work area
- End KO's for continuous row mounting



Fluorescent

**Standard**


**Undercabinet**

White Diffuser

Electronic Ballast

Type \_\_\_\_\_  
 -30EB  
 P7007

Catalog No.	Finish White	Lamping	Dimensions (Inches)		
			A	B	C
P7007	-30EB	F17T8	24	1-3/4	5-1/4

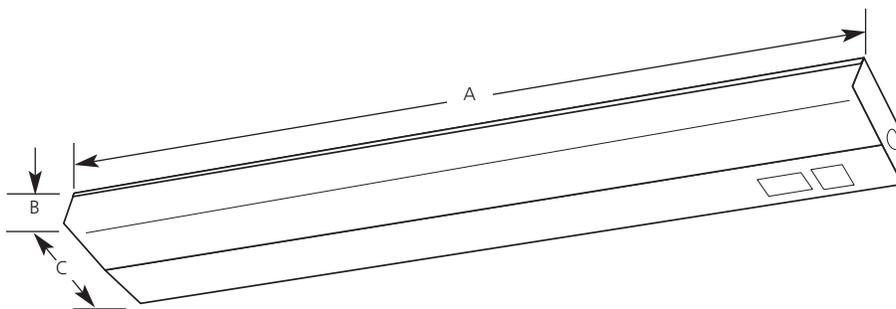

**Specifications:**

General

- Trim, energy efficient fluorescent
- White baked enamel housing
- White acrylic diffuser: 23-15/16" L x 2-5/8" W x 1-9/32" D
- Diffuser snaps securely without the use of tools
- Steel chassis and ballast cover

Mounting

- Flush mounted under cabinets and shelves, over a desk, in a kitchen or work area
- End KO's for continuous row mounting

Electrical

- Electronic 120V HPF ballast
- K.O. for rocker switch (P8603-01 accessory) and G.C.O. (P8608-30 accessory)

Labeling

- UL-CUL damp location listed

\* Non stock

Progress Lighting  
 701 Millennium Blvd.  
 Greenville, South Carolina  
 29607

www.progresslighting.com

Rev. 7/09