




Incandescent  
Halogen

**Illuma-Flex® Mini Pendant**  
**Metal Shade Low Voltage**

**Track**

Type \_\_\_\_\_  
-09  
P6138

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	Brushed Nickel		A	B	C
P6138	-09	12v T4 35w (Incl)	2-5/8	9	72

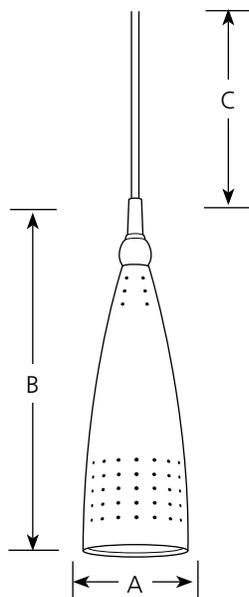

**P6138**

**Specifications:**

General

- Flex track mini-pendant
- Brushed nickel metal perforated shade
- Brushed nickel plated finish
- One 35w T4 lamp included
- Mounts anywhere along Illuma-Flex track sections, or on monopoints
- Includes adapter that allows unit to be mounted to P8516 transformer for Alpha track system also.

Mini Pendant Support

- A small wiring compartment is located just below the fitter to allow adjustment of cord length
- Cord is Teflon coated copper wire with a silicon sleeve that matches the brushed nickel finish

Electrical

- Attachment to 12 volt Illuma-Flex track with supplied track fitter, 120V Alpha-Track using supplied P8777 adaptor and P8516 Alpha-Track transformer or monopoint canopy (requires P8780 or P8794 accessory)
- Lamp has a GY6.35 bi-pin base

Labeling

- CSA-CSA/US listed

Progress Lighting  
701 Millennium Blvd.  
Greenville, South Carolina  
29607

www.progresslighting.com