

SPEAKMAN®

SE-4300 & SE-4320

GRAVITYFLO® PORTABLE EYEWASH

DESCRIPTION

The SE-4300 portable, gravity operated eyewash is the next best thing to a plumbed eyewash. The 20 gallon capacity provides a run time in excess of the ANSI Z358.1 required 15 minutes and offers the best performing spray. A simple pull of an elastomeric strap activates the unit and provides hands free operation. The integral drain allows flushing fluids to be contained avoiding slip hazards.

The SE-4300 is the industry's only portable eyewash that offers an optional side fitting drench hose. The optional SE-4920 drench hose attaches easily to the side discharge port and provides the ability for spot body flushing.

Includes one bottle of SE-4210 water preservative.

SPECIFICATIONS:

Tank: 20 gallon capacity. High density molded polyethelene

Sprays: Molded plastic

Activator: Elastomeric pull strap

Mounting: Shelf or wall mount (bracket included)

Fill Cap: Plastic fill cap with integral tamper prevention

Side Outlet: Integral 1/2" NHT fitting for attachment of SE-4920 drench hose.

Drain: Integral basin drain with 1/2" NHT fitting

Weight: (shipping weight): 18 lbs., **Filled:** 184 lbs.

Compliance: ANSI Z358.1

Signs: Integral Eyewash Sign

ADDITIONAL MODELS

- SE-4320 Gravity-operated eyewash including the side fitting drench hose
- SE-4350 Heated gravity fed eyewash provides protection in unheated spaces
- SE-4380 SE-4300 with cart & fluid collection stand

Available Accessories

SE-4920 Side fitting drench hose with mounting hardware. Retrofittable for existing SE-4300 Gravityflo units.

SE-4210 Water preservative

(Case of 4 - 2 oz. bottles).

Treats 5-21 gallons for up to 180 days.

SE-4240 Fluid collection station

SE-4360 Cart to transport SE-4300 series gravity-fed eyewashes


Unit exceeds the minimum 0.4 gpm

53for 15 minutes as stated by ANSI



Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____

SE-4300

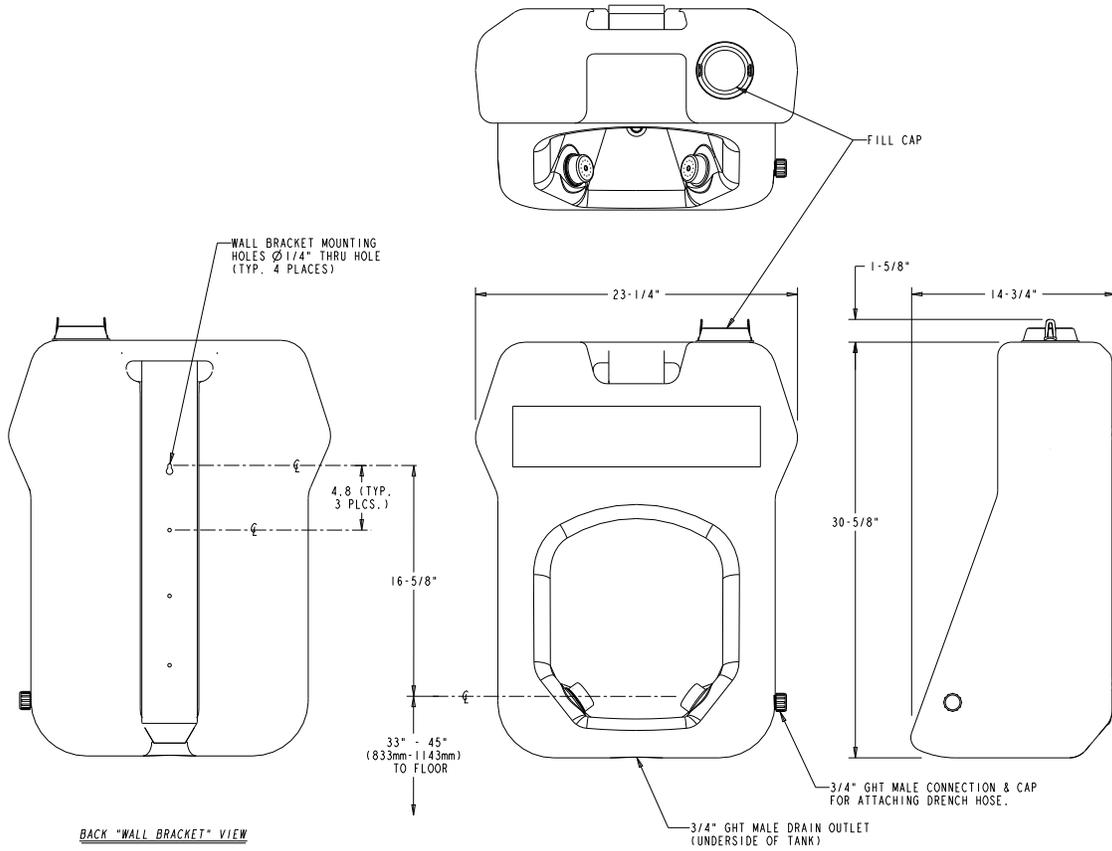

SE-4320

