

SPEAKMAN®

SE-575-SD-237

EYESAVER® EYE/FACE WASH & SAFE-T-ZONE® EMERGENCY SURFACE MOUNTED WALL SHOWER

DESCRIPTION

Barrier-Free wall mounted emergency eye/face wash. Unit supplied with plastic spray heads, with individual flow restrictors. Unit activated by pulling handle down to open position, and is supplied with a cabinet flush with wall to keep corridors free from obstruction. Unit also supplied with wall mounted emergency shower as described below. Emergency deluge shower unit with wall activator. Shower is supplied with a 1” NPTF stay-open full flow ball valve that is activated by pull handle that is mounted on wall. Shower head designed to mount flush with ceiling.

SPECIFICATIONS

Eye/Face Wash:

Spray heads: (2) plastic, non-aerated

Valve: Brass, chrome plated

Inlet: ½" NPT female

Cabinet: 20 Gauge (.036 thk.) 300 Series Stainless Steel with Satin Finish.

Emergency Shower:

Showerhead: Brass, 10” Diameter Flanged Polished Chrome Plated

Cover panel: 20 Gauge (.036 thk.) 300 Series Stainless Steel

Valve: 1” NPT female brass, chrome-plated. full flow stay-open ball valve.

Activator: stainless steel lever with black plastic rotating handle.

Piping: 1” ips steel pipe nipple & unions.

Inlet: 1” NPTF

Performance: 3.9 gpm @ 30 psi (Eyewash)



25 gpm @ 30 psi (Shower)

Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- FLW Flow switch
- ILS In-line Strainer
- SSH Stainless Steel Showerhead
- 30GPM 30 gpm Flow Control

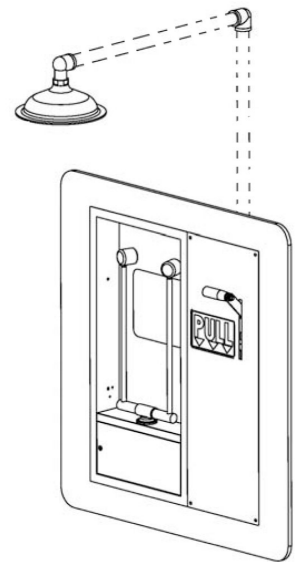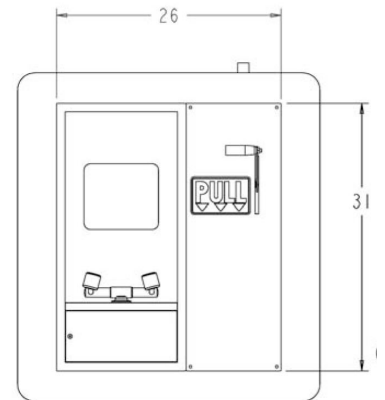

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____