

INSTALLATION INSTRUCTIONS

For Item#8284-A61

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1, 3)

1. Shut off power at the circuit breaker and remove the old fixture including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the nipple into the loop until snug.
4. Thread the other end of the nipple with loop attached into the crossbar until snug.
5. Place the lock washer over the end of the nipple protruding through the crossbar and thread the hex nut onto the nipple until tight.
6. Take the crossbar assembly and mount to the ceiling junction box with junction box screws. Tighten the screws securely with screwdriver.
7. By measuring determine correct number of links needed for proper hanging height.
8. Use a pair of pliers to open one end link of the chain, attach the chain to the fixture's loop, close the link. Slip the Lock collar followed by the canopy over the chain. Open the other end link of the chain and lift the fixture to attach to the ceiling loop, close the chain link.
9. Lace the fixture's wires through the chain links and pull until taut. Feed the fixture wires through the loop and nipple and pull until taut.

CONNECTING THE WIRES (Fig. 2)

10. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.
11. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the Lock collar and thread onto ceiling loop protruding through canopy.
12. Install the light bulb 1*60W A19 (Not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
13. Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

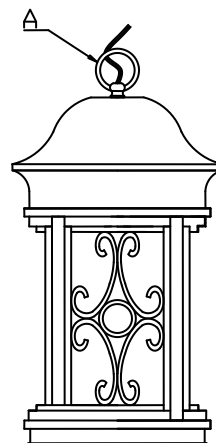


Fig. 2


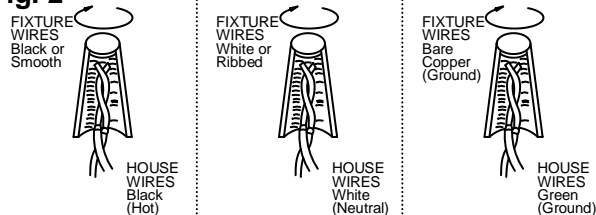


Fig. 3



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

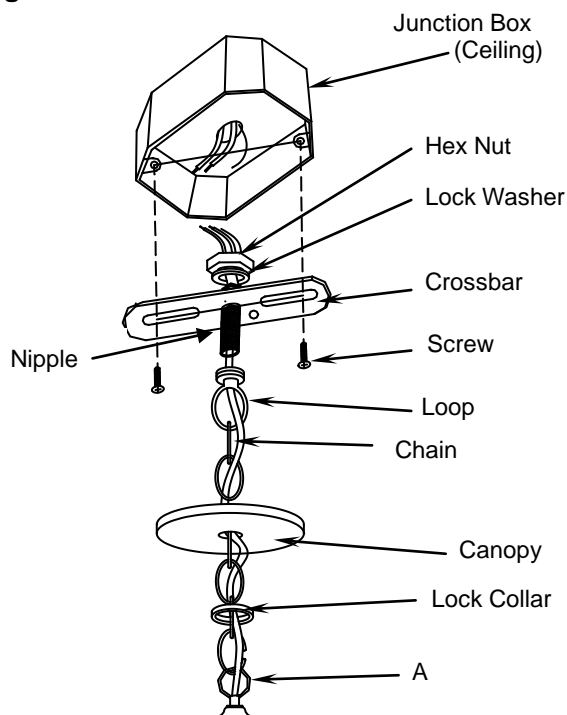

american lighting association

LA-2042E