TOTO

ABA782L/ABA782R

Clayton™ 60" x 32" Tile-in Air Bath™

TOTO® USA, INC. has merged heated air and water to create the ultimate in bathing luxury:

The TOTO® ClaytonTM Tile-in Air BathTM

The TOTO® ClaytonTM Tile-in Air BathTM will provide the bather a soothing, relaxing and refreshing repose uniquely different than any other bath-time experience. The cast-acrylic ClaytonTM Tile-in Air BathTM has smooth lines and a deep bathing well which is accented with a chrome plated solid brass grab bar and 11 individual air jets. The individualized check valve system allows the bather to use soaps, bath oils, salts and other bathing essentials without harming the performance of the air system.



ABA782R - Clayton™ 60" x 32" Tile-in Air Bath™ 3 Flange

- * Molded integral flange options available special order:
- 0 Flange
- 1 Flange
- 2 Flange

- 60" x 32" x 21"
- 3 side molded integral flange tub standard*
- Luxuriously deep Bathing Well
- Cast-acrylic construction provides years of durability
- Slip-resistant surface
- 1 hp Ultra-quiet Blower
- 300 watt Heated Air Injection System
- Final purge/drying cycle to clean each air jet
- Chrome Plated Solid Brass Grab Bar
- Multi functional Keypad
 Normal Mode 5 Intensity Levels For
 Continuous Operation
 Pulsating Mode Alternating between the
 High/Low Intensity levels
 for Massage

Oscillation Mode -Alternating between all 5 Intensity levels for Massage

■ ABA782L

Acrylic bathtub. Slip-resistant surface. Left keypad / left drain / 3 flange

■ ABA782R

Acrylic bathtub. Slip-resistant surface. Right keypad/right drain / 3 flange

Colors:

Standard #01 Cotton

#12 Sedona Beige

Optional See price book for additional colors

Grab Bar Chrome

Jet Trim Chrome

#01 Color Matched

ABA782L/ABA782R

Clayton™ 60" x 32" Tile-in Air Bath™

STYLE

Designed to match our line of residential bathroom products, TOTO's® tubs complete any bathroom suite. Lucite cast acrylic construction provides the ultimate in strength and durability, while a slip-resistant surface enhances safety in the bath.

■ SPECIFICATIONS

Size: 60"L x 32"W

Depth: 21"

Warranty: 5 Year Limited Warranty

on Acrylic Tub

1 Year Limited Warranty on Components and Parts

Material: Lucite Cast Acrylic

Electrical Requirements:

10 AMP; 120V w/GFI

Shipping Weight:

ABA782L/ABA782R


108 lbs.

Shipping Dimensions:

ABA782L/ABA782R 68"L x 40"W x 28"H

Gallons: ABA782L/ABA782R

74 to overflow

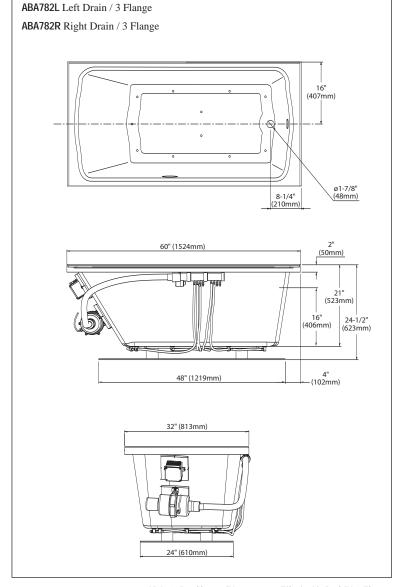

ABA782R - Clayton™ 60" x 32" Tile-in Air Bath™ 3 Flange



Fixture meets ANSI/ASME standard Z124.1, ETL, and C-UPC certified.

These dimensions and specifications are subject to change without notice.

Use TOTO® cut template to assure rough in dimensions.



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com Printed in U.S.A. © TOTO LTD. 10/06 #D