

TOTO® USA, INC. has merged heated air and water to create the ultimate in bathing luxury:

The TOTO® Lloyd™ Air Bath

The TOTO® Lloyd™ Air Bath will provide the bather a soothing, relaxing and refreshing repose uniquely different than any other bath-time experience. The cast-acrylic Lloyd™ Air Bath has smooth lines and a deep bathing well which is accented with a chrome plated solid brass grab bar and 16 individual air jets. The individualized check valve system allows the bather to use soaps, bath oils, salts and other bathing essentials without harming the performance of the air system.



ABA930R - Lloyd™ 6' Air Bathtub
*Decorative trim is optional

- 72" x 42" x 22-3/8"
- Luxuriously deep Bathing Well
- Cast-acrylic construction provides years of durability
- Slip-resistant surface
- 1 hp Ultra-quiet Blower
- 300 watt Heated Air Injection System
- Final purge/drying cycle to clean each air jet
- Chrome Plated Solid Brass Grab Bar

- Multi functional Keypad
 - Normal Mode -**
5 Intensity Levels For Continuous Operation
 - Pulsating Mode -**
Alternating between the High/Low Intensity levels for Massage
 - Oscillation Mode -**
Alternating between all 5 Intensity levels for Massage

■ **ABA930R**
Acrylic bathtub. Slip-resistant surface. Right keypad/ left blower

Colors:

Standard #01 Cotton
#12 Sedona Beige

Grab Bar Chrome

Jet Trim Chrome with color matched air jets

ABA930R

Lloyd™ 6' Air Bathtub

■ STYLE

Designed to match our line of residential bathroom products, TOTO's® tubs complete any bathroom suite. Cast acrylic construction provides the ultimate in strength and durability, while a slip-resistant surface enhances safety in the bath.

■ SPECIFICATIONS

Size: 72"L x 42"W

Depth: 22-3/8"

Bathing Well:

Basin area: 48-3/4" x 26"

Top area: 59" x 29-3/8"

Warranty: 5 Year Limited Warranty on Acrylic Tub

1 Year Limited Warranty on Components and Parts

Material: Cast Acrylic

Electrical Requirements:

15 AMP; 120V w/GFI

Shipping Weight:


ABA930R
145 lbs.

Shipping Dimensions:

ABA930R
76"L x 45"H
x 24"H

Gallons:

ABA930R
94 gal. to overflow
50 min. operational capacity

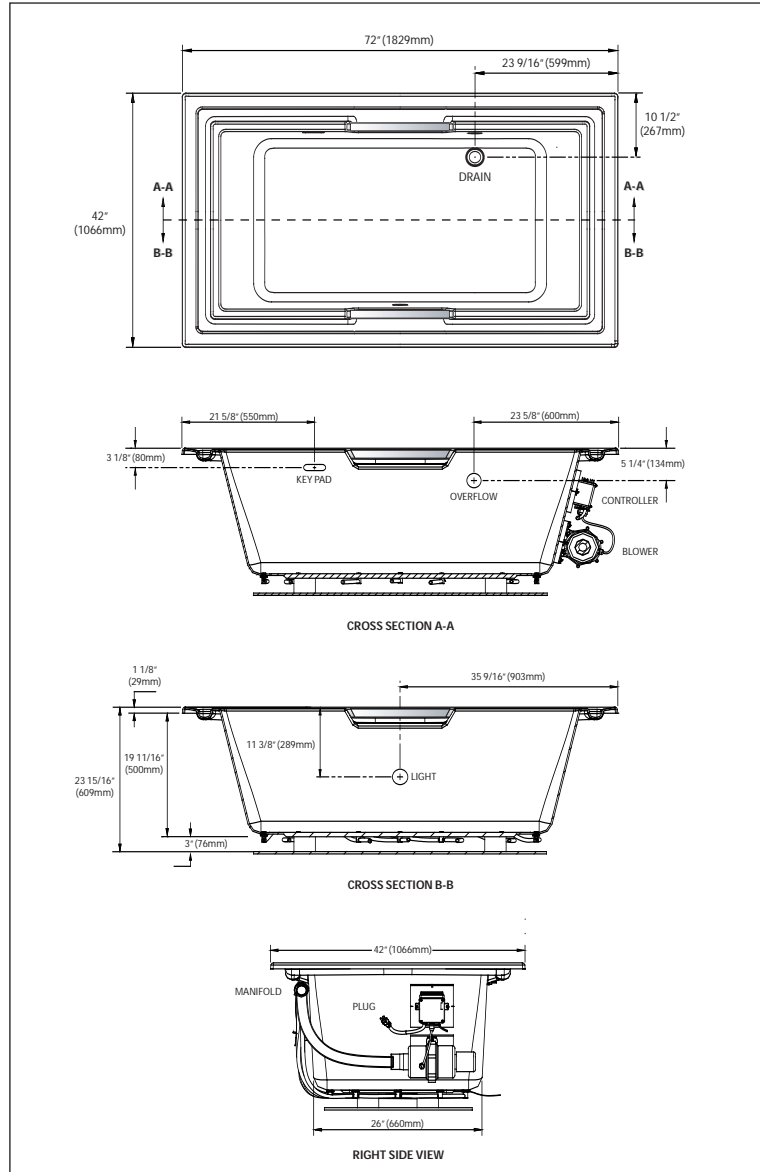

ABA930R - Lloyd™ 6' Air Bathtub



Fixture meets ANSI/ASME standard Z124.1, IAPMO/UPC, and CSA requirements.

These dimensions and specifications are subject to change without notice.

Use TOTO® cut template to assure rough in dimensions.

TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com

Printed in U.S.A. © TOTO® LTD. 6/05 #D50260

Printed on recycled paper

REV 6/05