

# THIS SPACE FOR DESIGNER/ ENGINEER APPROVAL

Job/Customer \_\_\_\_\_ Date \_\_\_\_\_ Contractor \_\_\_\_\_

Model Specified \_\_\_\_\_ Qty \_\_\_\_\_ Approved By \_\_\_\_\_

Designer/Engineer \_\_\_\_\_ Date \_\_\_\_\_ Contractor's PO# \_\_\_\_\_

Submitted by \_\_\_\_\_ Date \_\_\_\_\_ Other \_\_\_\_\_

## 41672


### FULL PORT FORGED BRASS BALL VALVE W/ HI-FLOW HOSE DRAIN

### 1/2" FIP x MIP x FIP x HOSE



### 600 WOG - ISO 9001



ITEM #	SIZE	P/CARTON	P/CASE	A	B	C	D	E	F
41672	1/2"	1	30	1/2	3 3/8	1 9/16	1 1/8	1 3/16	2 5/16

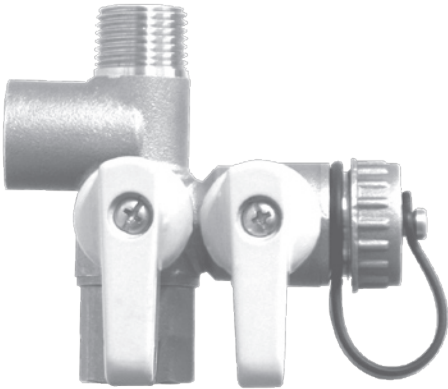

NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	SEAT	PTFE
3	BALL	BRASS HCP
4	END CAP	BRASS
5	CAP	BRASS
6	GASKET	NBR
7	STEM	BRASS
8	PACKING	PTFE
9	PACKING GLAND	BRASS
10	HANDLE	ALUMINUM
11	HANDLE SCREW	BRASS
12	STRAP	PLASTIC

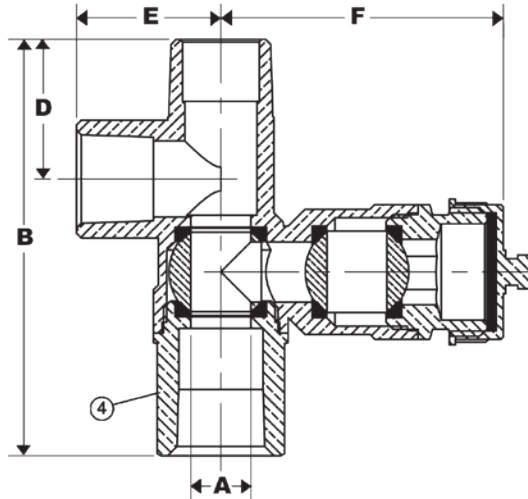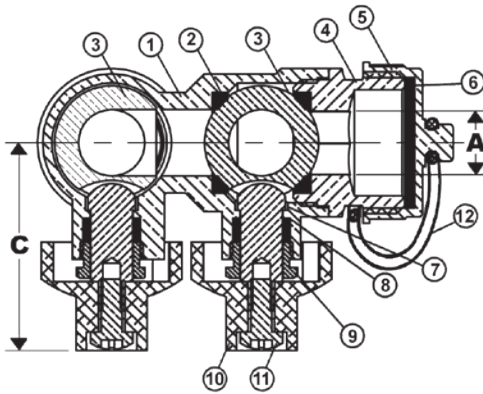

TEMP °F	WOG
100	600
150	490
200	470
250	439
300	411
350	294
366	N/A

Specifications: Designed for residential, commercial or industrial use with water, oil or gas. This approved Webstone Valve is actuated by a blowout proof stem and features an adjustable packing nut. This valve's MIP end also features an internal solder connection if the use of solder is preferred. MIP/SWT end complies with ASME B16.18. Threaded ends comply with ANSI B1.20.1.

**Webstone** Company, Inc.  
www.webstonevalves.com

Quality and Commitment Since 1954

Tel: (800) 225-9529 • Fax (800) 336-5133

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold.

4167spec\_041009