

CorStone®

Stop!


Read before installing your new sink.

Corstone bathroom sinks (lavatories) are designed to work with most manufacturer's drains and faucets. We have made every effort to design an outlet that will fit all brands and models of faucet drains. To ensure a complete and watertight installation of your lavatory drain, we recommend you install your drain assemble using the following installation guide.

As always, if you have any problems with installing your CorStone lavatory, do not hesitate to call customer service for help Monday thru Friday, 8:00am to 4:30pm CST at (334) 382-1991 or email info@corstonesinks.com.

If you have problem, call us, DO NOT RETURN your sink to the place of purchase. Our expert customer service representatives can usually solve any problems you have right over the phone.

Tighten nut to compress washer and silicone.

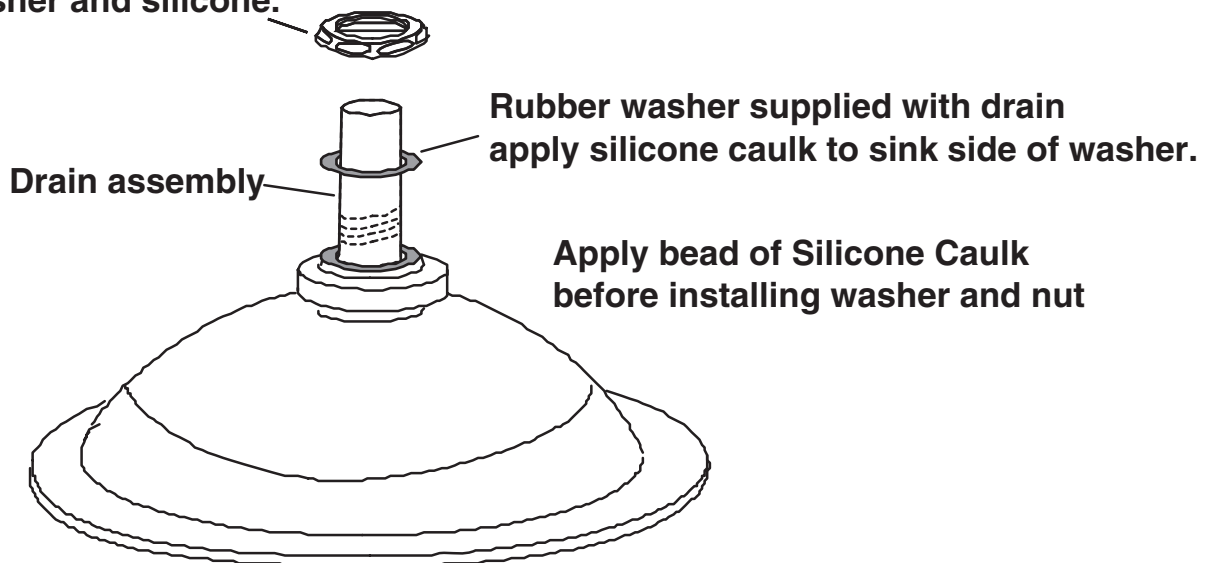

Place Lavatory face down and apply a bead of silicone caulk to the face of the drain outlet, use plumbers putty to seat the drain in the lav bowl and wrap teflon tape on all threads before joining parts of the drain. The application of the beads of silicone as shown will ensure a leak free installation using metal or plastic drains.