

# Lustertone® Deep Double Bowl Sink Models DLR and DLRQ Series

### **GENERAL**

Highest quality sink bowls seamlessly formed of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Top Mount.

### **DESIGN FEATURES**

Bowl Depths: 10" (254mm) [DLR291810]; 10-1/8" (257mm) [DLR(Q)332212 and DLR(Q)432212]. [all others]; 12-1/8" (308mm) Coved Corners: 1-3/4" (44mm) vertical and horizontal radius.

Bowl and Faucet Deck Recess: 3/16" (4mm) below outside edge of sink.

Finish: Exposed surfaces are hand blended to a Lustrous Highlighted Satin finish.

Underside: Fully undercoated to dampen sound and prevent condensation.

### **OTHER**

Drain Opening: 3-1/2"(89mm).

Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.

# Model DLR(Q)3322104

## **SINK DIMENSIONS (INCHES)\***

U-Channel Model Number	Quick-Clip Model Number	Overall		Inside Bowl			Cutout in Countertop (1-1/2" (38mm) Radius Coners		No. of 1-1/4" (32mm) or 1-1/2" (38mm) Dia. Faucet Holes 4" (102 mm) centers	Minimum Cabinet Size
Nullibel	Number	L	W	L	W	D	L	W	4 (102 11111) 00111010	Size
DLR251910	-	25 (635mm)	19½ (495mm)	10 (254mm)	14 (356mm)	101/8 (257mm)	24¾ (257mm)	18% (479mm)	1, 2, MR2, 3, 4 or 5	30
DLR291810	-	29 (737mm)	18 (457mm)	12 (305mm)	12 (305mm)	10 (254mm)	28¾ (721mm)	17¾ (441mm)	1, 2, MR2, 3, 4 or 5	33
DLR331910	DLRQ331910	33 (838mm)	19½ (495mm)	14 (356mm)	14 (356mm)	101/8 (257mm)	32¾ (822mm)	18% (479mm)	1, 2, MR2, 3, 4 or 5	36
DLR332210	DLRQ332210	33 (838mm)	22 (559mm)	13½ (343mm)	16 (406mm)	101/8 (257mm)	32¾ (822mm)	21% (543mm)	1, 2, MR2, 3, 4 or 5	36
DLR332212	DLRQ332212	33 (838mm)	22 (559mm)	13½ (343mm)	16 (406mm)	121/8 (308mm)	32¾ (822mm)	21% (543mm)	1, 2, MR2, 3, 4 or 5	36
DLR372210	-	37 (940mm)	22 (559mm)	16 (406mm)	16 (406mm)	101/8 (257mm)	36¾ (924mm)	21% (543mm)	1, 2, MR2, 3, 4 or 5	42
DLR432210	<u>-</u>	43 (1092mm)	22 (559mm)	19 (483mm)	16 (406mm)	101/8 (257mm)	42% (1076mm)	21% (543mm)	1, 2, MR2, 3, 4 or 5	48
DLR432212	-	43 (1092mm)	22 (559mm)	19 (483mm)	16 (406mm)	121/8 (308mm)	42% (1076mm)	21% (543mm)	1, 2, MR2, 3, 4 or 5	48


<sup>\*</sup>Length is left to right. Width is front to back



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.


This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



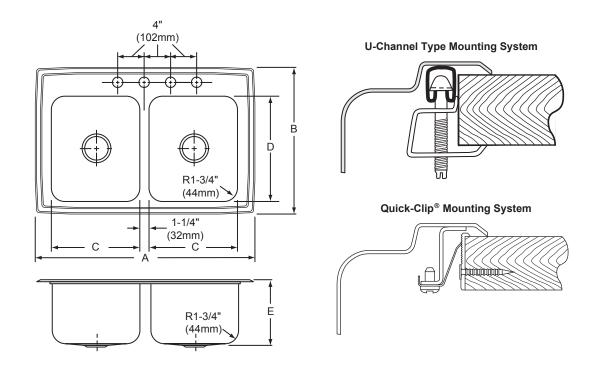

# **Hole Drilling Configurations**

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

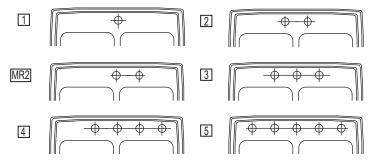

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.