

**Codes/Standards
Applicable**

- ANSI Z124.1.2
- CSA B45 Series

KEY BENEFITS

This extra-large model, complete with handy storage space and an integrated seat, transforms your shower into a true sauna for ultimate relaxation.

STANDARD FEATURE(S)

Integrated soap dishes, shelves and towel bar
Optional seat can be positioned on right or left side
Roof cap

COMMON OPTIONS


Steam kit seal option (for 40 to 44 in. sliding door)

Colors

Standard Acrylic Colors



Non-Standard Acrylic Colors

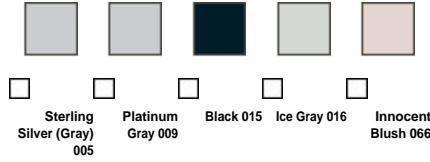

Colors shown are for reference purposes only and are subject to change without notice. Exact matches are not possible with your monitor display or printing method used.

Model Specifications, Options and Accessories

No	Model	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
<input checked="" type="checkbox"/> <input type="checkbox"/> 200005-S-000	200005-SR-000-XXX Right-hand seat 200005-SL-000-XXX Left-hand seat 200005-S-000-XXX No seat Specify: Standard colors: White (001), Bone (004), Biscuit (007) Non-standard colors: Sterling Silver (005), Platinum Gray (009), Black (015), Ice Gray (016), Innocent Blush (066) -	51 X 35 X 85 Door opening: 43 1/4 x 71 3/8	151	90

MAAX IES SYSTEMS

No	Model	Finish
<input checked="" type="checkbox"/> <input type="checkbox"/> OPT 10079-084	MAAX IES® 1/2 (factory installed) - 1/2 in. thermostatic valve with diverter - 6 adjustable body jets (2 soft massage and 4 pulsating jets)	Chrome
<input type="checkbox"/> OPT 10079-105	- Rail bar kit including 3-function hand shower with 69 in. hose - Water tester *Always installed on the opposite side of seat. If no seat, please specify (right or left).	Brushed Nickel

OTHER SYSTEMS

No	Model	Finish
<input checked="" type="checkbox"/> <input type="checkbox"/> OPT 10081	Steamax® kit 5 kw - 1 steam generator 220 volts, 5kw, 21 amp., 100 ft ³ capacity - 1 steam nozzle with essential oil reservoir - 1 electronic control to program temperature and time (60-minute countdown) For best steam bath results, we recommend full-height shower doors designed for the Steamax system. Steam nozzle and electronic control are factory-installed inside the unit. Available finishes: Chrome (084) and Brushed Nickel (105)	
<input type="checkbox"/> OPT 20171	Steamax® kit 5 kw with the "Auto-Flush" automatic drainage system - 1 steam generator 220 volts, 5 kw, 21 amp., 100 ft ³ capacity - 1 steam nozzle with essential oil reservoir - 1 electronic control to program temperature and time (60-minute countdown) - "Auto-Flush" automatic drainage system option allowing for the draining of the water tank after each use For best steam bath results, we recommend full-height shower doors designed for the Steamax system. Steam nozzle and electronic control are factory installed inside the unit. Available finishes: Chrome (084) and Brushed Nickel (105)	

(Continued on next page)

COMMON OPTIONS


✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	OPT 10086	Halogen light - cULus certified, 12V - clear - with switch (factory installed - installed in the center of roof cap)	5 X 4 1/2	2.5	N/A

Accessories

✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	10000006	Halogen light - certified cULus - 12V without switch (sold separately)	5 X 4 1/2	2.5	N/A
☐	10000041-084	PVC quick caulking shower drain, compression type (sold separately) Available finishes grid: Chrome (084) or Brushed Nickel (105)	3.5	0.25	
☐	10000041-105				
☐	10000042-085	PVC quick caulking shower drain with Polished Brass grid, compression type (sold separately)			
☐	10000043-084	2-piece ABS shower drain with Chrome stainless steel grid (sold separately)			
☐	10004349-XXX	ABS shower drain with ABS grid (sold separately) Available colors: White (001) and Bone (004)			
☐	10011461-000	Steam kit seal option (for 40 to 44 in. sliding door)			N/A
☐	10025471	"Auto-Flush" - Automatic drainage system for Steamax system	4 X 2 3/8 X 4 1/8	2	0.034

Shower doors

✓	No	Description
☐	138290	Triple Plus - three-panel sliding door 43 in.
☐	138923	Opulence - two-panel frameless sliding door 40 - 44 in.
☐	136453	Kleara ^R - two-panel frameless pivot door 42 1/2 - 45 1/2 in.

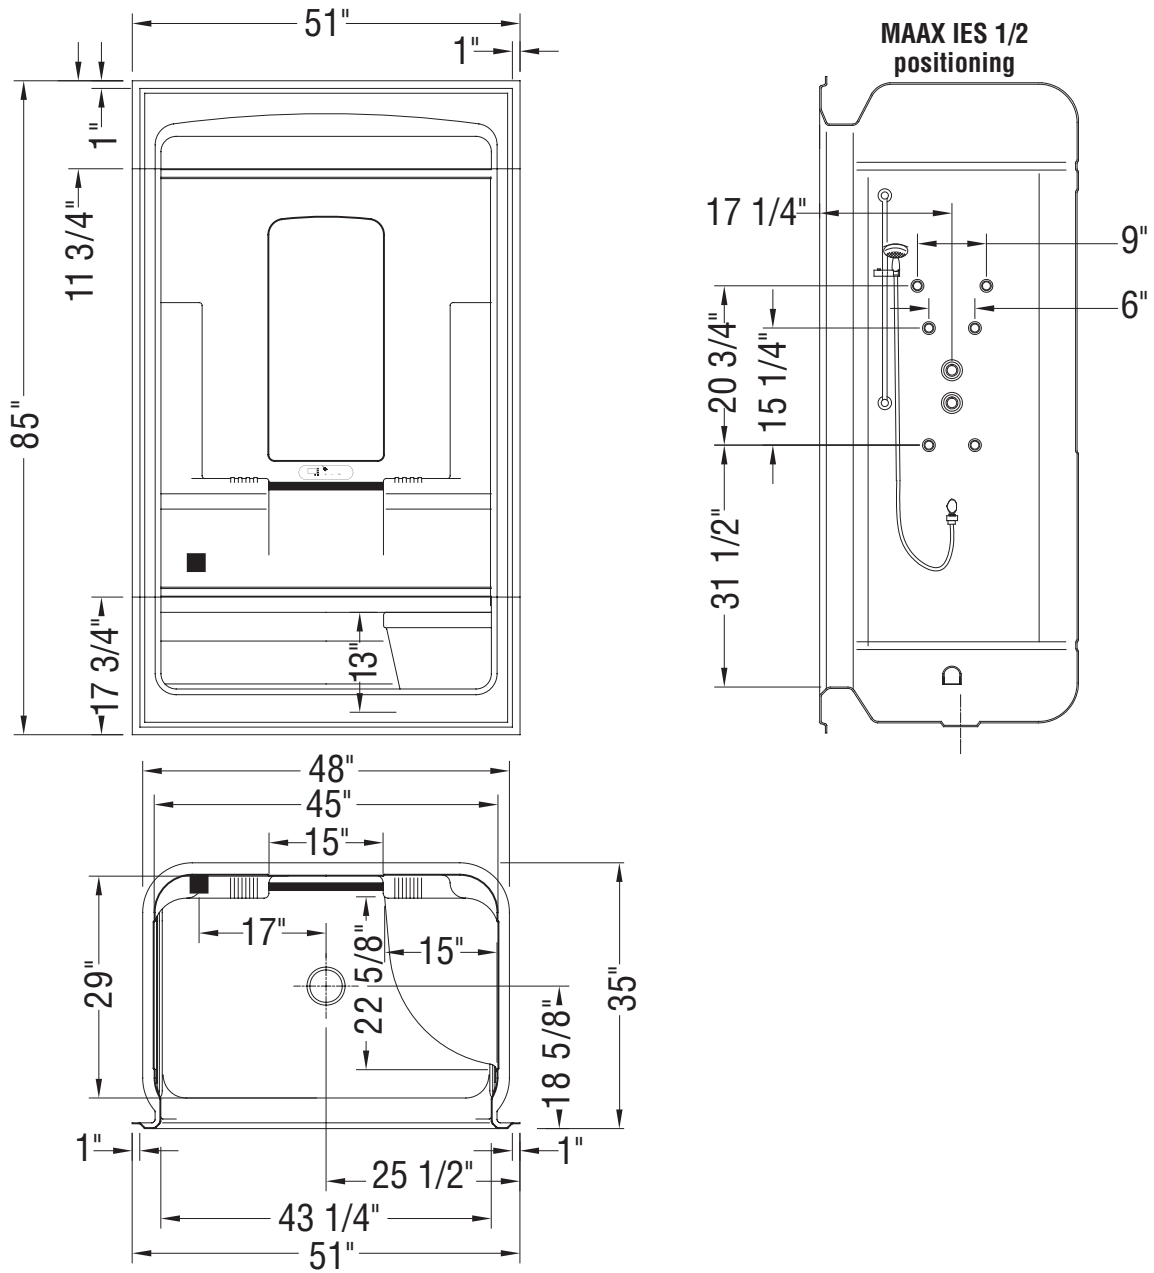

(■): Indicates Steamax nozzle positioning

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Canada	Alberta British Columbia Manitoba New Brunswick Newfoundland Nova Scotia Northwest Territories Ontario Prince Edward Island Quebec Saskatchewan Yukon Territory
United States	Alabama Alaska Arizona Arkansas California Colorado Connecticut Delaware District of Columbia Florida Georgia Hawaii Idaho Illinois Indiana Iowa Kansas Kentucky Louisiana Maine Maryland Massachusetts Michigan Minnesota Mississippi Missouri Montana Nebraska Nevada New Hampshire New Jersey New Mexico New York North Carolina North Dakota Ohio Oklahoma Oregon Pennsylvania Rhode Island South Carolina South Dakota Tennessee Texas Utah Vermont Virginia Washington West Virginia Wisconsin Wyoming
International	Jamaica Switzerland Korea China Taiwan Pilipinas Vietnam Malaysia Singapore Egypt Kuwait Dubai Qatar Saudi Arabia Bermuda Turks & Caicos Dominican Republic Panama Costa Rica Guatemala Colombia

Here are the electrical specifications for all MAAX Collection shower therapeutic systems offered in the United States.

PLEASE NOTE THAT SOME SYSTEMS MAY NOT BE AVAILABLE ON THE PRODUCT YOU HAVE SELECTED.

Please refer to the *Common Options* and *Massage System(s)* sections for more details.

STEAMAX	
Requires a dedicated 240 Volt, 1 phase circuit.	
All acrylic showers	5kW / 240V / 21A
Exposé™ Shower	6kW / 240V / 25A

SHOWER LIGHT
Requires a dedicated circuit protected by a Class A GFCI.

Installation Note

Install this product according to the *Installation Guide*.
All electrical wiring must be done per national/local electrical codes.