





QUARRY TILE

FIELD TILE

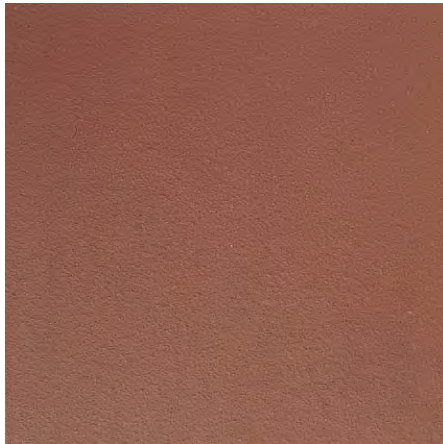

RED BLAZE 0Q40 (1)

(1), (2), (3) indicate price groups, (1) being the least expensive




BLAZE FLASH 0Q41 (2)




TEMPEST GRAY 0Q44 (3)



ARID GRAY 0Q42 (2)



ARID FLASH 0Q48 (2)



GOLDEN DUNE 0Q43 (2)



GOLDEN FLASH 0Q45 (2)



BRONZE 0Q62 (2)

Tile Notes:
 1. All colors are available in abrasive grain 6 x 6.
 2. Only 0Q40 and 0Q41 are available in abrasive grain in 4 x 8.
 3. Double abrasive available on field tile in all colors on a special order basis.

SIZES

		Sq. Ft. Per Carton	Pieces Per Carton
6 x 6 Field Tile	(6" x 6") (15.2 cm x 15.2 cm)	11.00	44
4 x 8 Field Tile*	(4" x 8") (10.2 cm x 20.3 cm)	10.76	50

*0Q40 & 0Q41 only

TRIM

Type	Number	Size	Pieces per carton
Bullnose	Q-1485*†	4 x 8	50
Bullnose Corner	QCR-L-1485*†	4 x 8	20
Bullnose	Q-1665*	6 x 6	44
Bullnose Corner	QCRL-1665*	6 x 6	44
Cove Base	Q-3565▲	5 x 6	44
Cove Base Corner	QCR-L-3565*▲■	5 x 6	20
Cove Base Inside Corner	QB-3565▲	1 x 5	25
Cove Base Outside Corner	QC-3565▲	1 x 5	20

*Available in abrasive grain

†Available in colors 0Q40 and 0Q41 only

▲ Not available in Flash colors; use coordinating solid

■ Special Order

INSTALLATION

Thickness	Grout Joint Recommendation	Shade Variation
1/2"	3/8"	Medium (V2)

COMMERCIAL USAGE

APPLICATION	INTERIOR			EXTERIOR	
	Residential	Light Commercial	Commercial	Residential	Commercial
Floors/Patios	✓	✓	✓	✓	✓*
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking*	✓	✓	✓	✓	✓
Pool Lining	✓	✓	✓	✓	✓

Suitable for freezing and non-freezing climates when proper installation methods are followed. Suitable for industrial installations requiring high compressive strength. We do not recommend light colored quarry tile in commercial kitchens unless properly sealed or a grout release is used. It is necessary to follow the proper procedures and recommendations from the grout and maintenance products manufacturers.

*Abrasive grain only in non-freezing climates.

TEST RESULTS (Abrasive Grain only)

	ASTM#	Result
Water Absorption	C373	≤ 3.0%
Breaking Strength	C648	> 350 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Coefficient of Friction	C1028	Wet: ≥ 0.60
		Dry: ≥ 0.80
Coefficient of Friction (Abrasive)	C1028	Wet: ≥ 0.90
		Dry: ≥ 0.90

See page 514 for additional information on Test Results and Classifications. See "Factors to Consider" and "Important Product Warranty Information" on page 528.

RESIDENTIAL USAGE

SLIP RESISTANCE (WET) : 3

1 < .50
2 .50 - .59
③ ≥ .60

The higher the rating, the higher the slip resistance.

APPLICATION

Floors	Walls	Countertops	Exterior Patios	Exterior Pool Decks
F	W	C	EP	ED*

*Abrasive grain only.

QUARRY TEXTURES™



FIELD TILE




DIABLO RED 0T01 (1)

(1), (2) indicate price groups, (1) being the least expensive



ASHEN GRAY 0T03 (2)




ADOBE BROWN 0T05 (2)



SAHARA SAND 0T08 (2)



DESERT TAN 0T09 (2)



ASHEN FLASH 0T04 (2)



ADOBE FLASH 0T06 (2)



RED FLASH 0T02 (1)

Textures Notes:
Abrasive grain available in 6 x 6 and 8 x 8 sizes and 0T01, 0T03, 0T05, 0T08, 0T09, colors only.

SIZES

		Sq. Ft. Per Carton	Pieces Per Carton
8 x 8 Field Tile	(8" x 8") (20.3 cm x 20.3 cm)	11.11	25
6 x 6 Field Tile	(6" x 6") (15.2 cm x 15.2 cm)	11.00	44

TRIM

Type	Number	Size	Pieces per carton
Bullnose	Q-1665*	6 x 6	44
Bullnose Corner	QCRL-1665*	6 x 6	44
Cove Base	Q-3565▲	5 x 6	44
Cove Base Outcorner	QCR-L-3565*▲■	5 x 6	20
Cove Base Inside Corner	QB-3565▲	1 x 5	25
Cove Base	Q-3585▲	5 x 8	24
Bullnose	Q-1885	8 x 8	25
Bullnose Corner	QCRL-1885	8 x 8	25

* Available in abrasive grain

■ Special Order

▲ Not available in Flash colors; use coordinating solid color.

INSTALLATION

Thickness	Grout Joint Recommendation	Shade Variation
1/2"	3/8"	Medium (V2)

RESIDENTIAL USAGE

SLIP RESISTANCE (WET) : 3

1 < .50
2 .50 - .59
③ ≥ .60

The higher the rating, the higher the slip resistance.

APPLICATION

Floors	Walls	Countertops	Exterior Patios	Exterior Pool Decks
F	W	C	EP	ED*

*Abrasive grain only.

COMMERCIAL USAGE

APPLICATION	INTERIOR			EXTERIOR	
	Residential	Light Commercial	Commercial	Residential	Commercial
Floors/Patios	✓	✓	✓	✓	✓
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking*	✓	✓	✓	✓	✓
Pool Lining	✓	✓	✓	✓	✓

Suitable for freezing and non-freezing climates when proper installation methods are followed. Suitable for industrial installations requiring high compressive strength.

*Abrasive grain only

TEST RESULTS (Abrasive Grain only)

	ASTM#	Result
Water Absorption	C373	≤ 3.0%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Coefficient of Friction	C1028	Wet: ≥ 0.70 Dry: ≥ 0.70
Coefficient of Friction (Abrasive)	C1028	Wet: ≥ 0.80 Dry: ≥ 0.80

See page 514 for additional information on Test Results and Classifications. See "Factors to Consider" and "Important Product Warranty Information" on page 528.



SURETREAD™ AND PAVERS™

FIELD TILE



RED SURETREAD 0Q81



GRAY PAVER 0Q85
(Smooth Surface)



GOLDEN BROWN PAVER
0Q78 (Smooth Surface)



RED PAVER 0Q84
(Smooth Surface)



GRAY SURETREAD 0Q76



GOLDEN BROWN
SURETREAD 0Q75

SIZES

		Sq. Ft. Per Carton	Pieces Per Carton
6 x 6 Field Tile	(6" x 6") (15.2 cm x 15.2 cm)	12.00	48

Sizing differences may exist between Gray and Red colors. When mixing colors, check actual samples to ensure sizing compatibility.

TRIM

Type	Number	Size	Pieces per carton
Bullnose	P-1665	6 x 6	48
Bullnose Corner	PC-1665	6 x 6	26
Cove Base	P-3665	6 x 6	48
Cove Base Corner	PCR-L-3665	6 x 6	26
Cove Base Inside Corner	PB-3665	3/4 x 6	50

Suretread trim is a smooth trim. Tread surface is not available on trim.

INSTALLATION

Thickness	Grout Joint Recommendation	Shade Variation
3/8"	3/8"	Medium (V2)

COMMERCIAL USAGE

APPLICATION	INTERIOR			EXTERIOR	
	Residential	Light Commercial	Commercial	Residential	Commercial
Floors/Patios	✓	✓	✓		
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Lining	✓	✓	✓	✓	✓

Suitable for freezing and non-freezing climates when proper installation methods are followed. Suitable for industrial installations requiring high compressive strength. We do not recommend light colored quarry tile in commercial kitchens unless properly sealed or a grout release is used. It is necessary to follow the proper procedures and recommendations from the grout and maintenance products manufacturers.

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	≤ 3.0%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Coefficient of Friction	CI028	Wet: ≥ 0.60 Dry: ≥ 0.60

See page 514 for additional information on Test Results and Classifications. See "Factors to Consider" and "Important Product Warranty Information" on page 528.

RESIDENTIAL USAGE

SLIP RESISTANCE (WET) : 3

1 < .50

2 .50 - .59

③ ≥ .60

The higher the rating, the higher the slip resistance.

APPLICATION

Floors	Walls	Countertops	Exterior Patios	Exterior Pool Decks
F	W	C		