


# Getting Started with your **SECUREMOTE™**

## SecuRemote™ for Blackberry®

Download the SecuRemote™ Application for Blackberry®

1. Download the app through the Blackberry® App World™ on your mobile phone.

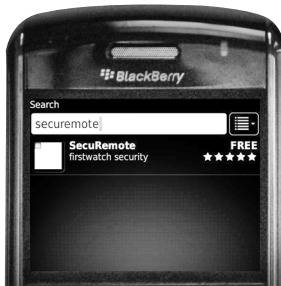

2. Type in “SecuRemote”.
3. Once the SecuRemote™ app appears, select download app.
4. Download the application. By default the SecuRemote™ application icon is placed in the download folder.




5. Make sure your Bluetooth® is turned on. To pair, your smartphone must be within 80-100 ft. of the SecuRemote™ device.

## SecuRemote™ for Android™

Download the SecuRemote™ Application for Android™

1. Download the app through the Android™ Market on your mobile phone.

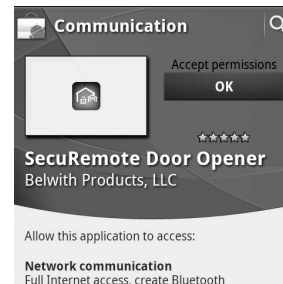

2. Type in “SecuRemote”.
3. Once the SecuRemote™ app appears, select download app.
4. Download the application. By default the SecuRemote™ application icon is placed on your home screen.



5. Make sure your Bluetooth® is turned on. To pair, your smartphone must be within 80-100 ft. of the SecuRemote™ device.

## SecuRemote™ for iPhone®

Download the SecuRemote™ Application for iPhone®

1. Download the app through the App Store™ on your mobile phone.




2. Type in “SecuRemote”.
3. Once the SecuRemote™ app appears, select download app.
4. Download the application. By default the SecuRemote™ application icon is placed on your home screen.



5. Make sure your Bluetooth® is turned on. To pair, your smartphone must be within 80-100 ft. of the SecuRemote™ device.

## Installing the SecuRemote™ Device


1. Unwrap the SecuRemote™ device and take note of the serial number on the side of the device. You and your users will need it when pairing the device with your smartphone.
2. Attach the mounting plate to a wall or ceiling location close to an AC outlet using the screws included in the box. Or use double sided tape to place the device onto the garage door opener.

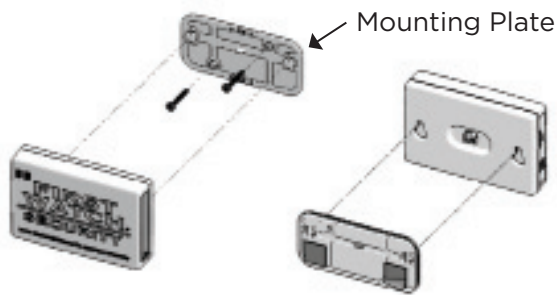

3. Attach the bell wires of the SecuRemote™ device to (a) the wall console button or to (b) the control connectors on the door opener. Match wire colors together.
4. Plug the SecuRemote™ power adapter into an AC outlet.
5. Ensure that the green power light is on.

5. Ensure the green power light is on.

3. Attach the bell wires.

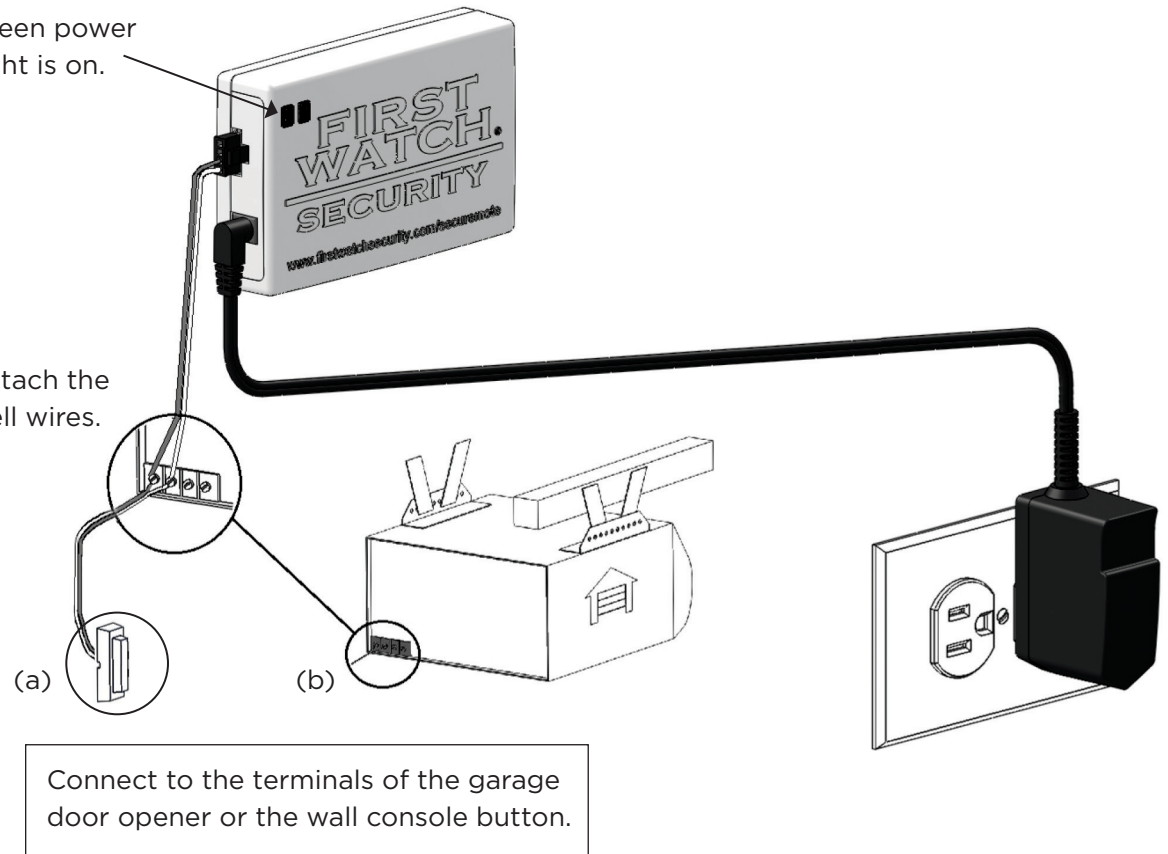

### Two ways to learn even more

1. Visit us at [www.firstwatchsecurity.com](http://www.firstwatchsecurity.com) to download an extensive user manual for each mobile phone platform.
2. Extend the capabilities and security of SecuRemote™ beyond what's available "out of the box" with scheduling, auditing, and other features at [www.firstwatchonline.com](http://www.firstwatchonline.com)

### Additional Information

Please contact our customer service at 888-845-9597 for additional questions.