



# Installation And Safety Instructions

# LR-150

Line art shown may not exactly match the fixture enclosed. However, the installation instructions do apply to this fixture. Fill in Item Number on Carton and File This Sheet For Future Reference. ITEM# \_\_\_\_\_

040909

## ASSEMBLY

1. See fixture instruction sheet for disassembly of pendant before installing glass.
2. Determine what part bag you are using.

## PART BAGS

### PART BAG A – Figure 1

 Glass Supporter

### PART BAG B – Figure 2

 Support


### PART BAG C – Figure 3

 Socket Locator  Retaining Ring

### PART BAG D – Figure 4

 Socket Locator  Retaining Ring  Spider

### PART BAG E – Figure 5

 Glass Supporter

### PART BAG F – Figure 6

 Spider

### PART BAG G – Figure 7

 Glass Supporter  Socket Locator  Retaining Ring

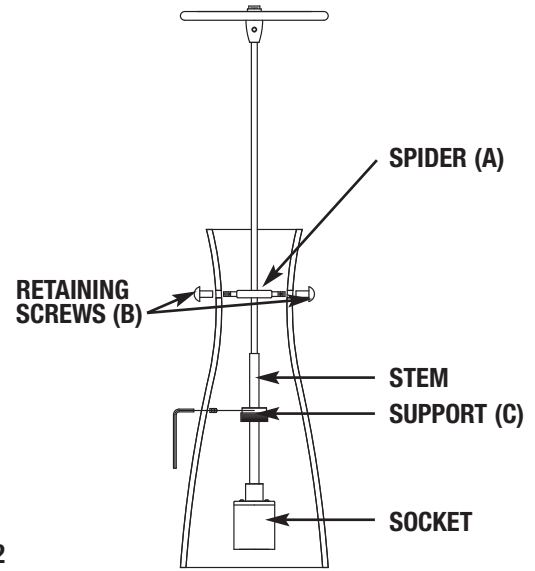


FIGURE 2

1. Bring the socket and stem through the top of glass. Bring spider (A) over socket and secure by threading retaining screws (B) through glass into spider (A).
2. Set support at desired location on stem and secure by tightening set screw with allen wrench.

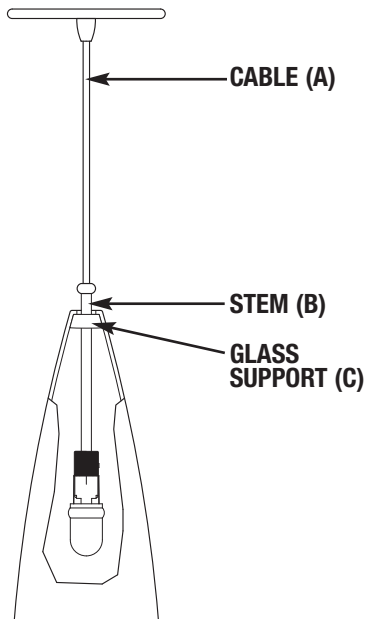


FIGURE 1

1. Determine desired location for glass to hang. Place glass support (C) onto stem (B) and secure in place by tightening set screw with supplied allen wrench.
2. Pull cable (A) through glass and place glass on glass support (C) so it rests evenly.

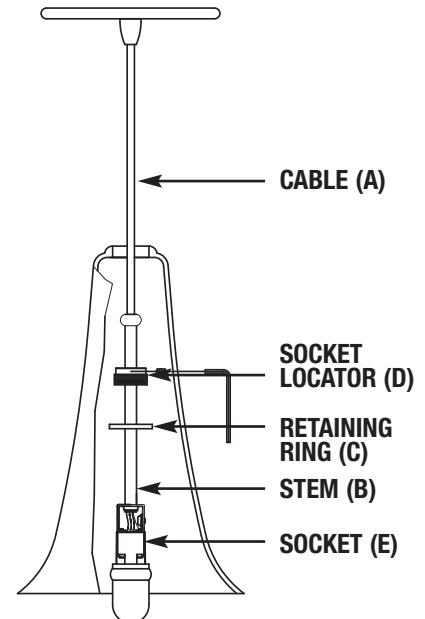


FIGURE 3

1. Remove retaining ring (C) from socket locator (D) and set aside.
2. Slide socket locator (D) onto stem (B). Secure the socket locator (D) at desired height with supplied allen wrench.
3. Secure the threaded ring (C) to the socket locator (D).
4. Pull cable (A) from bottom of glass through top opening in glass.
5. Glass should rest on retaining ring.

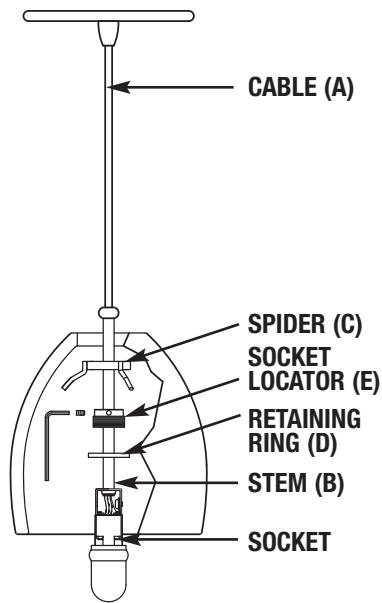


FIGURE 4

1. Remove retaining ring (D) from locator (E) and set aside.
2. Slide the socket locator onto stem (B). Secure the socket locator (E) with the allen wrench to the desired length on the stem (B).
3. Secure the threaded ring (D) to the socket locator (E).
4. Slide spider (C) onto stem (B) and fit on top of retaining ring (D).
5. Pull cable (A) from bottom of glass through top opening in glass.

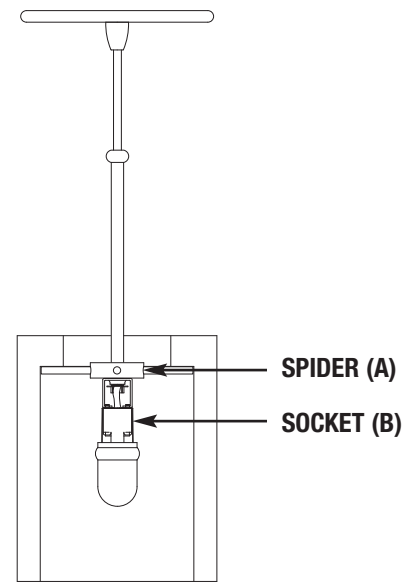


FIGURE 6

1. Spider (A) should rest on top of socket (B). You will need to remove wiring connections at splice compartment (if applicable) or remove wire from mono point canopy.
2. Place glass on spider (A) so it rests evenly.

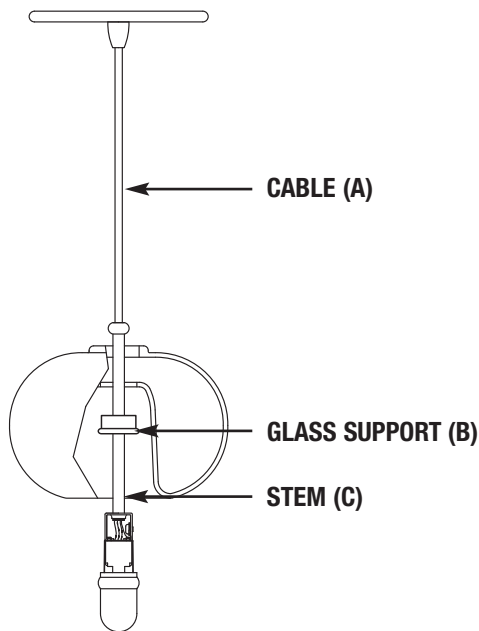


FIGURE 5

1. Slide glass support (B) through cable (A) and onto stem (C).
2. Pull cable (A) through bottom of glass so glass rests securely in glass support (B)

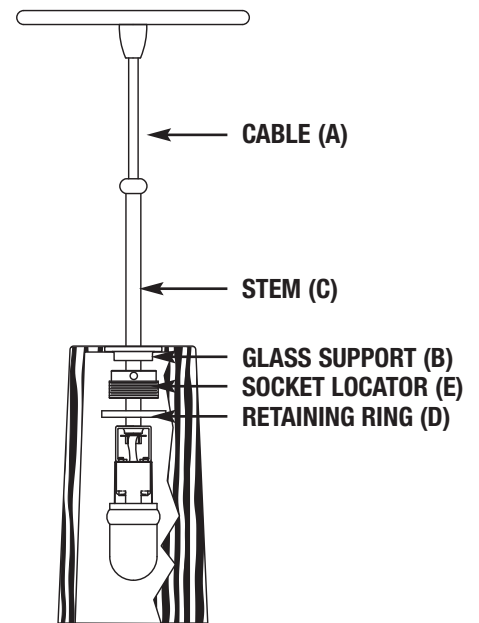


FIGURE 7

1. Remove retaining ring (D) from socket locator (E) and set aside.
2. Slide the socket locator (E) onto stem (C). Secure the socket locator (E) with the allen wrench to the desired length on the stem (B).
3. Secure the retaining ring (D) to the socket locator (E).
4. Rest glass support (B) on top of socket locator (E) and retaining ring (D).
5. Place glass on top of glass support (B).

**FINAL ASSEMBLY**

1. Reassemble pendant according to pendant instructions.