




INSTALL GLASS

- To install glass, position square part (A) in center of glass (B) and align holes in glass (B) with holes on square part (A).

- Slide stems (C) through the glass into square part (A).

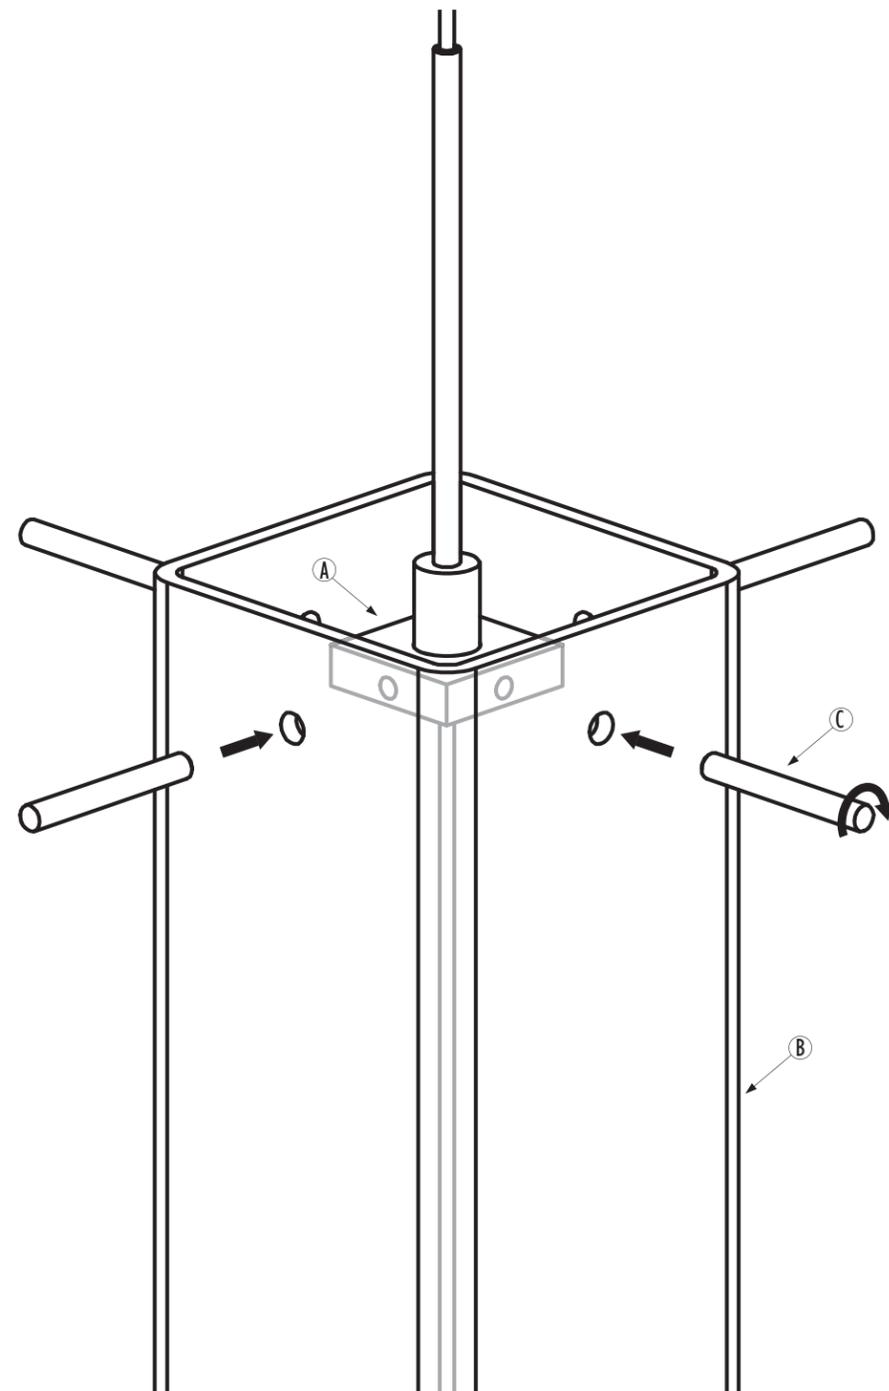

HOUSTON LED DOWN

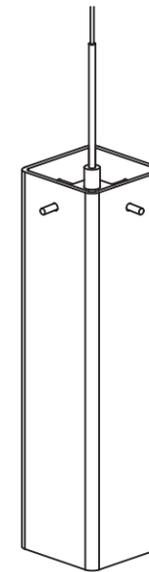

IMPORTANT SAFETY INSTRUCTIONS


1. Save these instructions and refer to them when additions to or changes to the fixture are made.
2. KEEP THIS INSTRUCTION AND REFER TO THEM WHEN ADDING ADDITIONAL FIXTURES, MODIFICATIONS, OR SERVICES ARE MADE.
3. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH THE APPLICABLE NEC CODE.
4. Do not install this fixture in damp or wet locations.
5. CAUTION - Do not install any fixture assembly closer than 6 inches from any curtain, or similar combustible material. Turn off power prior to any work on the systems. Warranty is void in case of unauthorized modifications and/ or improper use.

READ ALL OF THESE INSTRUCTIONS BEFORE INSTALLATION

PART NUMBERS

222 850bz	bronze, white glass	222 852bz	bronze, red glass
222 850ch	chrome, white glass	222 852ch	chrome, red glass
222 850mc	matte chrome, white glass	222 852mc	matte chrome, red glass
222 851bz	bronze, vanilla glass	222 853bz	bronze, orange glass
222 851ch	chrome, vanilla glass	222 853ch	chrome, orange glass
222 851mc	matte chrome, vanilla glass	222 853mc	matte chrome, orange glass

INSTALLATION INSTRUCTIONS

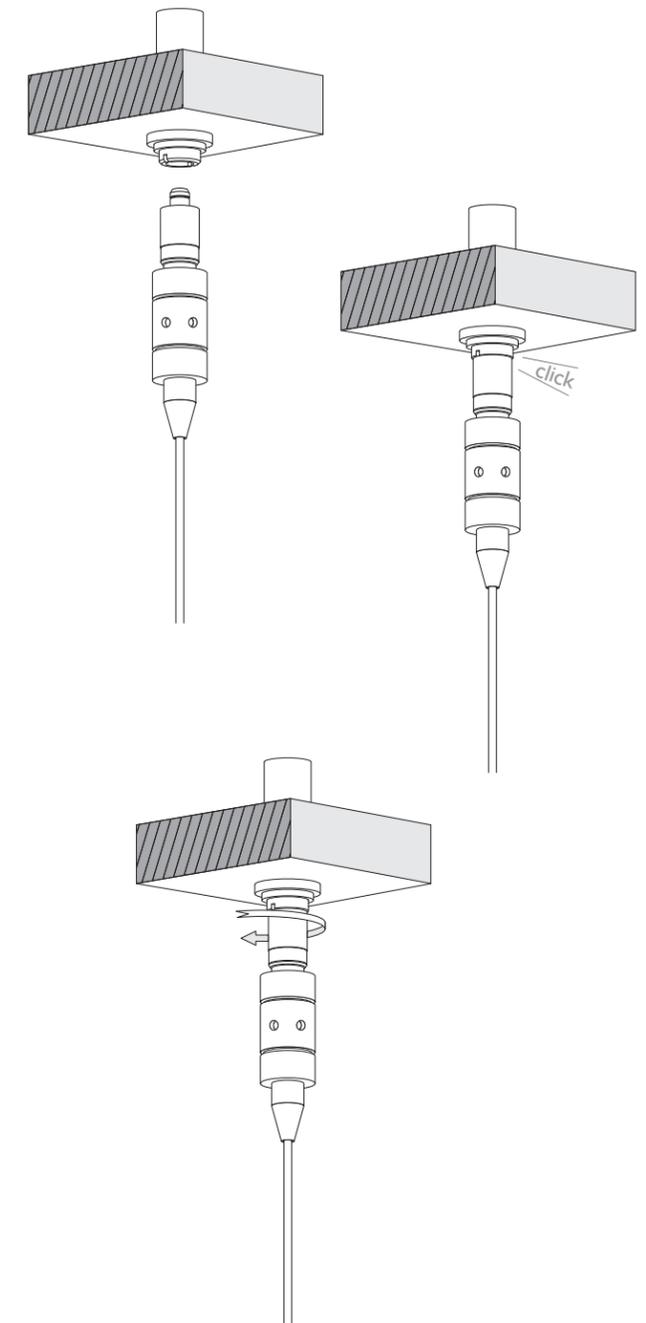

NOTE

Fixture cannot be shortened in the field.

INSTRUCTIONS FOR USE

- Mount the fixture to the canopy or adaptor by plugging in the Uni-Plug. The Uni-Plug will 'click' when properly inserted. Tighten the retaining collar to complete the installation (see diagram).