



Job Name:

Contact:

Fixture Type:

Part Number:

KAIROS III WITH UNI-PLUG



### Description:

The Kairos III is a linear pendant that offers a clean, indirect fluorescent up-light with the option of attaching three of Bruck's 12 volt Uni-light fixtures for directional down light.

The directional Uni-light fixtures are easily installed with a simple click and twist into three Uni-light plugs located on the underside of the Kairos III fixture. Each Uni-light plug can accommodate up to 50 watts. ([link to Uni-lights](#))

The indirect light is produced with a T-5 high output 54 watt fluorescent lamp that is preinstalled into the pendant (replaceable). A lens is then placed on top of the pendant to distribute the light evenly.

The Kairos III includes the ballast and the transformers inside its slender housing providing a simple line-voltage connection in the junction box. The indirect and directional down lights are pre-wired for separate switching. A square canopy is included to cover a standard junction box.

### Part Numbers:

**300454ch**

chrome

**300454mc**

matte chrome

### Technical Specs:

120V AC, 50/60Hz input

212VA, 209W total:

62VA, 62W for 1 (54 Watt lamp)

Mini Bi-pin socket (for F54T5HO)

3 x 50VA, 49W maximum

Uni-plug

Suitable for dry locations only

Mounts over 3" - 4" round J-box



Short circuit protection

Overload protection

Thermal Protection

Independently switchable sources

### Housing:

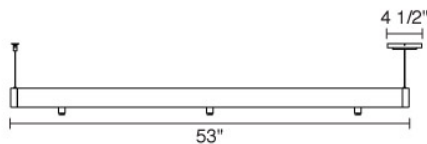

- Extruded aluminum
- Cast aluminum end caps
- Aluminum reflectors
- Stainless steel hardware
- Impact resistant polycarbonate lens

**Electrical:**

3 x 60W 12VAC transformer

**Mounting:**

4.5" square cover over j-box  
Aircraft cable support  
Support length of 59" supplied

**Finish:**

Electro-plated chrome and matte chrome

**Relamping:**

Always use only manufacturer recommended T5HO lamp. Remove prismatic lens cover and rotate red socket counterclockwise to remove existing lamp. Install new lamp and rotate red socket clockwise to locked position. LED not field replaceable.  
CAUTION: Lamp might be hot. Turn off fixture and wait til lamp is cool to touch. Remove lamp carefully from socket (if needed, unscrew glass). Replace lamp.

**Includes:**

F80T5HO 3500k lamp  
8 3W warm white LED