



Job Name:

Contact:

Fixture Type:

Part Number:

KAIROS I



Description:

The Kairos I is a simple, slender design that offers stunning lighting quality for sophisticated workstation architecture. The luminaire combines the indirect, diffuse ambient lighting of a fluorescent lamp, with the direct, lighting of 8 3W LEDs for the desk. The light from the Kairos I promotes a productive and healthy working environment. It is available with a perfectly-finished chrome surface.

Part Numbers:

300441-1ch chrome

300441-1mc matte chrome

Technical Specs:


120-277V AC, 50/60Hz input

112VA, 109W total:

92VA, 89W for 1 (80 Watt lamp)

Mini Bi-pin socket (for F80T5HO)

20VA, 20W for 8 (3 Watt LED)

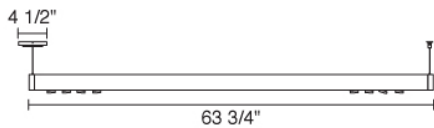

Short circuit protection

Overload protection

Thermal Protection

Independently switchable sources

Housing:

- Extruded aluminum
- Cast aluminum end caps
- Aluminum reflectors
- Stainless steel hardware
- Impact resistant polycarbonate lens

Electrical:

T5HO fluorescent ballast

G5 mini bi-pin sockets

Mounting:

4.5" square cover over j-box

Aircraft cable support
Support length of 59" supplied

Finish:

Electro-plated chrome and matte chrome

Relamping:

Always use only manufacturer recommended T5HO lamp. Remove prismatic lens cover and rotate red socket counterclockwise to remove existing lamp. Install new lamp and rotate red socket clockwise to locked position. LED not field replaceable.

CAUTION: Lamp might be hot. Turn off fixture and wait til lamp is cool to touch. Remove lamp carefully from socket (if needed, unscrew glass). Replace lamp.

Includes:

F80T5HO 3500k lamp
8 3W warm white LED