

1980T-DST▲



Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_




## BAR/PREP FAUCETS

- Pilar® Series
- Single Handle Widespread Deck Mount
- 2 Hole Sink Applications
- Quick Snap® Hose Installation
- DIAMOND™ Valve with Innoflex® Waterways
- Integrated Supply Tubes
- Touch<sub>2</sub>® Technology

### STANDARD SPECIFICATIONS:

- 3/8" O.D. straight, staggered pex supply tubes - 35" (889 mm) and 36" (914 mm) long.
- 6 5/8" (168 mm) long, 9 1/2" (241 mm) high spout swings 180°.
- Control handle shall return to neutral position when valve is turned off.
- Quick Snap® hose installation.
- Recommended hole sizes 1 3/8" (35 mm) on 4" (102 mm) centers.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Control mechanism is a diamond coated ceramic cartridge.
- Maximum flow rate of 1.5 gpm @ 60 PSI.
- Delta Touch<sub>2</sub>® Technology controls water flow.
- On-Off indicator light also signals when batteries run low.

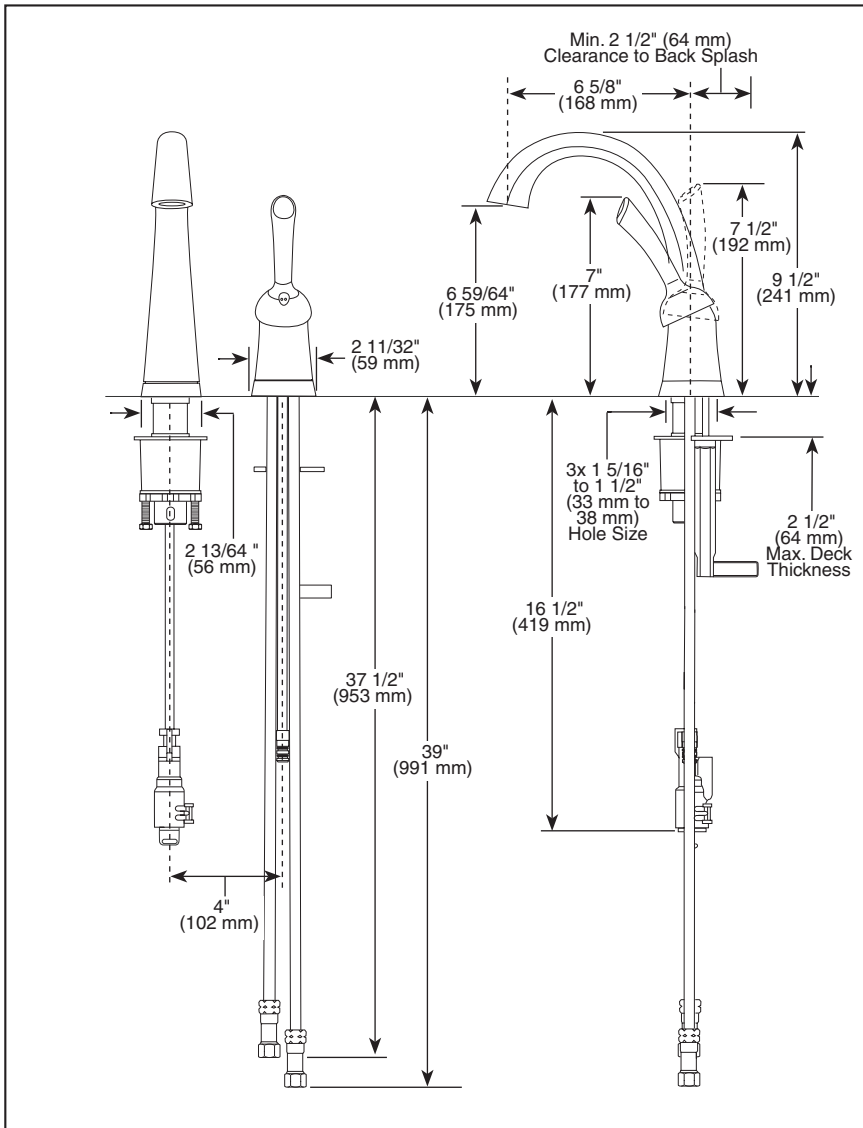

▲ Designate Proper Finish Suffix


### WARRANTY

- 5 Year Limited Warranty on faucet, finish and electronics.



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

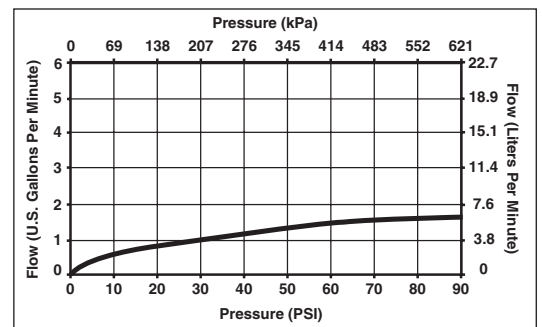

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

DSP-K-1980T-DST Rev. A



55 E. 111th Street, Indianapolis, Indiana 46280  
 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2  
 © 2009 Masco Corporation of Indiana