



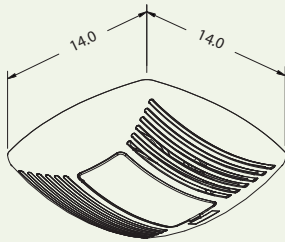

Delta Breez Ventilation Fan / Light Combo Specifications


VFB25ACL
(80 CFM)

Dimensions

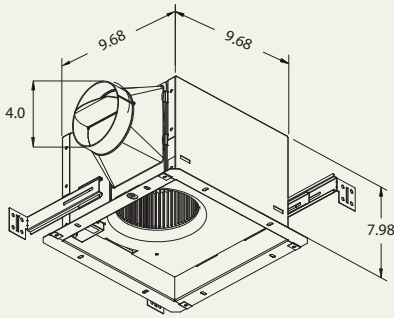

UNIT: INCH

Fan Curve

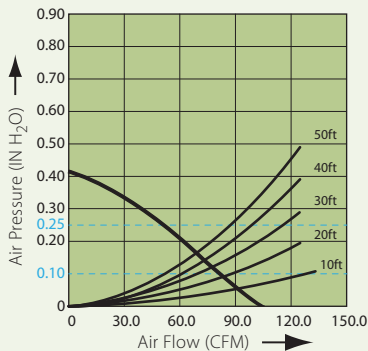

Description

Low noise ceiling mount ventilating fan with DC Motor and light rated for continuous running. Evaluated by Underwriter Laboratories and conforms to both UL and cUL safety standards.

Motor/Blower

- Power Rating of 120volts/60Hz.
- DC Brushless motor engineered to run continuously.
- Motor equipped with thermal cutoff fuse.
- Permanently lubricated motor.

Housing

- Galvanized steel body.
- Detachable 4" diameter duct adapter.
- Built in backdraft damper.
- Easy installation.

Grille

- Attractive design using ABS material.

Light

- One GU24 26-Watt compact fluorescent lamp included.
- One E12 4-Watt night-light included.

Warranty

- 3 year limited warranty.

Features

- For ceiling mount only, air flow of 80 CFM ($\pm 10\%$) and 0.6 Sones at 0.1" static pressure.
- Power consumption approximately 9.6 Watts with an efficiency rating approximately 9.6 CFM/Watt at 0.1" static pressure.
- Duct diameter no less than 4".
- UL and cUL listed for tub/shower enclosure when used with GFCI branch circuit wiring.

DC Motor Technology

- Built in soft start function to increase bearings life.
- Automatically powers OFF when impeller is locked abnormally.

Specifications

VFB25ACL	4" Duct (Standard)	
Static Pressure (Inches w.g.)	0.1	0.25
Air Flow (CFM)	80	50.5
Sones	0.6	1.0
Power Consumption (Watts)	9.6	10.0
Energy Efficiency (CFM/Watt)	8.50	5.02
Speed (RPM)	904	1095
Current (Amps)	0.15 @ 120 Vac	
Power Rating (V/Hz)	120 / 60	
Lamp (Watts)	26	
Night-light (Watts)	4	